

Big Springs 2021 Exploration Program

HIGHLIGHTS:

- Comprehensive data review and targeting study on Big Springs completed.
- Study led by Carlin-style gold mineralisation authority, Dr Steve Garwin.
- Identification of 18 high-priority near mine targets and 41 high-potential district targets.
- Approximately 10,000 metres drilling planned in 2021; targeted to commence in September.
- Drilling to be predominantly focussed on new target testing beyond known mineralisation.
- Systematic soil sampling and geology mapping planned to test selected district targets at Mac Ridge North, Jack's Creek and Golden Dome.
- In-fill gravity and IP surveys also planned to target structures intersections and sulphide mineralization at depth at Sammy's area, Dorsey Creek, and Mac Ridge.
- Total exploration budget for 2021 at Big Springs of approximately A\$3M.

Anova Metals Limited (ASX: AWW) (**Anova** or the **Company**) is pleased to announce completion of the comprehensive data review and targeting study at its 100%-owned Big Springs Gold Project in Nevada, USA (**Big Springs**). Concurrent with the completion of this targeting activity is the finalisation of the extensive exploration program planned to be conducted at Big Springs in 2021.

The centrepiece of this 2021 exploration program is approximately 10,000 metres of resource extensional and new target drilling to be conducted across high-priority targets identified in the targeting study. This drilling is set to be complemented with expansive soil sampling and mapping activities in high-potential district areas (covering approx. 20 km²) and in-fill gravity and IP geophysics surveys to detect structures and covered sulphide mineralisation (covering approx. 10km²).

Anova Managing Director and CEO, Dr Mingyan (Joe) Wang, commented:

"The completion of the Big Springs targeting study is the culmination of an extensive data review involving substantial and highly integrated geochemical, geophysical and geological analyses. We are fortunate to have had the leadership of Dr Steve Garwin, and the benefit of his deep Carlin-style, Nevada gold expertise, in conducting this modern, foundational assessment of Big Springs."

"We have been able to utilise the results of this targeting study to design an exploration program for this field season targeted at truly demonstrating the potential size of resource endowment that Big Springs possesses. We have been systematic in our target generation and ranking, and we will now be systematic in our testing of these opportunities. Exploration activities at Big Springs are expected to commence in September and we look forward to reporting to shareholders on our progress in delivering, and the key outcomes from, this extensive program."

Big Springs targeting study outcomes

The style of gold mineralisation at Big Springs shares similarities to the nearby Jerritt Canyon gold operation and the world-class gold mines of the Carlin-, Cortez- and Getchell-Trends in Nevada. Dr Steve Garwin, one of the world's leading authorities on Carlin-style gold mineralisation, led the Big Springs data review and targeting study. Dr Garwin's previous roles include Chief Geologist, Newmont Mining (NYSE: NEM) in Nevada and Technical Director, Battle Mountain Gold (TSX-V: BMG). Dr Garwin's oversight and guidance was instrumental in the discovery and resource definition of the Tier 1 Alpala Cu-Au-Ag porphyry deposit in northern Ecuador. A profile of Dr Garwin is included in the Appendix to this release.

Gold mineralisation at Sammy's Area, Mac Ridge, Beadles Creek and Dorsey Creek predominantly occur either along the NNE structure and intersected by ENE to WNW striking faults. Unit D, a silty dolomites, is the dominant gold mineralisation hosting rock. It can be highly fractured and sheared. Felsic dyke is mineralised at Dorsey Creek. Hanson Creek Formation is the hosting unit at Jerritt Canyon. Geophysical analysis of South Sammy, Mac Ridge, Beadles Creek demonstrates that mineralisation occurs close to gravity highs.

In accordance with criteria above, the Big Springs targeting study has led to the identification of 18 high-priority near mine targets and 41 high-potential district targets (Figure 1 and 2).

Near mine targets

Eighteen near-mine targets show potential to expand existing gold resources and delineate ore shoots with >5g/t Au and zones of structural intersection. Twelve of them are to test the deep extension of the high grade shoots at North Sammy, four are to expand mineralisation at South Sammy, and two at Beadles Creek follow up historical drill holes. Nine of the near mine targets will be tested during 2021 drilling program, including seven from North Sammy and two from Beadles Creek (Figure 1).

District targets

District targets are identified areas of anomalous gravity results and favourable geology for carlin style mineralisation. The criteria for selecting district targets included a favourable broad scale gravity signature, structural pathway-fault complexity and host rock reactivity. Other information such as surface geochemical results and magnetic- and hyperspectral-imagery support the targets identified.

Of the forty-one district targets, nineteen of the most compelling were highly recommended by Anova's consultants for subsequent surface exploration and drilling activities (Figure 2). Four of them within the mining permitted area will be tested by Anova's RC drilling program this year. Soil sampling, mapping, and geophysics survey are planned on other targets.

Further details from the targeting study are planned to be released in an investor presentation.

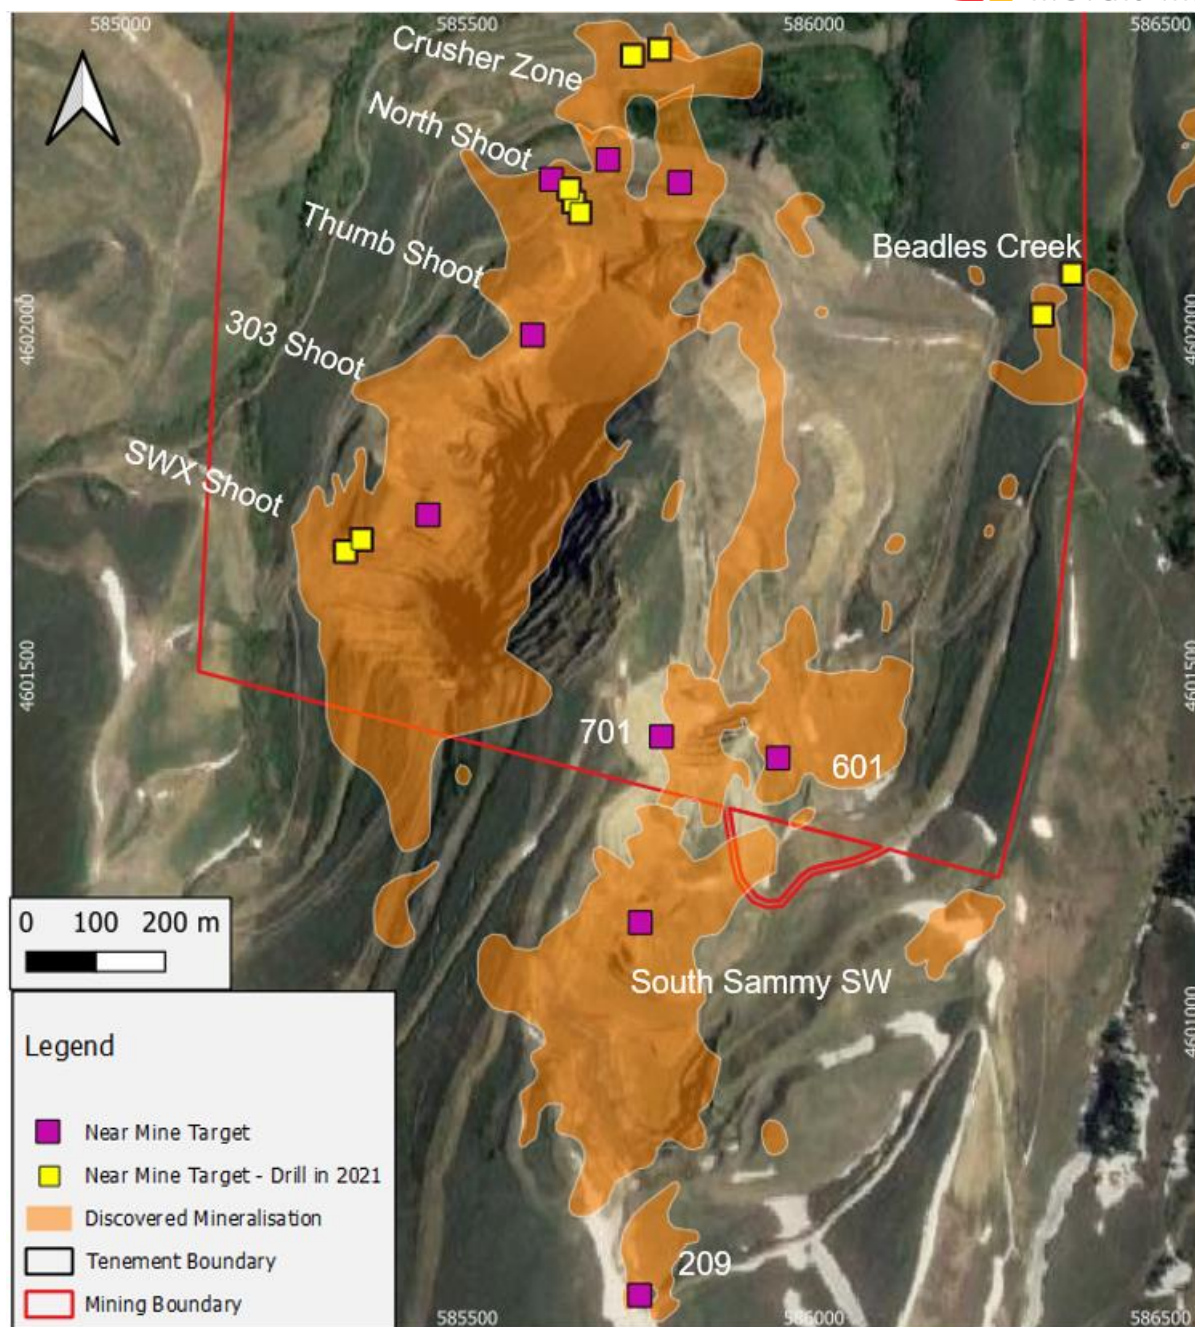


Figure 1: Eighteen near mine targets identified and nine of them will be tested in 2021 drilling program.

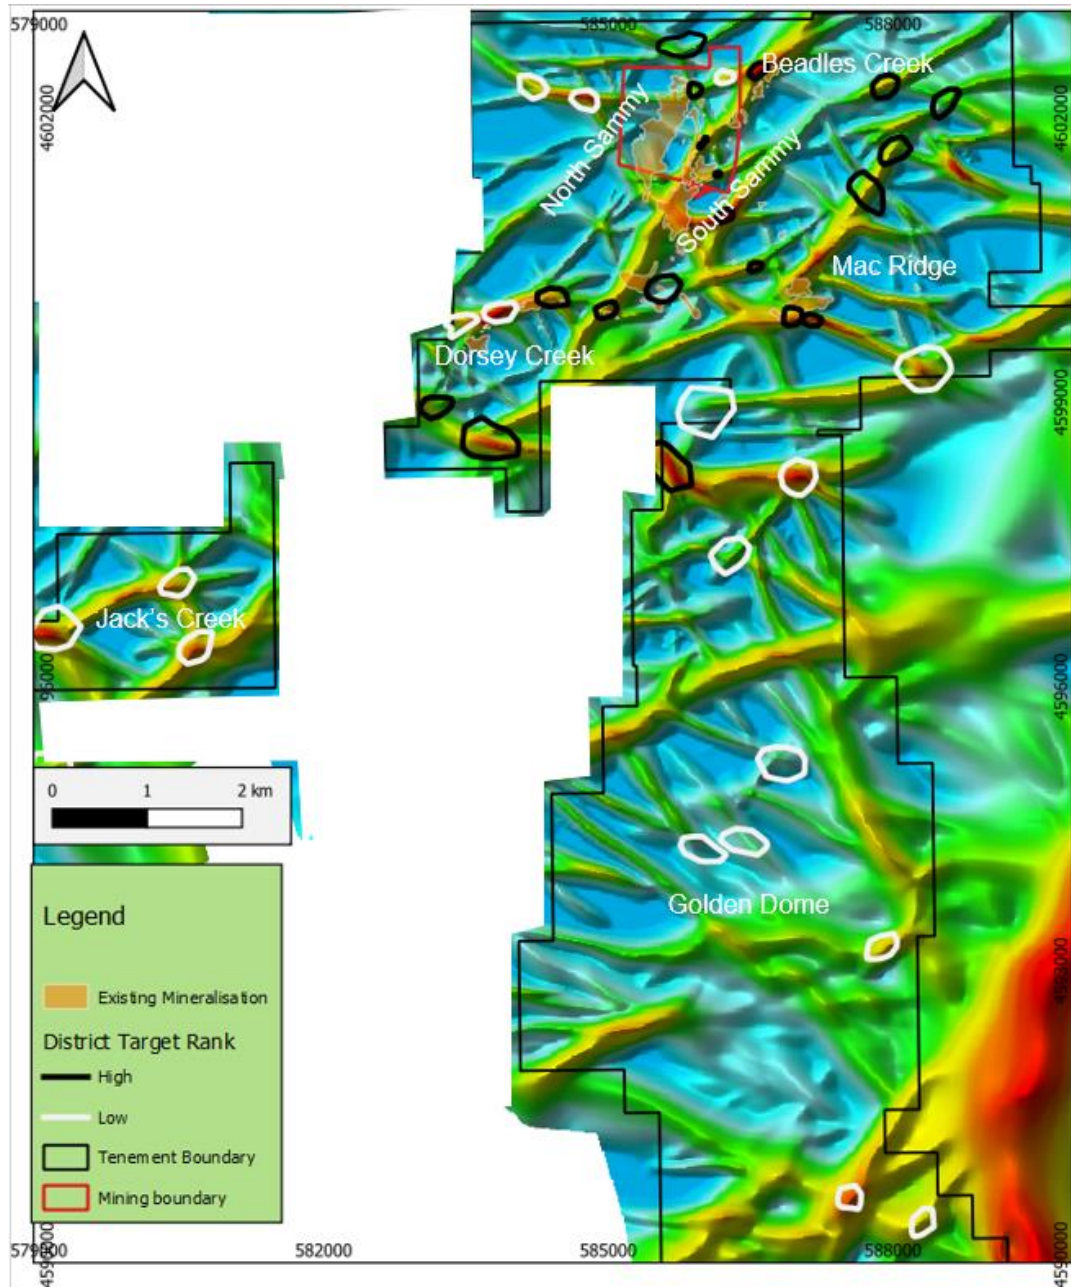


Figure 2: Gravity imaging identifies forty-one district targets with nineteen ranked as high priority. Four targets within the mining permitted area will be tested by the 2021 drilling program.

2021 exploration program

Drilling program

Approximately 10,000 meters of drilling is planned at Big Springs in 2021 comprised of resource extensional and new target drilling to be conducted across high-priority targets identified in the targeting study. A RC rig will be used because of its low cost and efficiency. Details of drilling program design is included in Table 1.

Permitting has been received for twelve holes for the total of approximately 3500 meters to test nine near mine targets (Figure 3). The new high grade shoot discovered from the 2020 drilling program (BS-006, 5.49M @ 15.23g/t Au) will be followed up (Figure 4a). Continuity at depth at 401

deposit, which returned intervals of 10.86m @ 3.96g/t Au in 2020 drilling program, will also be tested (Figure 4b).

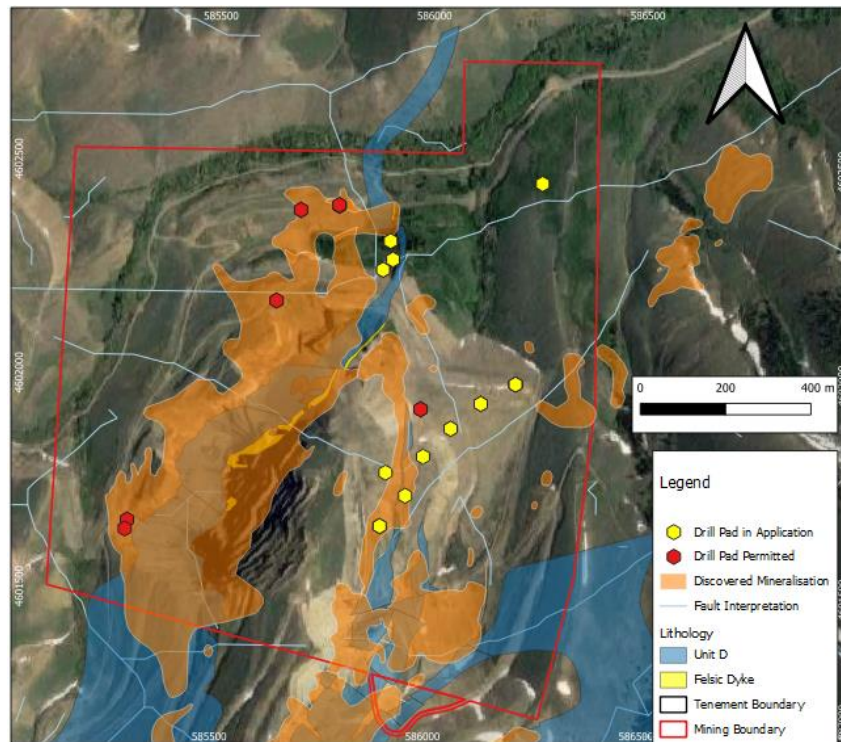


Figure 2: Plan view of drilling program design in 2021

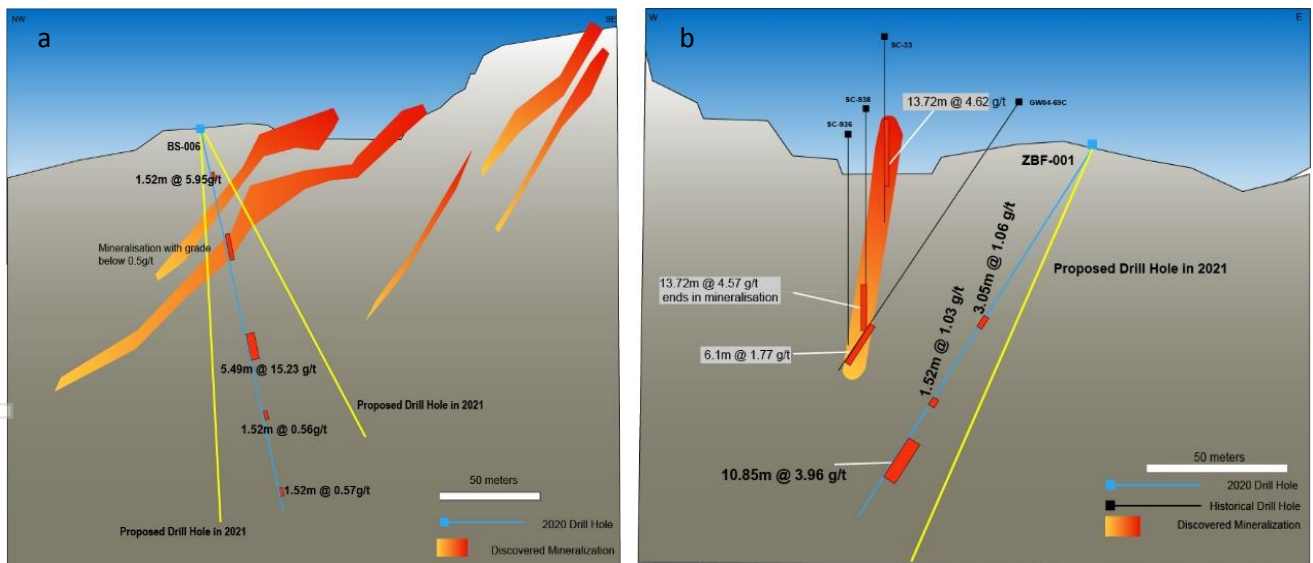


Figure 4: a) Cross Section map showing Proposed drill holes in 2021 and new lode discovery at North Shoot, North Sammy. b) Cross Section map showing Proposed drill holes in 2021 and drill results in 2020 at the 401 deposit, South Sammy

The Company has applied for another drilling permit comprising 26 holes for a total of approximately 6,500 meters to test four highly ranked targets that are located outside of existing mineralisation envelop (Figure 5 and 6). Two targets to be tested are along the Beadles Creek Fault connecting the Beadles Creek and South Sammy deposits. Six drill sections spaced approximately 100 meters apart have been designed to test these targets. Historical drilling returned encouraging results such as 19.8m @ 3.1g/t Au and 10.7m @ 3.4g/t Au (Figure 5). The 2021 drilling program will be the first to test this area in the last 20 years and is targeting a repeat of high grade mineralisation identified at Beadles Creek.

The third target to be tested lies between the Crusher Zone and Briens Fault Zone (Figure 6). The gravity processing indicates a significant structural intersection in the vicinity of the favourable gold host-rock, Unit D, located south of the Crusher Zone. In a similar geological setting, the Crusher Zone is characterized by drill-intervals of 12.19m @ 17.87g/t Au and 10.67m @ 11.93g/t Au. This target has not been tested by drilling.

The forth district target to be tested is eastward from Beadles Creek deposit approximately 400 meters along the W-E structure.

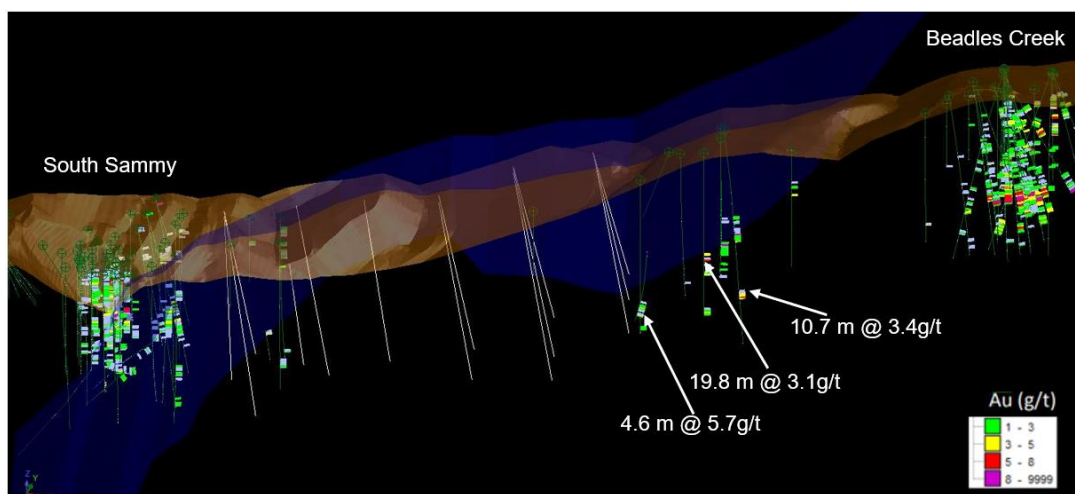


Figure 5: Proposed Drilling program in 2021 to test advanced targets between Beadles Creek and South Sammy

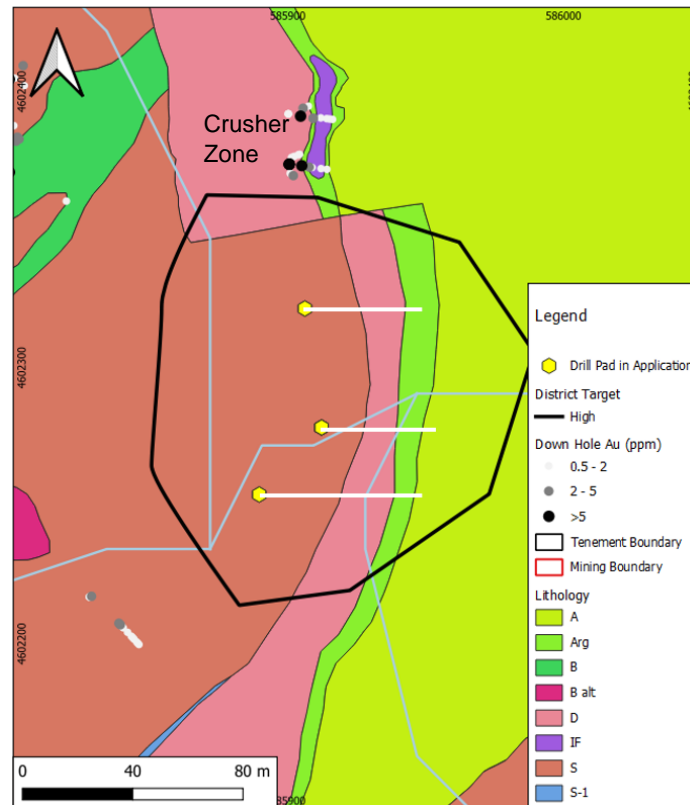


Figure 6: Proposed Drilling program in 2021 to test advanced targets between Briens Fault Zone and Crusher Zone

Soil Sampling and Mapping

Three prospecting areas comprised of a total of fourteen targets identified from the targeting study will be explored in 2021 via systematic soil sampling and geology mapping. The areas are Mac Ridge North, Jack's Creek and Golden Dome for a total of about 20 km² (Figure 7).

Two NNE- striking faults have been identified from the gravity study at Mac Ridge North, which are similar and parallel to gold mineralisation related to the choonover and Beadles Creek faults (Figure 7). Gold mineralisation favourable lithology also occurs at Mac Ridge North. Four targets have been delineated within Mac Ridge North. Gold anomalies have been returned from limited historic soil and rock chip sampling at Jack's Creek (Figure 7). Three targets localised by inferred by structure intersection are identified. Gold mineralisation at the Gold Dome prospect is indicated by results from the 2006 drilling program with an interval of 6.1m @ 2.79g/t Au (Figure 6). Limited soil sampling in the central has delineated anomalies running parallel to structure identified from the gravity study.

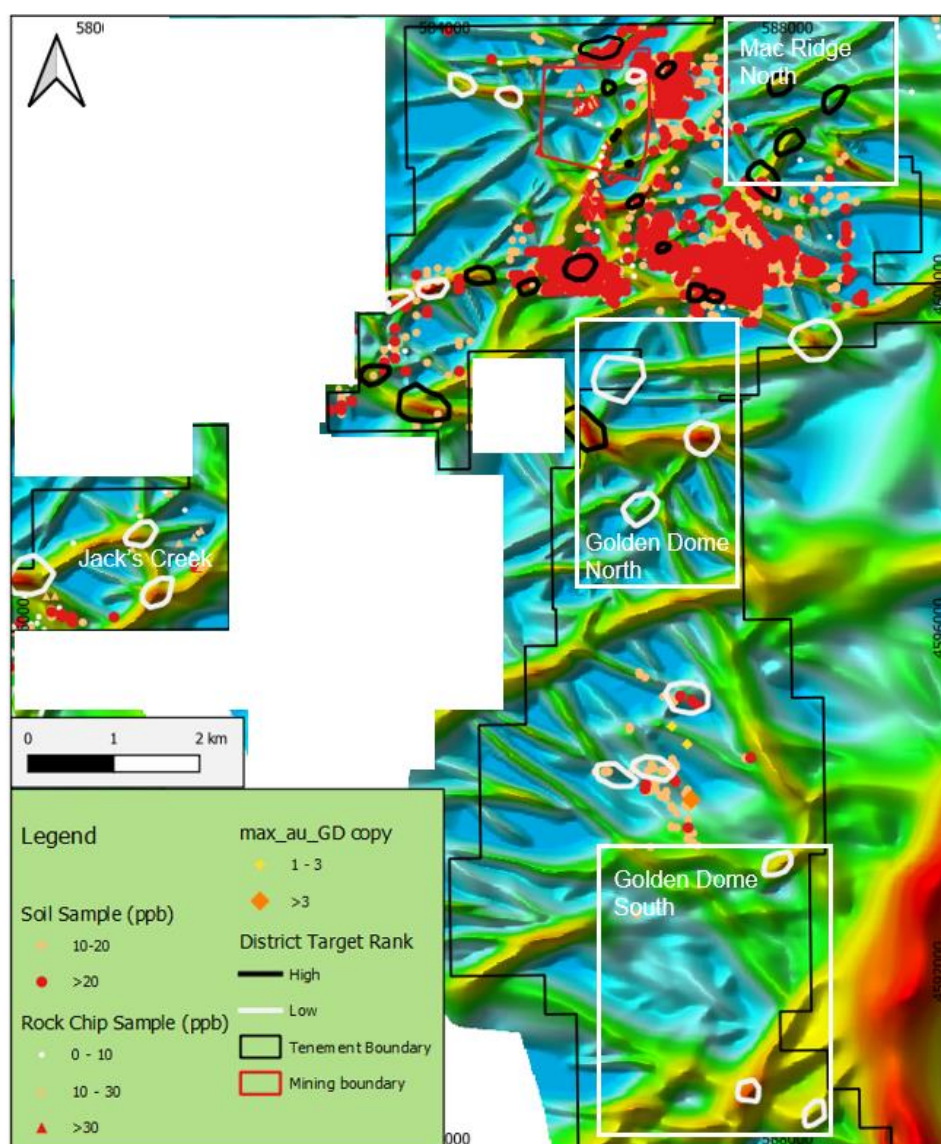


Figure 7: Systematic Soil Sampling and geology mapping has been planned in 2021 for Mac Ridge North, Golden Dome and Jack's Creek.

In-fill Gravity Survey and Induced Polarisation Geophysics Survey

Because of the close spatial relationship between gold mineralisation and large- and small- scale structures (faults), the Company plans to conduct an in-fill gravity survey to enhance the delineation of prospective gold bearing faults and zones of structure intersection in the advanced target areas. An induced Polarisation (IP) is also planned to identify zones of increased sulphide mineral abundance, which may coincide with gold mineralisation in Carlin style deposits. In-fill gravity and IP surveys are planned to advance exploration at the Sammy's area, Dorsey Creek, and Mac Ridge areas (Figure 8), covering 17 identified targets. The in-fill gravity survey will

upgrade the spacing between stations from 200 meters to 50 meters. The areas selected for these enhanced geophysics survey is about 10 km².

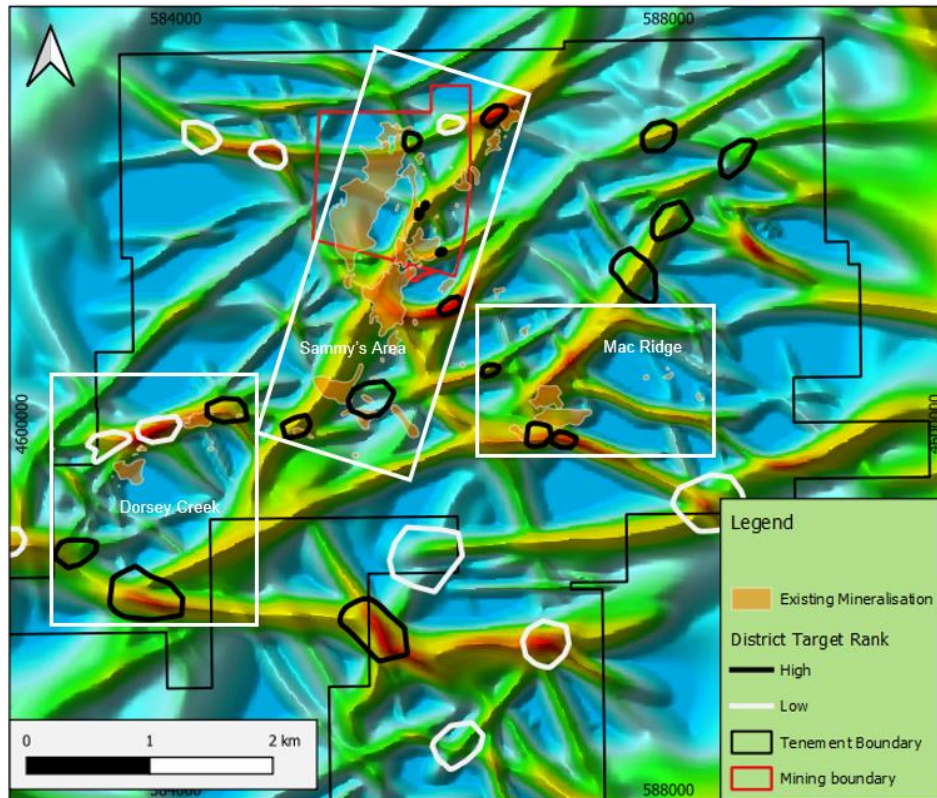


Figure 8: Prospects selected for enhanced geophysics survey.

This announcement has been authorised for release by: Mingyan Wang, Managing Director

CONTACT:

Investors

+61 8 9481 0389

info@anovametals.com.au

Media

Michael Vaughan (Fivemark Partners)

+61 422 602 720

About the Big Springs Gold Project

The Big Springs Gold Project is a Carlin-style gold deposit located 80 km north of Elko in northeast Nevada, USA. Big Springs produced 386,000 ounces of gold between 1987 and 1993, ceasing production due to low gold prices. It is located in proximity to multiple +10 Moz resource Carlin-style gold projects within the region, including the producing Jerritt Canyon Gold Mine which is 20km south of Big Springs (see Figure 3). Big Springs has Measured, Indicated and Inferred Mineral Resources of 16 Mt at 2.0 g/t Au for 1.03 Moz (refer Table 1 and Anova ASX release dated 26 June 2014), over 50 km² of highly prospective ground. The high-grade portion of the Mineral Resources, reported at a cut-off grade of 2.5 g/t gold, contains 3.1 Mt at 4.2 g/t for 415 koz. Big Springs is fully permitted for Stage 1 mining operations.

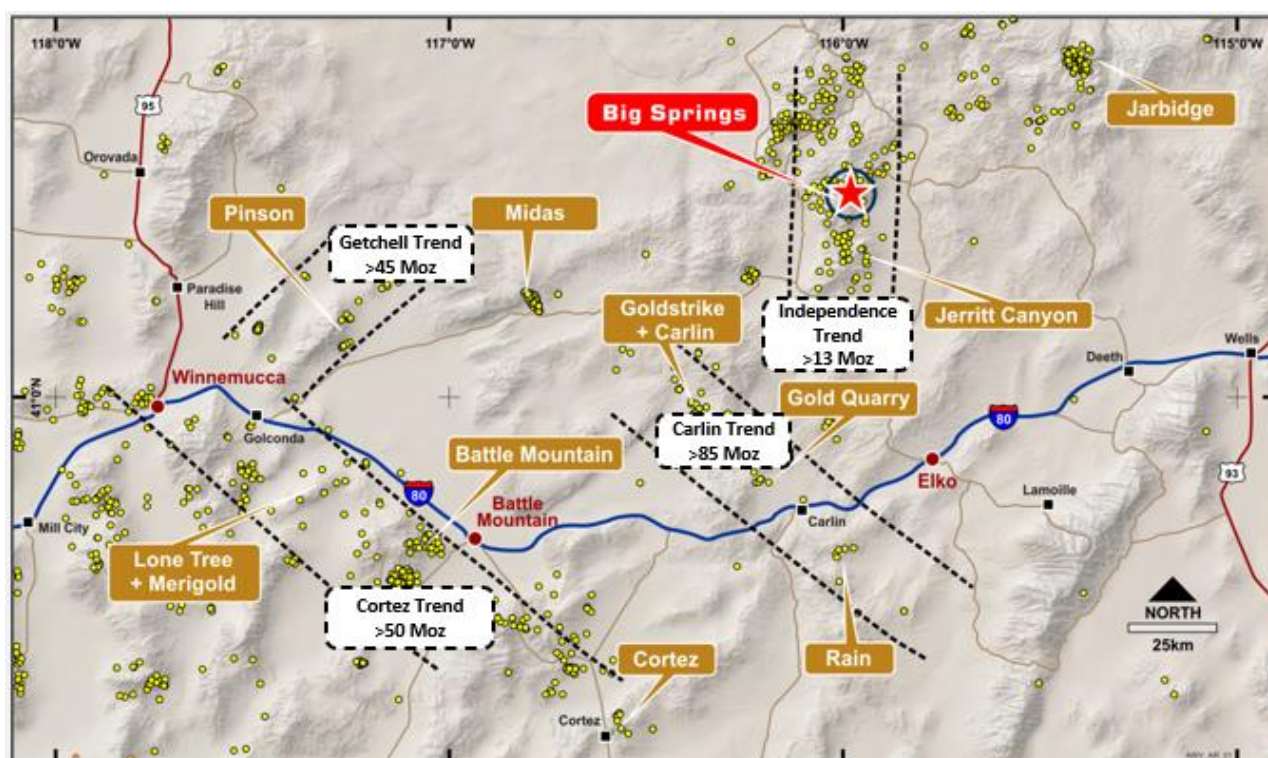


Figure 5: Location of Big Springs Project, Nevada USA

Table 1, Drilling Program Design in 2021

Drillhole	Area	Depth (m)	Easting	Northing	Elevation	Azimuth	Dip
21-BS-001	Crusher, North Sammy	210	585785	4602403	7264	250	-60
21-BS-002	Crusher, North Sammy	330	585785	4602403	7264	119	-65
21-BS-003	Crusher, North Sammy	245	585785	4602403	7264	160	-75
21-BS-004	Crusher, North Sammy	365	585695	4602391	7284	30	-61
21-BS-005	Crusher, North Sammy	240	585695	4602391	7284	45	-55
21-BS-006	Crusher, North Sammy	180	585695	4602391	7284	180	-60
21-BS-007	North, North Sammy	230	585641	4602178	7503	101	-65
21-BS-008	North, North Sammy	345	585641	4602178	7503	261	-85
21-BS-009	SWX, North Sammy	260	585299	4601660	7505	53	-70
21-BS-010	SWX, North Sammy	310	585994	4601939	7495	80	-55
21-BS-011	401, South Sammy	320	585982	4601930	7693	261	-70
21-BS-012	401, South Sammy	310	585982	4601930	7693	285	-65
20_RC_1	Beadles Creek Fault	259	586204.1	4601991	7631.818	139	-43
20_RC_2	Beadles Creek Fault	226	586204.1	4601991	7631.818	139	-52
20_RC_3	Beadles Creek Fault	265	586204.1	4601991	7631.818	139	-58
20_RC_4	Beadles Creek Fault	238	586123.5	4601944	7671.752	139	-45
20_RC_5	Beadles Creek Fault	235	586123.5	4601944	7671.752	139	-55
20_RC_6	Beadles Creek Fault	262	586123.5	4601944	7671.752	139	-61
20_RC_7	Beadles Creek Fault	250	586053.8	4601885	7683.119	139	-52
20_RC_8	Beadles Creek Fault	241	586053.8	4601885	7683.119	139	-60
20_RC_9	Beadles Creek Fault	250	585990.1	4601818	7804.172	139	-65
20_RC_10	Beadles Creek Fault	259	585949.6	4601726	7821.658	139	-59
20_RC_11	Beadles Creek Fault	259	585902.8	4601780	7930.797	139	-69
20_RC_12	Beadles Creek Fault	244	585891.1	4601654	7911.135	139	-55
20_RC_13	Beadles Creek Fault	247	585891.1	4601654	7911.135	139	-66
20_RC_14	Beadles Creek Fault	262	585891.1	4601654	7911.135	139	-85
20_RC_15	Crusher Zone South	229	585912.3	4602278	7394.201	94	-50
20_RC_16	Crusher Zone South	226	585912.3	4602278	7394.201	94	-66
20_RC_17	Crusher Zone South	229	585889.7	4602254	7400	94	-50
20_RC_18	Crusher Zone South	247	585889.7	4602254	7400	94	-66
20_RC_19	Crusher Zone South	244	585906.2	4602321	7320	94	-50
20_RC_20	Crusher Zone South	250	585906.2	4602321	7320	94	-66
20_RC_21	Crusher Zone South	232	585912.3	4602278	7394.201	50	-59
20_RC_22	Crusher Zone South	229	585912.3	4602278	7394.201	130	-59
20_RC_23	Beadles Creek West	232	586260.2	4602461	7284.386	94	-50
20_RC_24	Beadles Creek West	247	586260.2	4602461	7284.386	94	-63
20_RC_25	Beadles Creek West	229	586260.2	4602461	7284.386	50	-56
20_RC_26	Beadles Creek West	244	586260.2	4602461	7284.386	130	-56

Note: Permit has received for the top 12 drill holes.

Table 2: Mineral Resources

Project	Measured			Indicated			Inferred			Combined		
	kT	Grade	Koz	kT	Grade	Koz	kT	Grade	Koz	kT	Grade	Koz
Big Springs (JORC 2012)												
North Sammy	346	7.0	77.9	615	3.1	62.2	498	2.8	44.1	1,458	3.9	184.1
North Sammy Contact				443	2.3	32.4	864	1.4	39.3	1,307	1.7	71.8
South Sammy	295	4.0	38.2	3,586	2.1	239.9	3,721	1.3	159	7,602	1.8	437.2
Beadles Creek				119	2.2	8.2	2,583	2.3	193.5	2,702	2.3	201.7
Mac Ridge							1,887	1.3	81.1	1,887	1.3	81.1
Dorsey Creek							278	1.4	12.9	278	1.4	12.9
Briens Fault							799	1.6	40.5	799	1.6	40.5
Big Springs Sub-Total	641	5.6	116.1	4,762	2.2	343.3	10,630	1.7	570.4	16,032	2.0	1,029.9

Note: Appropriate rounding applied

1. The information in this announcement that relates to the mineral resources for the Company's Big Springs Project was first reported by the Company in its resource announcement ("Resource Announcement") dated 26 June 2014. The Company confirms that it is not aware of any new information or data that materially affects the information included in the Resource Announcement, and in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the Resource Announcement continue to apply and have not materially changed.

Consultant Profile

Dr Steve Garwin has over 30 years of experience as an exploration geologist and is one of the leading authorities on Carlin-style, porphyry, and epithermal mineralization. Dr. Garwin applies methods of structural geology and geochemistry towards gold and copper exploration. He previously worked with Newmont Mining Corporation as Chief Geologist of Mines and Exploration in Nevada. He has been involved with several exploration and mining projects including mines of the Carlin Trend and Battle Mountain district in Nevada; the Batu Hijau copper-gold porphyry deposit, the Indo Muro, Way Linggo and Tembang epithermal gold-silver vein systems, and the Mesel sediment-hosted gold deposit in Indonesia; the Whistler gold-copper porphyry deposit in Alaska; and the Santa Barbara gold-porphyry deposit in south-eastern Ecuador. Steve's guidance has been instrumental in the discovery and resource definition of the Tier-One Alpala Cu-Au-Ag porphyry deposit in northern Ecuador.

Competent Person Statement

The information in this report that relates to geophysics data processing for the Big Springs Project is based on information provided by Dr. Amanda Buckingham, Principal Geophysicist – Fathom Geophysics and consultant to Anova. Dr. Amanda Buckingham is a member of the Australasian Institute of Mining and Metallurgy, and has sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration, and to the activities undertaken to qualify as Competent Persons as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Dr. Amanda Buckingham consents to the inclusion in this report of the matters based on her information in the form and context in which they appear.

The information in this report that relates to Exploration Result for the Big Springs Project is based on information compiled by Dr. Geoffrey Xue. Dr. Xue is a full time employee of Anova and a member of the Australasian Institute of Mining and Metallurgy and has sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration, and to the activities undertaken to qualify as Competent Persons as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Dr. Xue consents to the inclusion in this report of the matters based on his information in the form and context in which they appear.

The information in this report that relates to Mineral Resources for the Big Springs Project is based on information compiled by Mr Lauritz Barnes, Principal Consultant Geologist – Trepanier Pty Ltd. Mr Barnes is a shareholder of Anova. Mr Barnes is a member of the Australian Institute of Geoscientists and has sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration, and to the activities undertaken to qualify as Competent Persons as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Barnes consents to the inclusion in this report of the matters based on his information in the form and context in which they appear.

Appendix 1: JORC Code, 2012 Edition – Supporting tables.

The following section is provided to ensure compliance with the JORC (2012) requirements for the reporting of exploration results for the Big Springs gold deposit in Nevada.

Section 1: Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	<ul style="list-style-type: none"> 10 diamond drill holes were completed for this program to test mineralisation extension at both North and South Sammy diamond core samples have been half cut with automatic core saw about 1-1.5 meter samples are collected from the core trays as marked out by the supervising geologist Reflex multishot camera survey is used for downhole dip measurement. Core is continuously cut on the same side of the orientation line and the same side is sampled to ensure the sample is representative and no bias is introduced. Determination of mineralisation has been based on geological logging. Samples will be sent to lab for Au and other multi elements analysis. Diamond Core drilling was used to obtain 3-6m length samples from the barrel which are then marked in one meter intervals based on the drillers core block measurement. Assay samples are selected based on geological logging boundaries or on the nominal meter marks. Collect samples weigh a nominal 2-3 kg (depending on sample recovery) was sent to lab and pulverised. Samples have been dispatched to ALS Global in Reno, NV for analysis Fire assay will be used for Au analysis and aqua regia/ICP MS will be used for multi element analysis.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	<ul style="list-style-type: none"> Drilling was undertaken using HQ sized drill core. Hole was collar with mud rotary from surface.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	<ul style="list-style-type: none"> Core recovery was recorded by the drill crew and verified by the geologist. RQD measurements were recorded to ensure recovery details were captured.
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	

Criteria	JORC Code explanation	Commentary
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	<ul style="list-style-type: none"> Sample recovery in both holes was high.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	<ul style="list-style-type: none"> Detailed industry standard of collecting core in core trays, marking meter intervals & drawing core orientation lines was undertaken
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	<ul style="list-style-type: none"> Core trays were photographed wet and dry prior to sampling.
	The total length and percentage of the relevant intersections logged.	<ul style="list-style-type: none"> Drill hole logs are recorded in Excel spread sheets and validated in Micromine Software as the drilling progressed. The entire length of both holes was logged.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique.	<ul style="list-style-type: none"> Core is half cut using an automatic core saw to achieve a nominal 2-3kg split sample for laboratory submission The sample preparation technique is considered industry best standard practice No field duplicates have been collected in this program. Sample sizes are appropriate to the grain size of the mineralisation.
Quality of assay data and laboratory tests	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	<ul style="list-style-type: none"> Field QC procedures has involved the use of certified reference material assay standards and blanks, as well as assay duplicates The sample sizes are considered appropriate for the style of mineralisation, which is fine grained disseminated gold with minimal nugget effect. The ALS lab in Reno, NV will be used for Au and multi elements analysis (including 51 elements). Fire assay used for Au analysis and aqua regia for multi elements. Industry standard QAQC procedures were applied by ALS lab.
	Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.	
	Whether sample sizes are appropriate to the grain size of the material being sampled.	
	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	
	Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes.	<ul style="list-style-type: none"> Results verified by Company geologist The data was collected and logged using Excel spreadsheets. The data will be

Criteria	JORC Code explanation	Commentary
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.	loaded into an externally hosted and managed database and loaded by an independent consultant, before being validated and checked. <ul style="list-style-type: none"> No adjustments have been made to the assay data other than length weighted averaging.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.	<ul style="list-style-type: none"> The holes were pegged by the Company contract geologist on site using a sub meter GPS The rig was setup over the nominated hole position and final GPS pickup occurred at the completion of the hole. UTM Zone 11 using NAD83 datum.
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	<ul style="list-style-type: none"> The nominal drillhole spacing is approximately 50ft by 50ft (15m), is down to 40ft by 40ft in the Measured resource zones at 601 - and increases in places. Correspondingly, as the drillhole spacing increases and confidence in geological and mineralisation continuity decreases, the resource classification changes from Measured to Indicated to Inferred. Gateway and Anova holes have been drilled as infill to these grids as confirmation of mineralisation. The 2020 drilling program is designed as infill and resource extension. Drill hole spacing is varied from 30 meters to 15 meters. The mineralised domains have demonstrated sufficient continuity in both geological and grade to support the definition of Mineral Resource and Reserves, and the classification applied under the 2012 JORC code. No sample compositing is applied.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	<ul style="list-style-type: none"> Azimuth for the proposed drill hole in 2020 varies in a wide range. Dip angle is in the range of 50 – 90 degree. The orientation of the mineralisation is variable. The drill holes were planned to intersect mineralised zones as close to perpendicular as possible. The orientations of mineralised zones were determined from previous angled drilling and no bias has been identified.
Sample security	The measures taken to ensure sample security.	<ul style="list-style-type: none"> All data will be digitally stored by the Contractor and relayed to Anova.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	<ul style="list-style-type: none"> All information were initially processed and interpreted by a qualified person.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites	<ul style="list-style-type: none"> The Big Springs project tenements, comprising a total of 710 unpatented Lode Mining Claims (14,149 acres or 5,726 ha) are all owned by Anova. Claims are subject to a Net Smelter Return ranging from zero 3% payable to various parties. There are no known adverse surface rights.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	<ul style="list-style-type: none"> There are no known impediments. All liabilities with respect to the decommissioning of the open pit mines are the responsibility of AngloGold Ashanti N.A Inc.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"> Not Applicable
Geology	Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none"> The Project's disseminated, sediment-hosted gold deposits have been classified by several authors as typical Carlin-type deposits. The Big Springs deposits are hosted predominantly within the flaser bedded siltstone of the Overlap Assemblage, which is Mississippian to Permian in age (30Ma to 360Ma), with structure and host stratigraphy being the primary controls on gold mineralisation. Mineralisation at North Sammy is typically hosted within black, highly carbonaceous siltstone and calcareous sandy siltstone. These units are generally located between the Argillic thrust of the footwall and the Schoonover thrust in the hangingwall. Individual high-grade ore shoots at North Sammy generally plunge moderately to the NNW and are controlled by intersections of E-W-striking faults with the NE-SW-striking Argillic thrust. The South Sammy Creek deposit is more complex with a series of controlling structures, in particular the Briens fault along the western margin. On the eastern side of the Briens fault, the thick, tabular South Sammy ore deposit forms a largely continuous zone that is semi-concordant with the permeable and brittle host rocks of the Overlap Assemblage. The Mac Ridge East Prospect is believed to be located in the Hanson Creek formation – the main host to gold mineralization at Jerritt Canyon.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the	<ul style="list-style-type: none"> Drilling program in 2020 have been designed to test the resource extension at North Sammy and South Sammy, and also

Criteria	JORC Code explanation	Commentary
	following information for all Material drill holes, including easting and northing of the drill hole collar, elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar, dip and azimuth of the hole, down hole length and interception depth plus hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	to test new targets, particularly for deep ore lodges. Relevant information can be found in Table 1 in the announcement.
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	<ul style="list-style-type: none"> • All reported assays have been length weighted if appropriate. No top cuts have been applied. A nominal 1.0 ppm Au lower cut off has been applied, with only intersections >1.0 g/t considered significant. • No metal equivalent values are used.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	<ul style="list-style-type: none"> • Modelled ore zones have been intersected in multiple orientations by the different generations and types of drilling (e.g. RC vs. diamond core) and as such, there is high confidence in both the geological and mineralised zone. •
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	<ul style="list-style-type: none"> • See figures and maps provided in the text of the announcement.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	<ul style="list-style-type: none"> • The CP believes this report to be a balanced representation of exploration undertaken.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and	<ul style="list-style-type: none"> • All meaningful & material exploration data has been reported.

Criteria	JORC Code explanation	Commentary
	method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	<ul style="list-style-type: none"> Further work planned includes comprehensive data interpretation, field mapping, and exploration drilling.