


**POSITIVE DRILLING RESULTS CONTINUE AT WYOMING ISR URANIUM PROJECT**

**Highlights:**

- 24 holes completed to date of ~100-hole maiden drill program
- 10 of 24 holes (42%) drilled to date met or exceeded the Grade Thickness (GT) cutoff with an average of 0.68GT
- Encouraging results continue with over 40% of holes drilled recording better than the minimum economic Grade Thickness (GT) cutoff of 0.2GT<sup>1</sup>
- Mineralisation continues to demonstrate characteristics conducive to ISR recovery
- 1st phase of drilling to conclude December 17<sup>th</sup> with balance of holes planned for early 2022

GTI Resources Ltd (GTI or Company) is pleased to advise that 2 mud rotary drill rigs have now completed 24 holes of its 50,000-foot (~15,000 metre) ~100-hole maiden drill program within exploration area 1 (Exp area 1) at the Thor ISR uranium project in Wyoming's Great Divide basin (Figure 1).

**Figure 1. Thor Project Uranium Drilling Location Map, Great Divide Basin, Wyoming USA.**

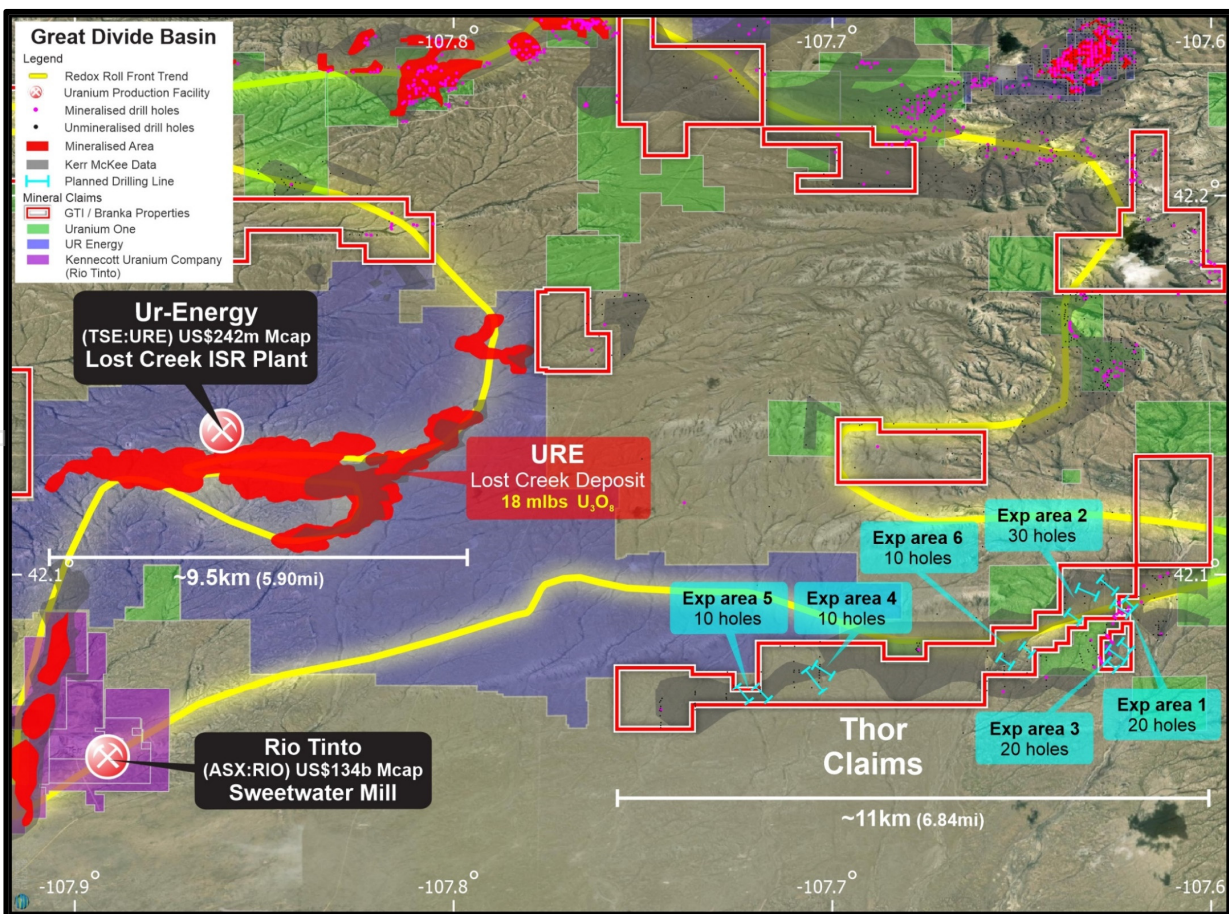

<sup>1</sup> Typical economically viable ISR grade & GT cut-offs are: 0.02% (200ppm) U<sub>3</sub>O<sub>8</sub> & 0.2GT i.e., 10 ft (3m) @ 0.02% (200ppm) U<sub>3</sub>O<sub>8</sub>

**Figure 2. Mud Rotary Drill Rigs, Ancillary Equipment and Support Vehicles at the Thor Project.**



The first 24 drill holes at the Thor Project were completed for a total of 12,041 feet (3,670 metres) within Area 1 (**Figures 1 & 3**). Typical economically viable ISR grade and GT cut-offs are: 0.02% (200ppm)  $U_3O_8$  and 0.2GT -- i.e., 10 ft (3m) @ 0.02% (200ppm)  $U_3O_8$ . Results from the first 24 holes (including those previously reported) were characterised by (**Table 1**):

- 10 of 24 holes (42%) drilled to date met both grade and GT cutoff with an average of 0.68GT; and
- Of the remaining 14 holes 2 met grade cutoff but not GT, 6 had trace mineralisation & 6 were barren.

These results are in line with expectation and are viewed by the Company as indicative of high potential for economic ISR uranium mineralisation.

Drilling is now completed in the initial drilling area to the northeast (Area 1 in **Figure 3**) and has moved to the southeast claim group (Area 2 in **Figure 3**). Drilling along the eastern portion of the claim block has shown a consistent sand at ~200 feet that is 110-120' thick within which there are three or more fronts.

These results continue to be very encouraging, and the mineralisation encountered meets expectations for economic ISR uranium recovery. Drilling to date has confirmed that the historic data is an excellent guide for drilling<sup>2</sup>. Drilling has also continued to show that the geological and hydrogeological setting of the mineralisation appears to be conducive to ISR recovery with the main host sand appearing to be continuous in the area and the water table being over 100 feet above the main host sand.

Drilling continues to show that there are at least 3 separate roll fronts present in the main host sand with additional sands positioned above and below the main sand unit showing at least trace mineralisation.

GTI's exploration objective for this drill program is to identify REDOX boundaries and potential host sands in addition to defining the depth, thickness, grade and width of mineralisation across the REDOX front. The Company is targeting mineralisation 50 feet (15 metres) or more below the water table. The drill program may ultimately enable estimation of inferred mineral resources and/or an exploration target.

---

<sup>2</sup> It should be noted that the drilling commenced in one of the areas with better historic data and that the positive drilling success rate may not be replicated as the Company proceeds into other areas with less comprehensive historical data.

**Table 1. Thor Drilling Preliminary Results**

| As of 12/12/2021   |              |                     |                    |       |       |           |                                       |      |        |            |      |
|--|--------------|---------------------|--------------------|-------|-------|-----------|---------------------------------------|------|--------|------------|------|
| Thor Drilling Project Great Divide Basin Preliminary Results |              |                     |                    |       |       |           |                                       |      |        |            |      |
| Reported at 0.02 %eU3O8 Cutoff (200 ppm)                     |              |                     |                    |       |       |           |                                       |      |        |            |      |
| Hole ID  | Date Drilled | Total Depth Drilled | Total Depth Logged | From  | To    | Thickness | Grade %eU <sub>3</sub> O <sub>8</sub> | GT   | Zone   | Total Hole | GT   |
| BR-1001  | 11/30/2021   | 503                 | 503                | 246.5 | 255.5 | 9         | 0.033                                 | 0.30 | Upper  | 0.55       |      |
|  |              |                     |                    | 276.5 | 284   | 7.5       | 0.034                                 | 0.26 | Middle |            |      |
| BR-1002  | 11/29/2021   | 503                 | 503                | 217   | 240.5 | 23.5      | 0.063                                 | 1.48 | Upper  | 1.74       |      |
|  |              |                     |                    | 257.5 | 261   | 3.5       | 0.074                                 | 0.26 | Middle |            |      |
| BR - 1003  | 11/30/2021   | 503                 | 502                | 223   | 233   | 10        | 0.037                                 | 0.37 | Upper  | 0.37       |      |
|  |              |                     |                    | 295   | 310   | 15        | Trace                                 |      | Lower  |            |      |
| BR - 1004  | 12/1/2021    | 503                 | 502                | 195   | 196   | 1         | 0.024                                 | 0.02 | Upper  | 0.09       |      |
|  |              |                     |                    | 202   | 205   | 3         | 0.022                                 | 0.07 | Upper  |            |      |
|  |              |                     |                    | 239.5 | 240   | 0.05      | 0.022                                 | 0.00 | Middle |            |      |
|  |              |                     |                    | 256   | 261.5 | 5.5       | 0.01                                  |      | Middle |            |      |
|  |              |                     |                    | 300   | 301   |           | Trace                                 |      | Lower  |            |      |
| BR-1005  | 12/1/2021    | 503                 | 500                | 210.5 | 238   | 27.5      | 0.044                                 | 1.21 | Upper  | 1.92       |      |
|  |              |                     |                    | 255.5 | 269.5 | 14        | 0.051                                 | 0.71 | Middle |            |      |
|  |              |                     |                    | 304.5 | 305.5 | 1         | 0.021                                 | 0.02 | Lower  |            |      |
| BR-1006  | 12/2/2021    | 503                 | 502                | 184.5 | 188   | 4.5       | 0.01                                  |      |        | 0.36       |      |
|  |              |                     |                    | 244   | 246   | 2         | 0.031                                 | 0.06 | Middle |            |      |
|  |              |                     |                    | 258.5 | 265   | 6.5       | 0.046                                 | 0.30 | Middle |            |      |
|  |              |                     |                    | 279.5 | 294   | 14.5      | 0.017                                 | 0.25 | Lower  |            |      |
| BR-1007  | 12/2/2021    | 503                 | 502                | 187.5 | 190.5 | 3         | 0.01                                  |      |        | 0.18       |      |
|  |              |                     |                    | 255.5 | 261   | 5.5       | 0.01                                  |      | Middle |            |      |
|  |              |                     |                    | 278   | 284.5 | 6.5       | 0.028                                 | 0.18 | Middle |            |      |
|  |              |                     |                    | 456   | 457   |           | 0.01                                  |      |        |            |      |
| BR-1008  | 12/2/2021    | 503                 | 502                | 226   | 228   | 2         | 0.01                                  |      | Upper  | 0.07       |      |
|  |              |                     |                    | 282   | 286   | 4         | 0.018                                 | 0.07 | Middle |            |      |
| BR-1009  | 12/3/2021    | 503                 | 501                | 229.5 | 231.5 | 2         | Trace                                 |      |        |            |      |
|  |              |                     |                    | 339.5 | 341   | 1.5       | Trace                                 |      |        |            |      |
| BR-1010  | 12/6/2021    | 500                 | 500                |       |       |           | Barren                                |      |        |            |      |
| BR-1011  | 12/6/2021    | 500                 | 500                | 414   | 416   | 2         | Trace                                 |      |        |            |      |
|  |              |                     |                    | 430   | 435   | 5         | Trace                                 |      |        |            |      |
| BR-1012  | 12/7/2021    | 503                 | 502                | 318   | 319   | 1         | Trace                                 |      |        |            |      |
|  |              |                     |                    | 432   | 434   | 2         | 0.012                                 | 0.02 |        |            |      |
| BR-1013  | 12/3/2021    | 503                 | 502                |       |       |           | Barren                                |      |        |            |      |
| BR-1014  | 12/6/2021    | 500                 | 500                |       |       |           | Barren                                |      |        |            |      |
|  |              |                     |                    |       |       |           |                                       | 0.00 |        |            |      |
| BR-1015  | 12/7/2021    | 503                 | 502                | 309.5 | 314.5 | 5         | 0.013                                 | 0.07 |        |            |      |
|  |              |                     |                    | 339.5 | 341   | 1.5       | 0.012                                 | 0.02 |        |            |      |
|  |              |                     |                    | 350.5 | 352   | 1.5       | 0.011                                 | 0.02 |        |            |      |
| BR-1016  | 12/9/2021    | 500                 | 500                |       |       |           | Barren                                |      |        |            |      |
| BR-1017  | 12/9/2021    | 500                 | 500                |       |       |           | Barren                                |      |        |            |      |
|  |              |                     |                    |       |       |           |                                       | 0.00 |        |            |      |
| BR-1018  | 12/9/2021    | 500                 | 500                |       |       |           | Barren                                |      |        |            |      |
| BR-1019  | 12/9/2021    | 500                 | 500                | 305   | 325   | 20        | Trace                                 |      |        |            |      |
|  |              |                     |                    |       |       |           |                                       | 0.00 |        |            |      |
| BR-1020  | 12/7/2021    | 500                 | 500                | 187   | 189   | 2         | 0.012                                 | 0.02 |        |            |      |
|  |              |                     |                    | 219.5 | 220.5 | 1         | 0.01                                  | 0.01 |        |            |      |
|  |              |                     |                    | 256.5 | 266   | 9.5       | 0.039                                 | 0.37 | middle |            |      |
| BR-1021  | 12/9/2021    | 503                 | 502                | 139.5 | 144   | 4.5       | 0.025                                 | 0.11 |        | 0.48       |      |
|  |              |                     |                    | 148.5 | 161   | 12.5      | 0.029                                 | 0.36 |        |            |      |
| BR-1022  | 12/10/2021   | 502                 | 502                | 133.5 | 150   | 16.5      | 0.018                                 | 0.30 |        | 0.50       |      |
|  |              |                     |                    | 159   | 170   | 11        | 0.018                                 | 0.20 |        |            |      |
| BR-1023  | 12/10/2021   | 500                 | 500                | 145   | 150   | 5         | 0.021                                 | 0.11 |        | 0.32       |      |
|  |              |                     |                    | 166.5 | 172   | 5.5       | 0.02                                  | 0.11 |        |            |      |
|  |              |                     |                    | 177   | 183   | 6         | 0.018                                 | 0.11 |        |            |      |
| BR-1024  | 12/9/2021    | 500                 | 500                | 353   | 362   | 9         | 0.023                                 | 0.21 |        |            | 0.21 |

GTI hopes to encounter mineralisation of similar tenor to that encountered at the nearby Lost Creek deposit and that otherwise meets typical economic cutoff criteria for sandstone hosted ISR uranium projects in Wyoming's Great Divide Basin e.g.:


- Grade greater than 0.02% (200 ppm) U<sub>3</sub>O<sub>8</sub>
- Grade x Thickness (GT) greater than 0.2 (10 ft @ 0.02 - 3 metres @ 200ppm U<sub>3</sub>O<sub>8</sub>)
- Width of mineralisation above cutoff nominal 50 feet (15 metres) and nominal GT of 0.4

UR Energy's Lost Creek ISR uranium deposit (**Figure 1**) is reported to contain a remaining 13Mlbs of U<sub>3</sub>O<sub>8</sub> at average grade of 0.048% eU<sub>3</sub>O<sub>8</sub> (Measured and Indicated) at a cutoff Grade Thickness (GT) of 0.2.<sup>3</sup>

<sup>3</sup> <https://www.ur-energy.com/news-media/press-releases/detail/169/ur-energy-issues-amended-preliminary-economic-assessment>

Figure 3. Thor Project Uranium Drilling Location Map, Great Divide Basin, Wyoming USA.

For personal use only

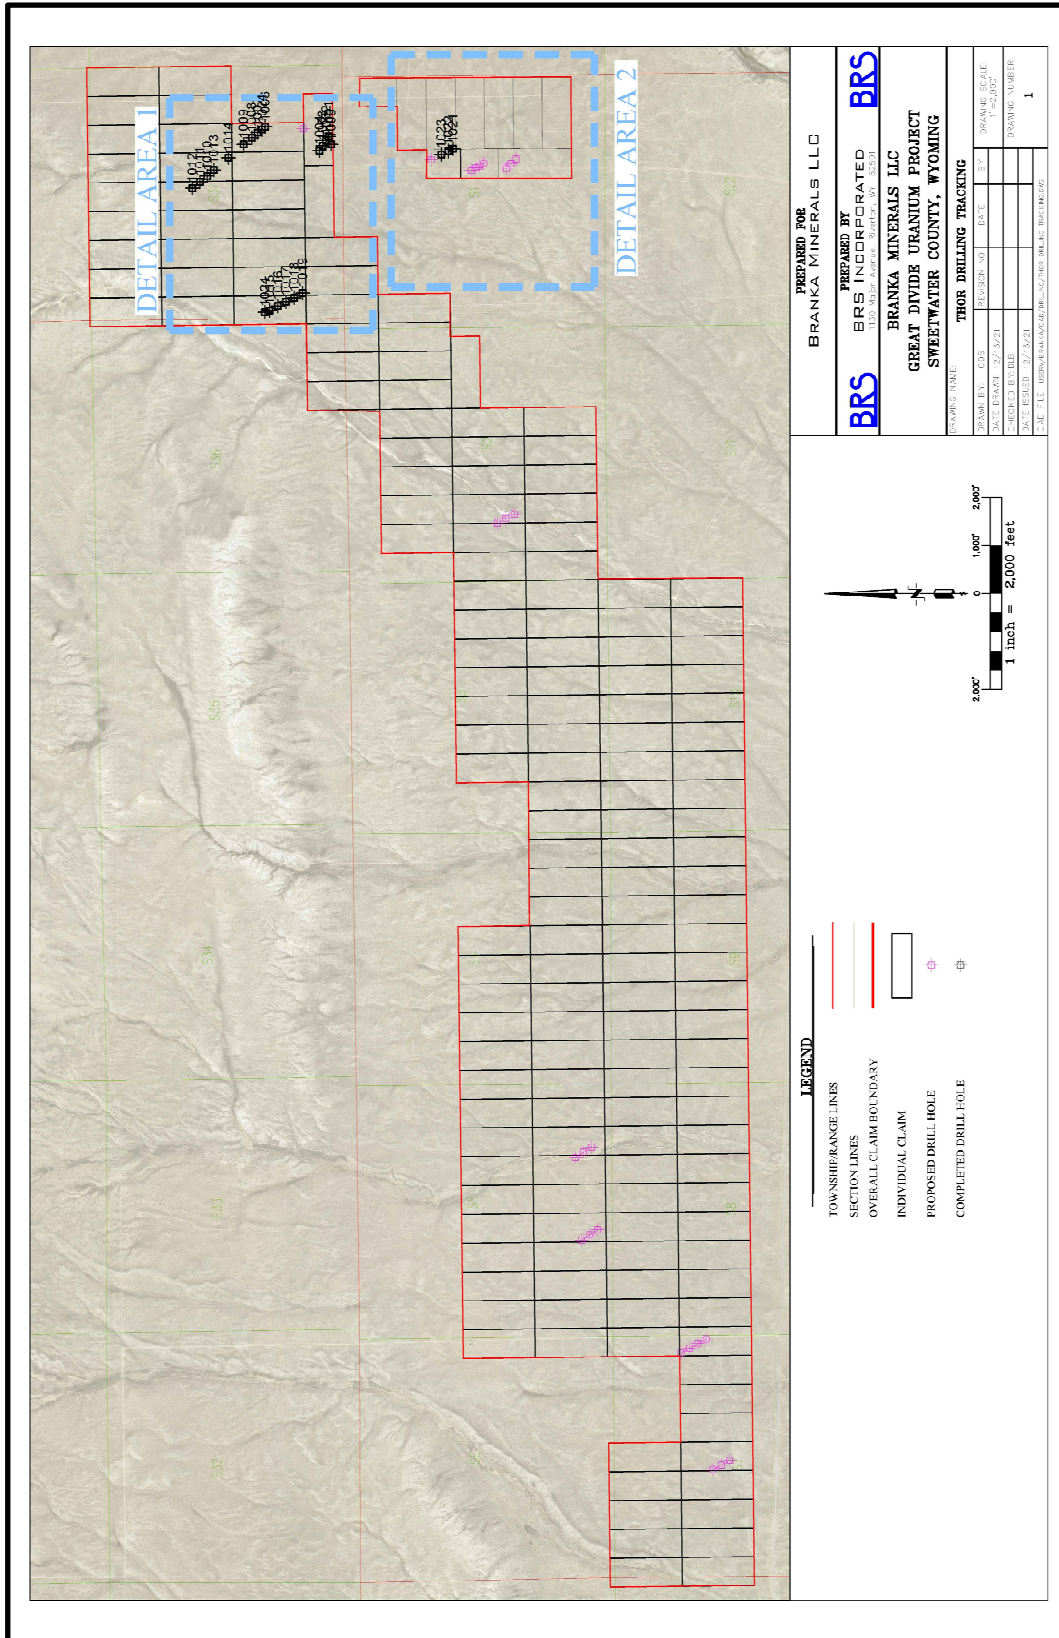

The 1<sup>st</sup> phase of the drilling program is expected to be completed on December 17<sup>th</sup> for the Christmas break with the balance of the program planned to take place during early 2022 as conditions permit. Further drilling results are expected to be available in the week before Christmas. Final results, conclusions and recommendations for next steps will be developed at end of drill program during 2022.

-Ends-

This ASX release was authorised for release by the Directors of GTI Resources Ltd. Bruce Lane, (Executive Director), **GTI Resources Ltd**

**Table 2. Drill Collar Information (Including Previously Reported)**

| Hole ID | Coordinates (easting, northing) | Elevation (ft) |
|---------|---------------------------------|----------------|
| BR-1001 | 107.6251015547,42.0890548662    | 6873.86        |
| BR-1002 | 107.6254199081,42.0892066907    | 6888.63        |
| BR-1003 | 107.6258066366,42.0894079077    | 6884.09        |
| BR-1004 | 107.6261828799,42.0895925592    | 6886.52        |
| BR-1005 | 107.6257158977,42.088921223     | 6883.69        |
| BR-1006 | 107.6242940705,42.0926740981    | 6897.49        |
| BR-1007 | 107.6247348601,42.0931038252    | 6891.21        |
| BR-1008 | 107.6251282725,42.0934402246    | 6903           |
| BR-1009 | 107.6256337815,42.0939136711    | 6906           |
| BR-1010 | 107.6280267692,42.0960116756    | 6904.88        |
| BR-1011 | 107.628460662,42.0964353442     | 6900.63        |
| BR-1012 | 107.6289477636,42.096869593     | 6903.61        |
| BR-1013 | 107.6275635919,42.0956299147    | 6910           |
| BR-1014 | 107.6266336868,42.0947884841    | 6900.39        |
| BR-1015 | 107.6384091935,42.0925488176    | 6877.43        |
| BR-1016 | 107.6380727834,42.0920768141    | 6886.93        |
| BR-1017 | 107.6377577502,42.0916160627    | 6883.4         |
| BR-1018 | 107.6377577502,42.0916160627    | 6883.4         |
| BR-1019 | 107.6371122922,42.0906534466    | 6884.2         |
| BR-1020 | 107.6244934496,42.0928435666    | 6894.72        |
| BR-1021 | 107.6261682996,42.0819693297    | 6858.92        |
| BR-1022 | 107.6263389272,42.0822372169    | 6857.62        |
| BR-1023 | 107.6261682996,42.0819693297    | 6859.22        |
| BR-1024 | 107.63854722,42.09281944        | 6877.43        |

Note: All holes were drilled vertically


### Competent Persons Statement

The information in this announcement that relates to the Exploration Results is based on information compiled and fairly represents the exploration status of the project. Doug Beahm has reviewed the information and has approved the scientific and technical matters of this disclosure. Mr. Beahm is a Principal Engineer with BRS Engineering Inc. with over 45 years of experience in mineral exploration and project evaluation. Mr. Beahm is a Registered Member of the Society of Mining, Metallurgy and Exploration, and is a Professional Engineer (Wyoming, Utah, and Oregon) and a Professional Geologist (Wyoming). Mr Beahm has worked in uranium exploration, mining, and mine land reclamation in the Western US since 1975 and has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and has reviewed the activity which has been undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of exploration results, Mineral Resources and Ore Reserves. Mr Beahm provides his consent to the information provided.

# GTI RESOURCES LTD – SUMMARY OF PROJECTS


## GREAT DIVIDE BASIN ISR URANIUM, WYOMING, USA

GTI resources has acquired 100% of ~22,000 acres (~8,900 hectares) across several groups of strategically located and underexplored mineral lode claims (**Claims**) and 2 state leases (**Leases**), prospective for sandstone hosted uranium. The properties are located in the Great Divide Basin (**GDB**), Wyoming, USA & the Uravan Belt, Colorado, USA (the **Properties**). The Wyoming Properties, being GTI's priority for exploration, are located in proximity to UR Energy's (**URE**) Lost Creek ISR Facility & Rio Tinto's (**RIO**) Sweetwater/Kennecott Mill and the GDB roll front REDOX boundary.

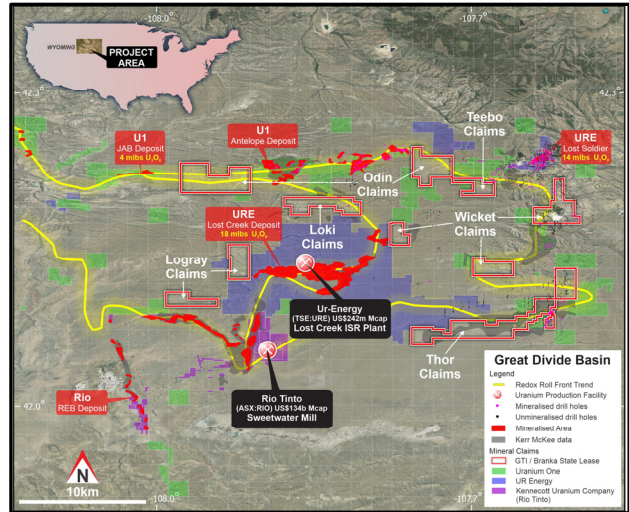


## HENRY MOUNTAINS URANIUM/VANADIUM, UTAH, USA

The Company has ~1,500 hectares of land holdings in the Henry Mountains region of Utah, within Garfield & Wayne Counties. Exploration is currently focused on approximately 5kms of mineralised trend that extends between the Rat Nest & Jeffrey claim groups & includes the Section 36 state lease block. Uranium & vanadium mineralisation in this location is generally shallow at 20-30m average depth. The region forms part of the prolific Colorado Plateau uranium province which historically provided the most important uranium resources in the USA. Sandstone hosted ores have been mined in the region since 1904 and the mining region has historically produced in excess of **17.5Mt @ 2,400ppm U<sub>3</sub>O<sub>8</sub> (92 mlbs U<sub>3</sub>O<sub>8</sub>) and 12,500 ppm V<sub>2</sub>O<sub>5</sub> (482 mlbs V<sub>2</sub>O<sub>5</sub>)<sup>4</sup>.**

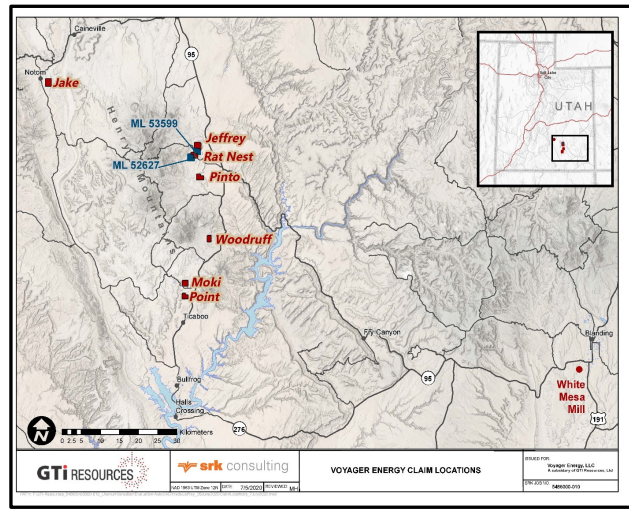

## NIAGARA (KOOKYNIE) GOLD, WESTERN AUSTRALIA<sup>5</sup>

The Niagara project is located ~6 km southwest of Kookynie in the central goldfields of Western Australia. The project comprises one granted exploration licence, E40/342, and six granted prospecting licences, P40/1506, P40/1513, P40/1515, P40/1516, P40/1517 and P40/1518. Access to the project is provided via Goldfields Highway from the town of Menzies and the sealed Kookynie Road which bisects the northern part of exploration licence E40/342 & the southern part of P40/1506 (**Figure 5**). The project is located within the central part of the Norseman-Wiluna greenstone belt. GTI continues to evaluate its options for advancing exploration of the Niagara Gold Project & expects to advise of next steps with the project during the coming months whilst it prioritises exploration of its uranium projects.

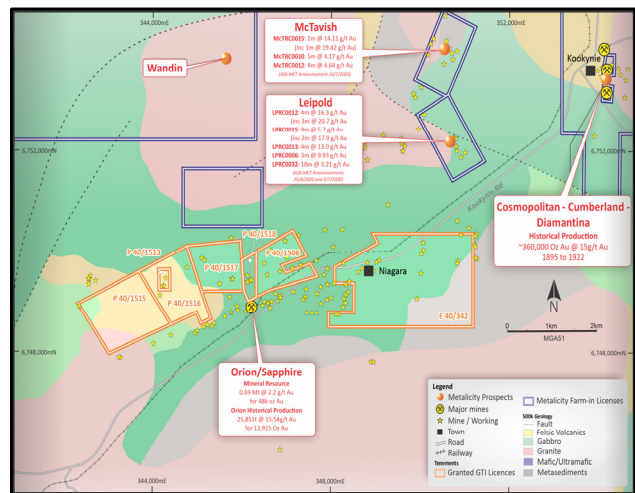

<sup>4</sup> Geology and recognition criteria uranium deposits of the salt wash types, Colorado Plateau Province, Union Carbide Corp, 1981, page 33

<sup>5</sup> <https://www.asx.com.au/asx/statistics/displayAnnouncement.do?display=pdf&idsid=02401075>

## 1. JORC CODE, 2012 EDITION – TABLE 1 REPORT TEMPLATE

### 1.1 Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

| Criteria              | JORC Code explanation   | Commentary   |
|-----------------------|---|--|
| Sampling techniques   | <ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity &amp; the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul> | <ul style="list-style-type: none"> <li>Downhole instruments were utilized to measure natural gamma emission from the rock formation.</li> <li>Natural gamma data from a calibrated sonde was utilized to calculate eU<sub>3</sub>O<sub>8</sub> grades.</li> <li>Geophysical logging was completed by Hawkins CBM Logging of Wyoming, utilising a recently calibrated gamma ray sonde for measurement of naturally occurring radioactivity (total gamma).</li> <li>Prior to deployment in the field, the sonde was calibrated at the U.S. Department of Energy uranium logging Test pits located in Casper, Wyoming, for the known range and uranium grades present at the Great divide Basin project.</li> </ul> |
| Drilling techniques   | <ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>   | <ul style="list-style-type: none"> <li>24 rotary drill holes have been completed to date.</li> <li>The drill program is continuing.</li> <li>All holes were vertical and 5 inches in diameter.</li> </ul>  |
| Drill sample recovery | <ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>  | <ul style="list-style-type: none"> <li>Where practical rotary samples were collected for possible assay</li> <li>Samples were taken at 5-foot increments for lithological logging and have been preserved for future reference.</li> </ul>   |

| Criteria                                       | JORC Code explanation  | Commentary  |
|--|--|---|
| Logging  | <ul style="list-style-type: none"> <li>• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies &amp; metallurgical studies.</li> <li>• Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>• The total length and percentage of the relevant intersections logged.</li> </ul>   | <ul style="list-style-type: none"> <li>• Lithologic logging of all drill holes was completed by geologists under the direction of the CP.</li> <li>• Geophysical logging provided qualitative analyses of radiometric equivalent uranium thickness and grade.</li> <li>•</li> </ul>   |
| Sub-sampling techniques and sample preparation | <ul style="list-style-type: none"> <li>• If core, whether cut or sawn &amp; whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul> | <ul style="list-style-type: none"> <li>• No core was taken.</li> <li>• Rotary samples were collected for lithological identification.</li> </ul>  |
| Quality of assay data and laboratory tests     | <ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul>   | <ul style="list-style-type: none"> <li>• The data was limited to eU<sub>3</sub>O<sub>8</sub> calculations based on data supplied by a calibrated downhole gamma sonde.</li> <li>• Natural gamma data from a calibrated sonde was utilized to calculate eU<sub>3</sub>O<sub>8</sub> grades.</li> <li>• Geophysical logging was completed by Hawkins CBM Logging of Wyoming, utilising a recently calibrated gamma ray sonde for measurement of naturally occurring radioactivity (total gamma).</li> <li>• Prior to deployment in the field, the sonde was calibrated at the U.S. Department of Energy uranium logging Test pits located in Casper, Wyoming.</li> <li>• eU<sub>3</sub>O<sub>8</sub> grade is considered to be an equivalent assay value</li> <li>• Rotary samples were collected for lithological identification.</li> </ul> |
| Verification of sampling and                   | <ul style="list-style-type: none"> <li>• The verification of significant intersections by either independent or alternative company personnel.</li> <li>• The use of twinned holes.</li> </ul>   | <ul style="list-style-type: none"> <li>• All data was reviewed by the CP.</li> <li>• No adjustments made to the raw gamma data, or to the calculated eU<sub>3</sub>O<sub>8</sub> values outside of standard industry methods.</li> </ul>  |



| Criteria  | JORC Code explanation  | Commentary   |
|---|--|--|
| assaying  | <ul style="list-style-type: none"> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>  |  |
| Location of data points                                 | <ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>  | <ul style="list-style-type: none"> <li>Existing drill holes were surveyed with a Trimble Geo XT GPS, with +/- 0.3m accuracy for northing and easting.</li> <li>Topographic Control (elevation) is from GPS. Accuracy +/- 0.5m</li> <li>Drill hole locations are shown on Figure 1.</li> <li>Location data was collected in latitude and longitude as well as State Plane coordinates.</li> </ul> |
| Data spacing and distribution                           | <ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>                                 | <ul style="list-style-type: none"> <li>Spatial distribution of drill holes was planned to identify the REDOX boundaries indicated by historical data..</li> <li>Downhole gamma logging data was interpreted on 6-inch (0.15m) intervals following standard uranium industry practice in the U.S.</li> </ul>  |
| Orientation of data in relation to geological structure | <ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul> | <ul style="list-style-type: none"> <li>No bias was imparted on the downhole data collected. Mineralisation is generally flat-laying and completed drill holes were vertical.</li> </ul>  |
| Sample security   | <ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>  | <ul style="list-style-type: none"> <li>Geophysical logging data was provided electronically and was provided to GTI and is stored on BRS' local data server which has internal backup and offsite storage protocols in place.</li> </ul>   |
| Audits or reviews                                       | <ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>  | <ul style="list-style-type: none"> <li>No audits or reviews have been undertaken on the downhole geophysical survey data.</li> <li>The calibration data &amp; methods were reviewed &amp; verified by the CP.</li> </ul>   |

## 1.2 Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

| Criteria                                | JORC Code explanation   | Commentary   |
|---|---|--|
| Mineral tenement and land tenure status | <ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>  | <ul style="list-style-type: none"> <li>The Great divide Basin Project is located on unpatented mining lode claims. The Thor portion of the project is shown on figure 1.</li> <li>The mining claims will remain valid so long as annual assessment and recordation payments are made.</li> </ul>   |
| Exploration done by other parties       | <ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>   | <ul style="list-style-type: none"> <li>Exploration for uranium occurred until the late 1970s to early 1980s. Limited information and/or data is available from these activities.</li> </ul>  |
| Geology                                 | <ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>   | <ul style="list-style-type: none"> <li>Uranium deposits associated with fluvial channels and reducing environments within fluvial sandstones. (sandstone-type roll-front uranium deposits)</li> </ul>  |
| Drill hole Information                  | <ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</li> </ul> | <ul style="list-style-type: none"> <li>The location of all existing drill holes is presented in Figure 1. All drill holes are vertical, with measured thicknesses interpreted to equal true thicknesses. All drill holes were approximately 15 cm in diameter. Tables 1 provides the depth, thickness, and equivalent grade of uranium summarized by intercepts data 0.02% eU<sub>3</sub>O<sub>8</sub> cut off. Radiometric data is available in the standard US one half foot (6 inches or 15 cm) thicknesses.</li> </ul> |
| Data aggregation                        | <ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> </ul>  | <ul style="list-style-type: none"> <li>eU<sub>3</sub>O<sub>8</sub> grades were interpreted on 6-inch (15 cm) intervals following standard uranium industry practice in the U.S.</li> <li>No eU<sub>3</sub>O<sub>8</sub> grade calculations were reported for gamma intercepts below 0.02% eU<sub>3</sub>O<sub>8</sub>.</li> </ul>  |

| Criteria   | JORC Code explanation   | Commentary  |
|--|---|---|
| methods  | <ul style="list-style-type: none"> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>                                   |   |
| Relationship between mineralisation widths and intercept lengths | <ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</li> </ul> | <ul style="list-style-type: none"> <li>All drill holes were vertical.</li> <li>Mineralisation within the district is controlled in part by sedimentary bedding features within a relatively flat lying depositional unit.</li> <li>Downhole lengths (intercepts) are believed to accurately represent true widths.</li> </ul> |
| Diagrams   | <ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>  | <ul style="list-style-type: none"> <li>Gamma logging results (eU<sub>3</sub>O<sub>8</sub> grades) are discussed and reported in the text. eU<sub>3</sub>O<sub>8</sub> grades are reported on Tables 1 with drill hole locations presented in Figure 1.</li> </ul>   |
| Balanced reporting   | <ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>   | <ul style="list-style-type: none"> <li>All available results have been reported</li> </ul>  |
| Other substantive exploration data                               | <ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>         | <ul style="list-style-type: none"> <li>All available results have been reported</li> </ul>  |
| Further work   | <ul style="list-style-type: none"> <li>The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>   | <ul style="list-style-type: none"> <li>Further work will include continuation of the planned 100 hole program.</li> </ul>   |