

22 February 2022

ASX:MM8

Harbour View Continues to Deliver with More Outstanding Results

- Harbour View continues to develop into a high-grade open pit and underground opportunity with drilling further extending mineralisation. Highlights include:
 - 12m @ 4.27 g/t Au, 0.04 % Cu, 0.25 g/t Ag from 0m (RC21KP1068) including
 - 4m @ 10.0 g/t Au, 0.08 % Cu, 0.25 g/t Ag from 0m
 - 7m @ 7.6 g/t Au, 0.13 % Cu, 1.6 g/t Ag from 204m (RC21KP1067)
 - 2m @ 9.68 g/t Au, 0.23 % Cu, 1.55 g/t Ag from 35m (RC22KP1074)
 - 18m @ 1.56 g/t Au, 0.87% Cu, 8.54 g/t Ag from 240m (RC22KP1074) including
 - 4m @ 4.56 g/t Au, 3.68 % Cu, 34.93 g/t Ag from 240m
 - 1m @ 23.2 g/t Au, 7.14 % Cu, 93.6 g/t Ag from 193m (RC21KP1071)
 - 5m @ 3.16 g/t Au, 0.84 % Cu, 5.3 g/t Ag from 41m (RC21KP1073)
 - 3m @ 4.2 g/t Au, 0.88 % Cu, 4.6 g/t Ag from 158m (RC21KP1067)
 - 4m @ 3.4 g/t Au, 1.34 % Cu, 9.63 g/t Ag from 166m (RC21KP1065)
 - 1m @ 11.9 g/t Au, 0.56 % Cu and 5.7 g/t Ag from 252m (RC21KP1071)
 - 0.45m @ 19.3 g/t Au, 0.25 % Cu, 1.2 g/t Au from 65m (DD21KP1036)
 - 2.6m @ 1.23 g/t Au, 2.34 % Cu, 23.97 g/t Ag from 238m (DD21KP1036)
- All results to be included in Mineral Resource Estimate (MRE) update targeted for release in April 2022
- The Company has three drill rigs operating at the Ravensthorpe Gold Project (RGP). Assays are pending for some 43 holes representing approximately 11,000 meters of drilling

Managing Director, Paul Bennett, commented:

“Another round of excellent results from Harbour View demonstrating high-grade and continuity along the key structures. The copper and silver grades are also encouraging with copper up to 7% in one of the holes. The consistency of the results demonstrates the team has a very good handle on the mineralisation and we can be confident further drilling will continue to extend it. The results are set to have a significant positive impact on the resource and further illustrates that Harbour View represents a high-grade mining opportunity that remains open both at depth and along strike.”



Overview

Medallion Metals Limited (ASX:MM8, the Company or Medallion) is pleased to report further results from drilling at the Harbour View deposit, part of the Kundip Mining Centre (KMC) which hosts the Company's current JORC 2012 Mineral Resource Estimate (MRE) of 674,000 oz¹. Harbour View is located in the central area of KMC within the greater Ravensthorpe Gold Project (RGP) (Figures 1 & 6).

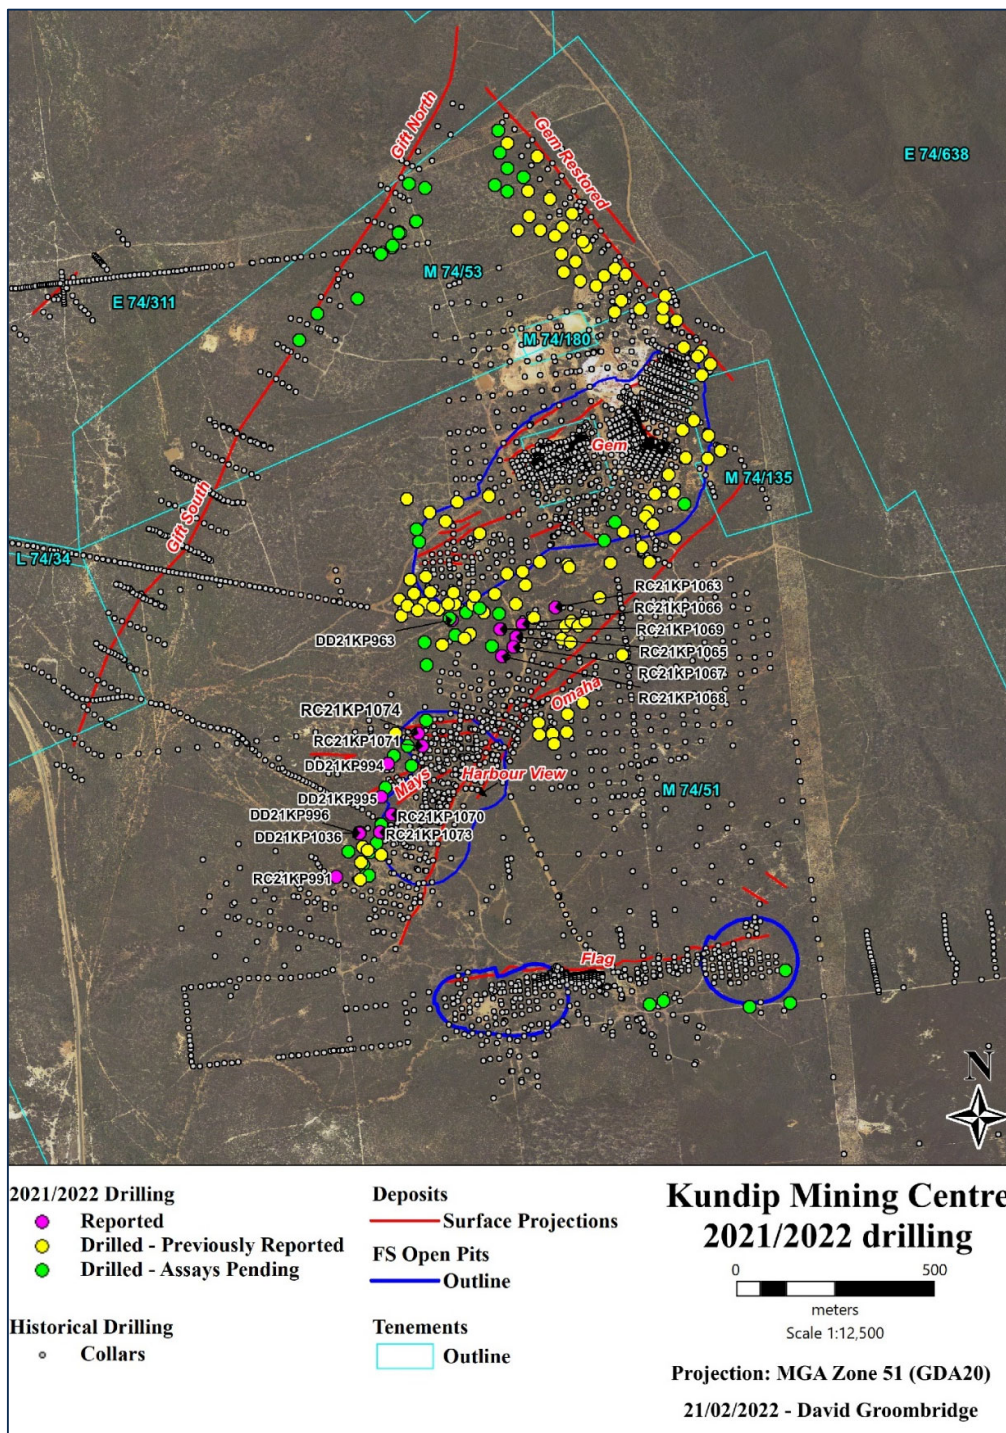


Figure 1: Plan view of Harbour View within KMC showing reported drillhole collar positions.

¹ Total Mineral Resources of 8.8 Mt @ 2.4 g/t Au (7.0 Mt @ 2.3 g/t Au Indicated and 1.8 Mt @ 2.6 g/t Au Inferred), Probable Ore Reserves of 4.1Mt @ 2.1 g/t Au. Refer to the Company's Prospectus announced on the ASX on 18 March 2021 for further details regarding the MRE, Ore Reserves and Competent Person's Statement.



Harbour View

The Harbour View deposit strikes north-northeast for ~1km through the central part of the KMC. The geology consists of andesitic to dacitic volcanoclastics with minor andesite and rhyolite lavas units. Mineralisation is hosted in sub-vertical, parallel sulphide-quartz veins within a chloritic shear zone. Shallow southeast dipping, east-northeast striking cross lodes are observed extending from Harbour View at May and at Omaha (Figure 1).

Final assay results from 2021 combined with the recent 2022 drilling programme results continue to successfully intercept the targeted high-grade plunges at both Harbour View North and Harbour View South. New drill intercepts at Harbour View (>5 gram x metre) are shown in Figures 2 and 3, along with the 2021-22 program and historical results.

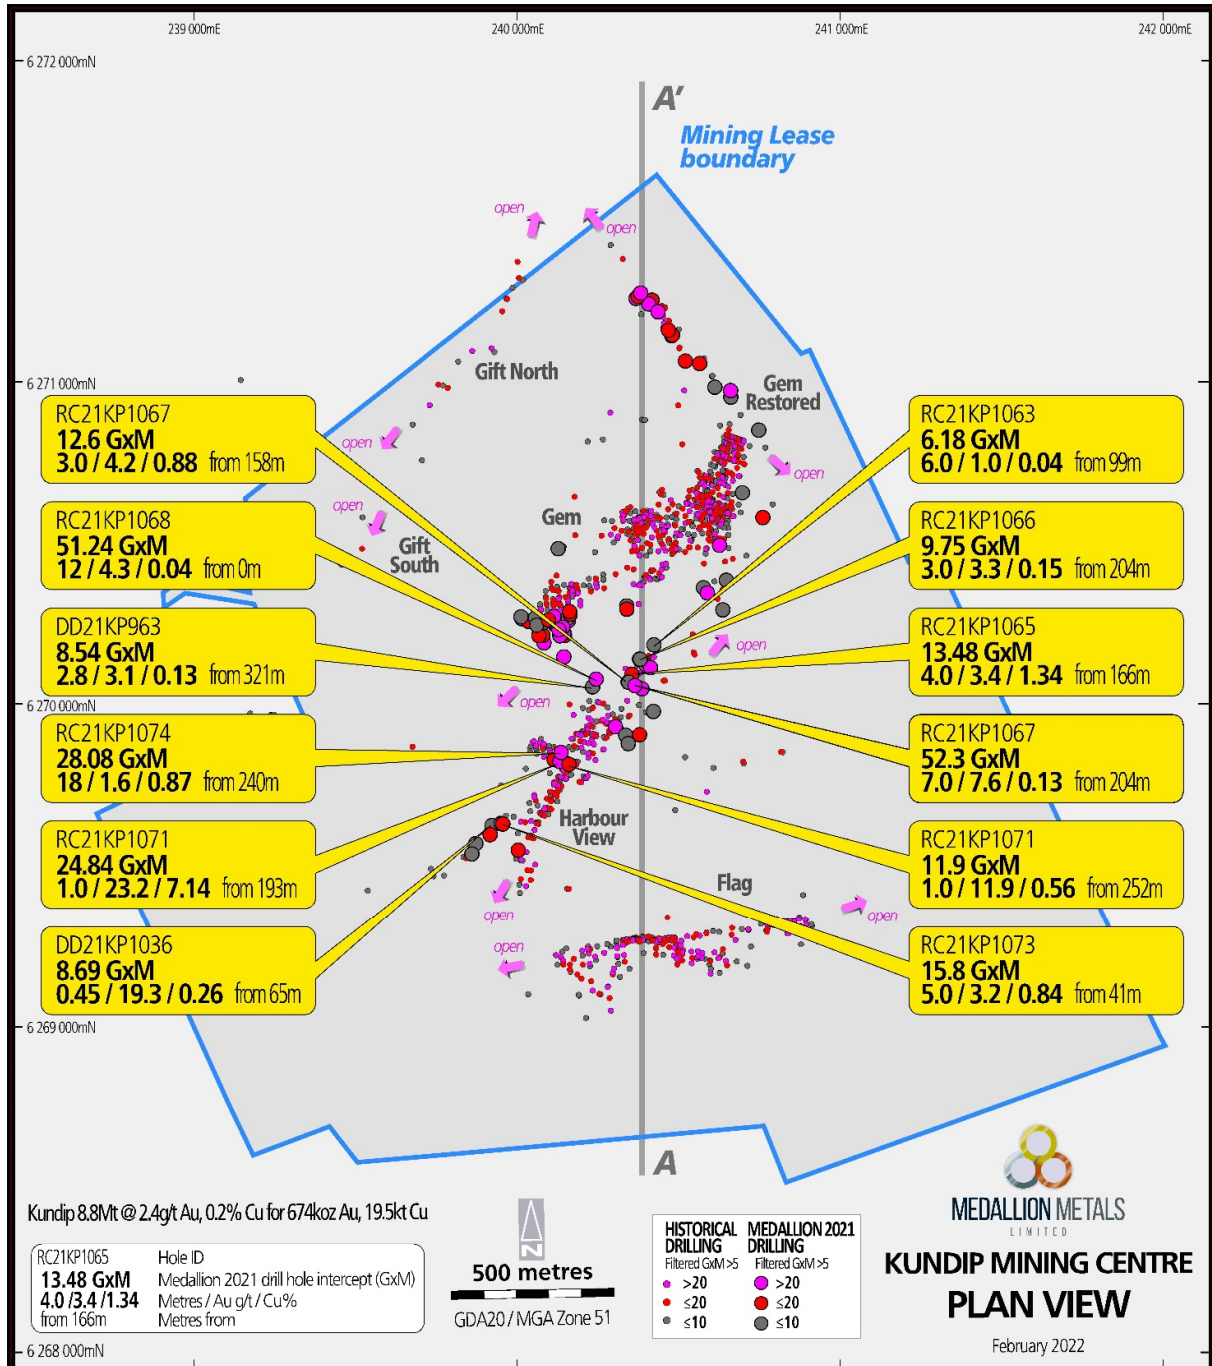


Figure 2: KMC plan. Results reported in this announcement (>5 GxM) in yellow

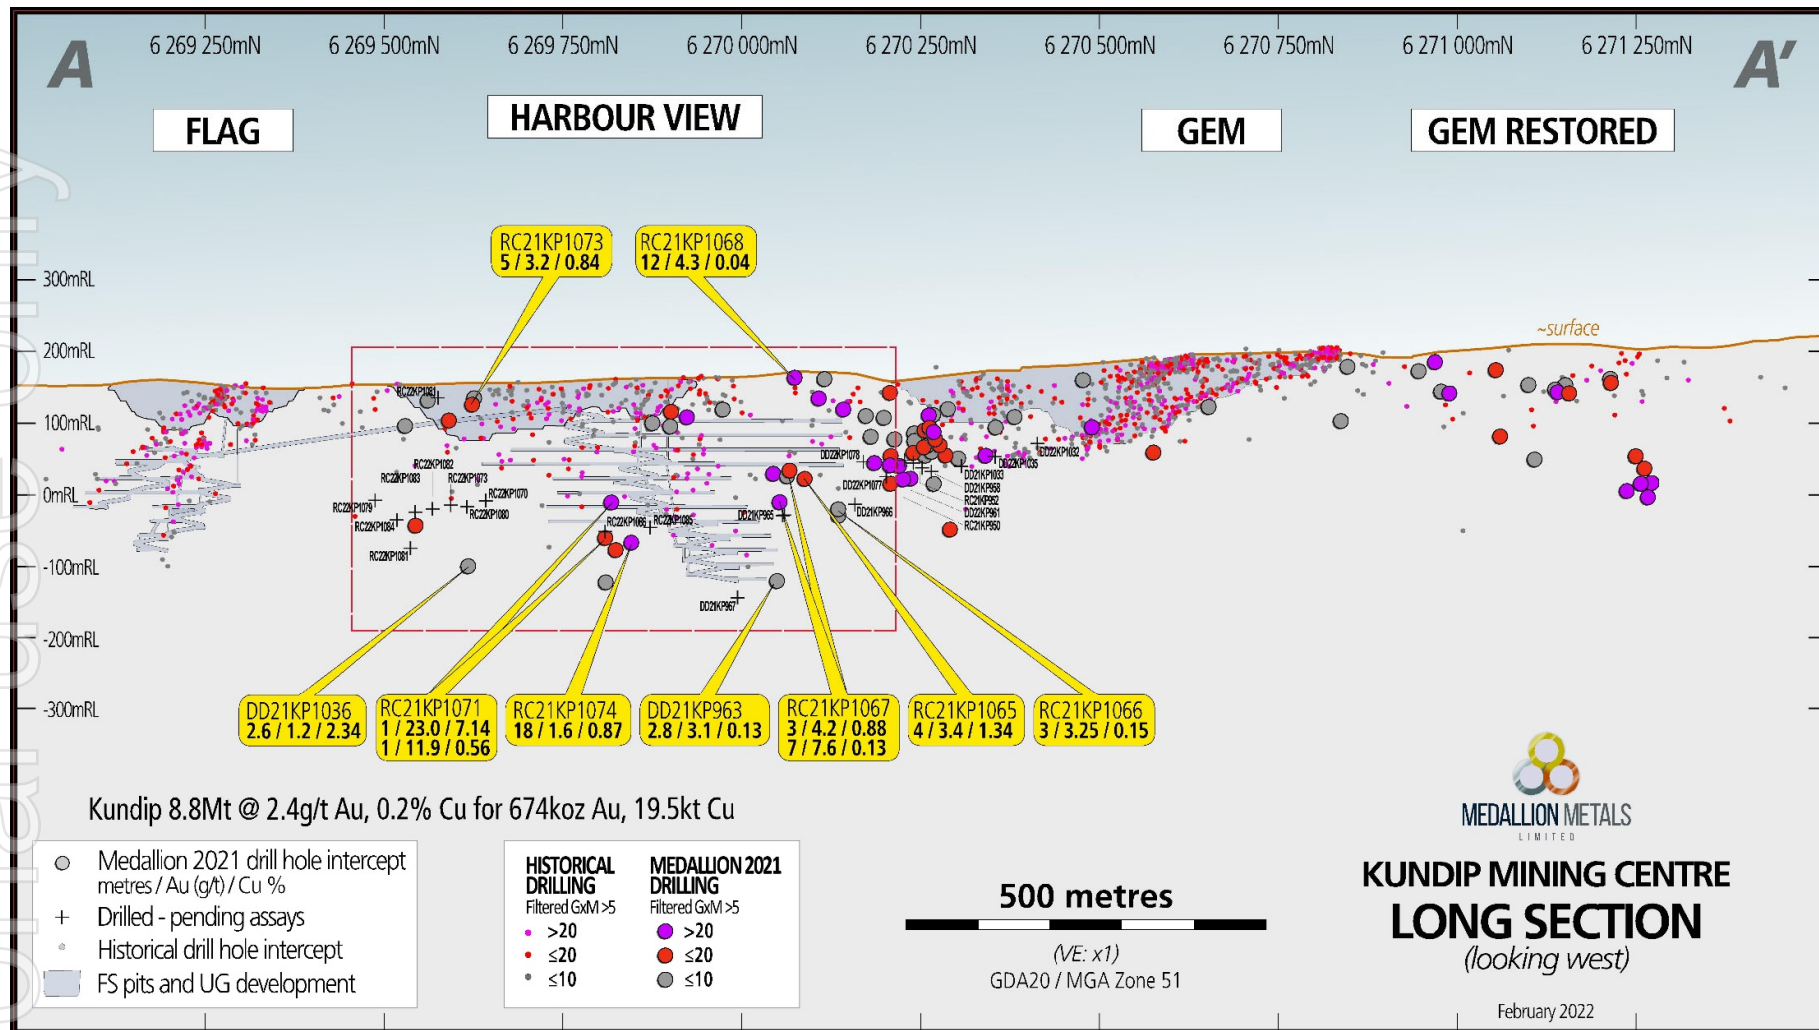


Figure 3: KMC long section. Results reported in this announcement (>5 GxM) in yellow.



Harbour View Drilling

The Diamond (DDH) and Reverse Circulation (RC) drilling program at Harbour View continues to validate the geological model by confirming mineralisation is hosted in multiple sub-vertical, shear hosted lodes that cross-cut the stratigraphy. Drilling has specifically targeted two high-grade plunges within the Harbour View shear; northeast dipping host andesitic agglomerates and; southwest dipping Felsic Porphyry units that plunge shallowly to the south-west.

At Harbour View North, a total of five RC holes down-dip of RC21KP1057 were completed. One diamond hole (DD21KP965) is currently pending assay. Drilling has delineated a southeast plunge extending from RC21KP1057 with highlights including:

- 12m @ 4.27 g/t Au, 0.04 % Cu, 0.25 g/t Ag from 0m (RC21KP1068) including
 - 4m @ 10 g/t Au, 0.08 % Cu, 0.25 g/t Ag from 0m
- 3m @ 4.2 g/t Au, 0.88 % Cu, 4.6 g/t Ag from 158m (RC21KP1067)
- 7m @ 7.6 g/t Au, 0.13 % Cu and 1.6 g/t Ag from 204m (RC21KP1067)
 - 1m @ 37.8 g/t Au, 0.28 % Cu, 2.8 g/t Ag from 207m
- 4m @ 3.4 g/t Au, 1.34 % Cu, 9.63 g/t Ag from 166m (RC21KP1065)
 - 1m @ 9.3 g/t Au, 3.47 % Cu, 25 g/t Ag from 168m
- 2.8m @ 3.05 g/t Au, 0.13 % Cu, 0.7 g/t Ag from 321m (DD21KP963)
 - 0.45m @ 11.6 g/t Au, 0.04 % Cu, 0.86 g/t Ag from 321.55m

Four diamond and three RC holes were drilled at Harbour View South (HVS) and the May cross lodes targeting the south dipping high-grade plunges. Significant intercepts from the drilling include:

- 1m @ 23.2 g/t Au, 7.14 % Cu, 93.6 g/t Ag from 193m (RC21KP1071) – HVS
- 1m @ 11.9 g/t Au, 0.56 % Cu and 5.7 g/t Ag from 252m (RC21KP1071) – HVS
- 2m @ 9.68 g/t Au, 0.23 % Cu, 1.55 g/t Ag from 35m (RC22KP1074) – May
- 18m @ 1.56 g/t Au, 0.87% Cu, 8.54 g/t Ag from 240m (RC22KP1074) – HVS
 - 4m @ 4.56 g/t Au, 3.68 % Cu, 34.93 g/t Ag from 240m
- 6m @ 1.07 g/t Au, 0.08 % Cu, 0.25 g/t Ag from 30m (RC21KP1073) – May
- 5m @ 3.16 g/t Au, 0.84 % Cu, 5.3 g/t Ag from 41m (RC21KP1073) – May

All new drill holes with assay results above 0.5 g/t Au are presented in Annexure 1 and 2.



Figure 5: Steeply west dipping, Pyrite-Chalcopyrite-Quartz veining within DD21KP1036 with the Harbour View South main lode from 238.4m hosting 2.6m @ 1.23 g/t Au, 2.34 % Cu, 23.97 g/t Ag.

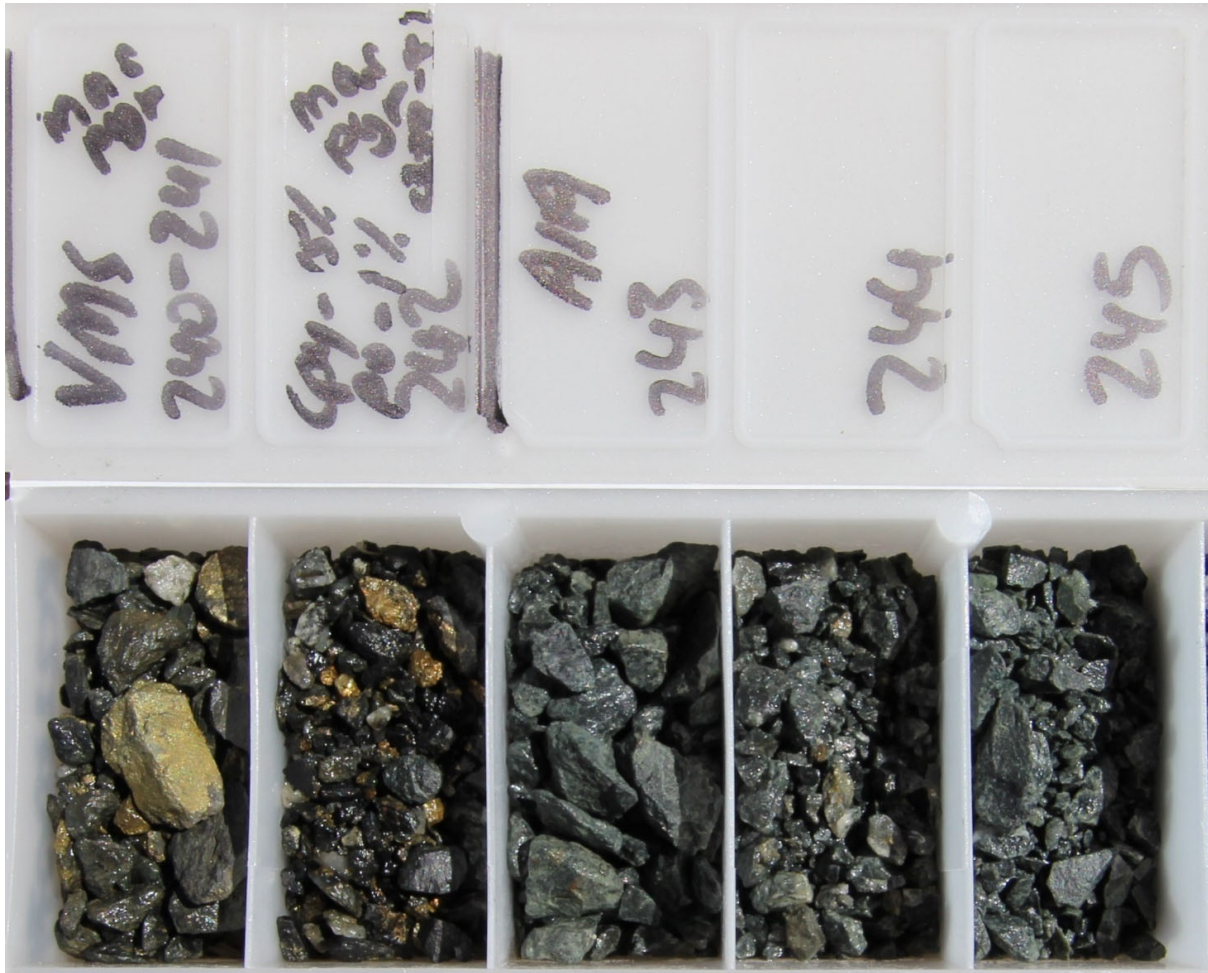


Figure 4: Massive sulphide (>80% sulphides) veining between 240m-242m comprised of pyrite (65%), chalcopyrite (15%), pyrrhotite (1%). The 2m interval from 240m graded at 7.7 g/t Au, 3.68 % Cu, 39.5 g/t Ag.

Exploration Programme Update

Medallion completed approximately 29,000m of RC and DDH drilling at RGP throughout 2021. The Company currently has three drill rigs (1 RC and 2 DDH) deployed at RGP. An RC and DDH rig are active at the Meridian prospect (Figure 6) with the second DDH rig currently at Harbour View South targeting extensions to the high-grade plunges. Medallion plans to drill approximately 16,000m of combined RC and DDH drilling at RGP in the first half of 2022.

165 holes from the 208 holes completed during 2021-22 have had assays reported, representing approximately 24,860m of drilling.

A global MRE update is underway and results are expected to be announced early in the June quarter of 2022, subject to laboratory assay turn around times. The MRE update will incorporate approximately 30,000m of new drilling data.

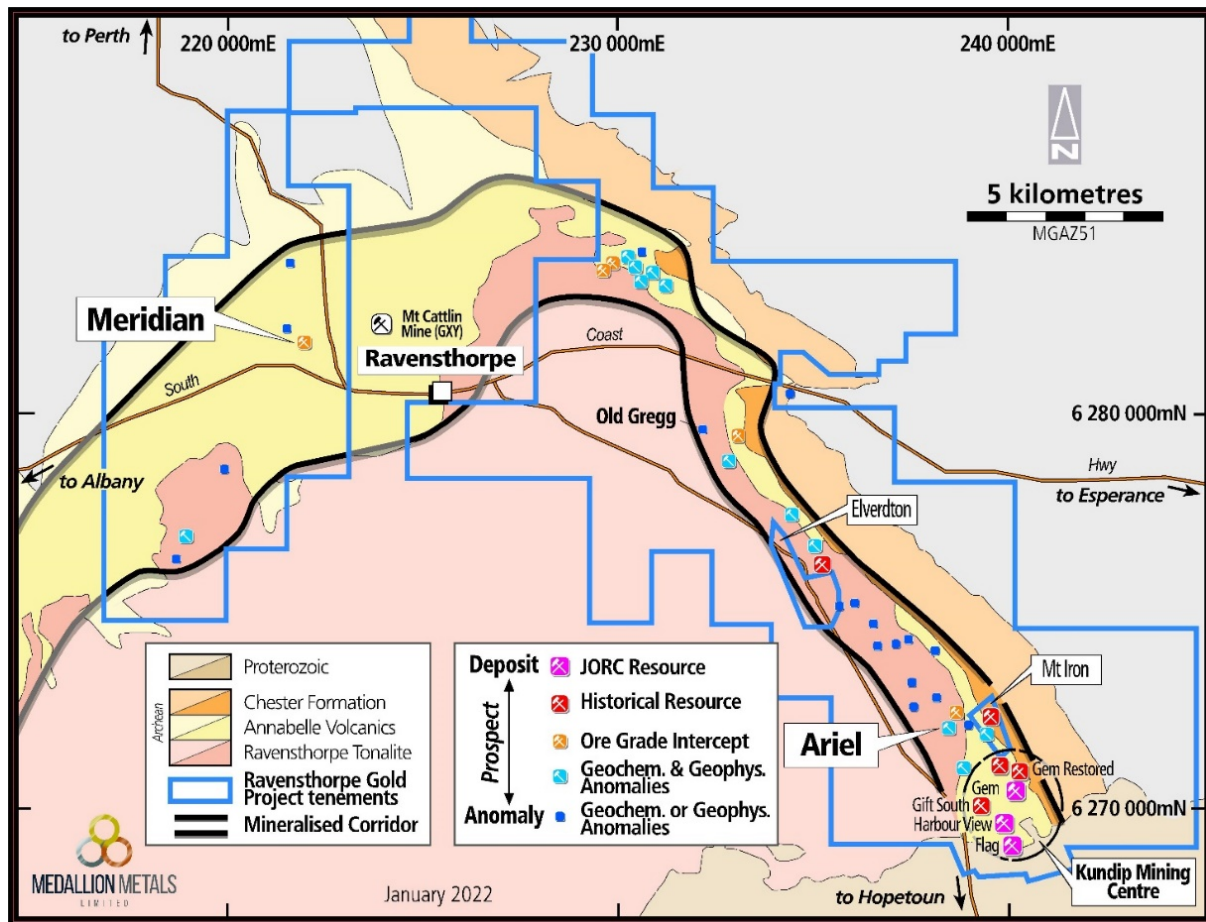


Figure 6: Location of Ravensthorpe Gold Project showing Harbour View deposit location within the Kundip Mining Centre

This announcement is authorised for release by the Board of Medallion Metals Limited.

-ENDS-

For further information, please visit the Company's website www.medallionmetals.com.au or contact:

Paul Bennett
 Managing Director
 Medallion Metals Limited
 Phone: +61 8 6424 8700
 Email: info@medallionmetals.com.au
 Suite 1, 11 Ventnor Avenue, West Perth WA 6005

**DISCLAIMER**

References in this announcement may have been made to certain ASX announcements, including exploration results, Mineral Resources and Ore Reserves. For full details, refer said announcement on said date. The Company is not aware of any new information or data that materially affects this information. Other than as specified in this announcement and mentioned announcements, the Company confirms it is not aware of any new information or data that materially affects the information included in the original market announcement(s), and in the case of estimates of Mineral Resources and Ore Reserves, that all material assumptions and technical parameters underpinning the estimates in the relevant announcement continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original announcement.

CAUTIONARY STATEMENT

Certain information in this announcement may contain references to visual results. The Company draws attention to the inherent uncertainty in reporting visual results.

COMPETENT PERSONS STATEMENT

The information in this announcement that relates to exploration results is based on information compiled by Mr David Groombridge, a Competent Person who is a Member the Australasian Institute of Mining and Metallurgy ("AusIMM"). Mr Groombridge is an employee of the Company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Mineral Resources and Ore Reserves' (the "JORC Code"). Mr Groombridge consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.



ANNEXURE 1: 2022 Harbour View Collar Table

Hole ID	Prospect	Hole Type	Depth (m)	Grid ID	Easting	Northing	RL	Dip (°)	Azimuth
DD21KP963	Harbour View North	DD	465	MGA2020_51	240115	6270167	154.6	-62	129
DD21KP994	Harbour View South	DD	447.3	MGA2020_51	239953	6269804	156	-60	110
DD21KP995	Harbour View South	DD	357.4	MGA2020_51	239936	6269720	155	-60	110
DD21KP996	Harbour View South	DD	393	MGA2020_51	239882	6269629	152	-60	100
DD21KP1036	Harbour View South	DD	365.75	MGA2020_51	239883	6269631	153	-53	100
RC21KP991	Mays	RC	85	MGA2020_51	239823	6269520	150	-60	305
RC21KP1063	Harbour View North	RC	259	MGA2020_51	240376	6270199	168	-62	110
RC21KP1065	Harbour View North	RC	199	MGA2020_51	240277	6270125	166	-60	111
RC21KP1066	Harbour View North	RC	217	MGA2020_51	240293	6270157	162	-64	105
RC21KP1067	Harbour View North	RC	223	MGA2020_51	240270	6270099	168	-60	111
RC21KP1068	Harbour View North	RC	229	MGA2020_51	240241	6270076	168	-60	111
RC21KP1069	Harbour View North	RC	259	MGA2020_51	239237	6270144	165	-60	111
RC21KP1070	Harbour View South	RC	247	MGA2020_51	239964	6269677	160	-60	107
RC21KP1071	Harbour View South	RC	259	MGA2020_51	240041	6269849	158	-60	107
RC21KP1073	Harbour View South	RC	127	MGA2020_51	239934	6269632	161	-60	107
RC22KP1074	Harbour View South	RC	280	MGA2020_51	240030	6269881	151	-60	107

ANNEXURE 2: 2022 Harbour View Drill Results

Drill hole intersections tabulated below are calculated with a 0.5 g/t Au lower cut-off and include 1m maximum internal dilution.

Hole ID	Depth From (m)	Depth To (m)	Interval Width (downhole)	Au (ppm)	Cu (ppm)	Ag (ppm)	Comments
DD21KP963	321	323.8	2.8	3.05	1332	0.66	
DD21KP963	325.55	326.6	1.05	2.26	4452	2.89	
DD21KP994	64	65	1	1.04	563	2	May Lode
DD21KP994	306.46	307.5	1.04	0.89	8700	25.2	HVS Main Lode
DD21KP994	330.4	331.4	1	0.95	7250	5.5	HVS Footwall Lode
DD21KP995	238	239	1	0.58	138	0.25	HVS Main Lode
DD21KP995	244	244.5	0.5	0.91	1700	0.5	HVS Main Lode
DD21KP995	255.17	256.1	0.93	2.32	5963	2.94	HVS Footwall Lode
DD21KP996	NSA						Low grade mineralisation present <1m @ 0.5 g/t cut-off on May, HVS and HVS-FW
DD21KP1036	64.75	65.2	0.45	19.3	2560	1.2	May Lode
DD21KP1036	151.4	153.4	2	0.37	3272.5	3.54	May Lode
DD21KP1036	238.4	241	1.1	2.43	53283	52.91	HVS Main Lode
RC21KP991	18	19	1	0.73	2240	2.21	May Lode
RC21KP1063	99	105	6	1.03	391.5	1.86	
RC21KP1063	107	112	5	0.99	445.4	0.34	
RC21KP1063	168	172	4	0.52	90	0.60	
RC21KP1063	216	220	4	0.55	164	0.25	
RC21KP1063	249	250	1	3.67	1640	2.7	
RC21KP1065	27	31	4	0.86	939	0.80	
RC21KP1065	166	170	4	3.37	13350	9.63	
RC21KP1066	86	90	4	1.15	1540	2.85	
RC21KP1066	204	207	3	3.25	1462	1.32	
RC21KP1066	209	213	4	1.89	247	0.60	
RC21KP1067	124	126	2	0.99	1180	0.70	
RC21KP1067	137	138	1	1.83	2.5	0.25	
RC21KP1067	158	161	3	4.2	8844	4.58	
RC21KP1067	163	167	4	2.17	4850	3.18	
RC21KP1067	204	211	7	7.6	1317	1.61	
RC21KP1068	0	12	12	4.27	423.67	0.25	
RC21KP1068	87	91	4	0.52	462	0.25	
RC21KP1068	153	154	1	0.78	232	0.25	
RC21KP1069	11	15	4	0.52	703	0.25	



RC21KP1070	49	50	1	1.43	156	0.25	
RC21KP1071	193	194	1	23.2	71400	93.6	
RC21KP1071	252	253	1	11.9	5600	5.70	
RC21KP1073	30	36	6	1.17	885	0.25	
RC21KP1073	41	46	5	3.16	8366	5.30	
RC21KP1073	61	62	1	1.02	1610	1.40	
RC21KP1074	35	36	2	9.68	2323	1.55	
RC21KP1074	55	58	3	1.42	1300	1.17	
RC21KP1074	240	241	4	4.59	36775	34.93	
RC21KP1074	246	250	4	1.65	819	1.00	
RC21KP1074	254	258	4	0.59	391	0.80	

NSA = No Significant Assay



ANNEXURE 3: Harbour View 2022 Drilling JORC Table 1

Section 1, Sampling Techniques and Data

(Criteria in this section applies to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> All drilling and sampling was undertaken in an industry standard manner. Reverse Circulation (RC) samples outside of mineralised zones were collected by spear from 1m "green bag" samples from the drill rig cyclone and composited over 4m intervals. Sample weights ranges from around 1-3kg. RC samples within mineralised intervals determined by a geologist were sampled on a 1m basis with samples collected from a cone splitter mounted on the drill rig cyclone. 1m sample mass typically range between 2.5-3.5kg. Diamond Drill holes (DDH) at Kundip were completed by Medallion Metals which followed protocols and QAQC procedures as per industry best practice. Core samples were collected with a diamond rig drilling HQ3 (61mm) from surface within weathered and saprolite material before casing off within hard rock and completing the hole with NQ2 (51mm) diameter core. All DDH have been reconstructed and orientated, logged geologically, and marked up for assay at a minimum sample interval of 0.3m to ensure adequate sample weight and a maximum sample interval of 1m, constrained by geological boundaries. All DDH core is stored in industry standard core trays and racks and is labelled with the drill hole ID and core intervals. The independent laboratory pulverises the entire sample for analysis as described below. Industry prepared independent standards are inserted approximately 1 in 20 samples. Duplicate RC samples are collected from the drill rig cyclone, primarily within mineralised zones equating to a 1:33 ratio. The independent laboratory then takes the samples which are dried, split, crushed, and pulverized prior to analysis as described below. Sample sizes are considered appropriate for the material sampled. The samples are considered representative and appropriate for this type of drilling. RC and DDH core samples are appropriate for use in a resource estimate.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> RC holes were drilled by Precision Exploration Drilling (PXD) with a 5 1/2-inch bit and face sampling hammer. DDH were drilled from surface by PXD using HQ3 (61mm) diameter in weathered, broken ground before casing off and drilling NQ2 (51mm) to end of hole.



Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> • RC samples are routinely checked for recovery, moisture, and contamination. • DDH core recovery is measured for each drilling run by the driller and then checked by the Company's geological team during the mark up and logging process. • No sample bias is observed.
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> • Geology logging is undertaken for the entire hole recording lithology, oxidation state, metadata, alteration, and veining. • RC sample quality data recorded includes recovery, sample moisture (i.e., whether dry, moist, wet or water injected) Magnetic Susceptibility and sampling methodology. • DDH structural logging, recovery of core, hardness, and Rock Quality Designation (RQD's) and Magnetic Susceptibility are all recorded from drill core. • No metallurgical testwork has been undertaken on the samples reported. • The logging process is appropriate to be used for Mineral Resource estimates and mining studies with additional metallurgical testwork to be completed. • General logging data captured are; qualitative (descriptions of the various geological features and units) and quantitative (numbers representing structural amplitudes, vein percentages, rock mass quality and hardness). • DDH core is photographed in both dry and wet form All drillholes were logged in full.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> • RC sampling was carried out every 1m by a cone splitter on a rig cyclone. • Within mineralised zones, 1m calico samples directly from the cyclone were submitted for analysis. • In barren zones spear samples were collected at 2-4m composites from the un-split portion of the sample using a 50mm PVC spear. • DDH core samples were collected with a diamond drill rig drilling NQ2 or HQ3 core. After logging and photographing, diamond core was cut within a Discoverer® Automatic Core Cutting Facility using a Corewise Auto Core Saw. • DDH core was cut in half, with one half sent to the laboratory for assay and the other half retained. • Holes were sampled over mineralised intervals to geological boundaries on a nominal 1m basis with a minimum of 0.3m and maximum of 1m. • Field QAQC procedures involve the use of certified reference material (CRM) inserted approximately 1 in 20 samples. • Each sample was dried, split, crushed, and pulverised. • Sample sizes are considered appropriate for the style of mineralisation (massive and disseminated sulphides-quartz veins), the thickness and consistency of the intersections, the sampling methodology and percent value assay ranges for the primary elements at Kundip.



		<ul style="list-style-type: none"> RC samples are appropriate for use in a Mineral Resource Estimate.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established. 	<ul style="list-style-type: none"> Samples were submitted to SGS Laboratory in Perth. Au was analysed by Fire Assay fusion (50g) followed by AAS finish. A multi-element suite analysed for Ag, Al, As, Ba, Be, Bi, Ca, Cd, Ce, Co, Cs, Cr, Cu, Er, Eu, Fe, Ga, Gd, Hf, Ho, In, K, La, Li, Lu, Mg, Mn, Mo, Na, Nb, Nd, Ni, P, Pb, Pr, Rb, S, Sb, Sc, Se, Sm, Sn, Sr, Ta, Tb, Te, Th, Ti, Tl, Tm, U, W, Y, Yb and Zn. Analytical techniques used a four-acid digest (DIG40Q) FA/AAS finish. The acids used are hydrofluoric, nitric, perchloric and hydrochloric acids, suitable for silica-based samples. Analytical techniques for the multi-element analysis used a four-acid digest (DIG40Q) with a ICM-MS and ICP-AES finish. The techniques are considered quantitative in nature. As discussed previously, CRMs were inserted by the Company and the laboratory also carries out internal standards in individual batches. Sample preparation for fineness were carried by the SGS Laboratory as part of their internal procedures to ensure the grind size of 90% passing 75 micron was being attained. Repeat or duplicate analysis for samples reveals that precision of samples is within acceptable limits.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned drillholes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> Significant intersections have not been independently verified. No twinned holes have been completed. Sample results have been synced by Company geologists once logging completed into a cloud hosted database managed by Maxgeo. Assays from the laboratory are checked and verified by Maxgeo database administrator before uploading. No adjustments have been made to assay data. Results are reported on a length weighted basis.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Drill collars have been picked up using a handheld Garmin GPS to an accuracy of +/- 3m. Drill holes were surveyed downhole by Downhole Surveys DeviGyro continuous Rate Gyro tool. Azimuths are determined using an DeviAligner which has an Azimuth Accuracy of 0.23° sec latitude and Tilt and Roll Accuracy of 0.1° Downhole surveys are uploaded to the DeviCloud, a cloud-based data management program where surveys are validated and approved by the geologist before importing into the database. The grid projection is GDA20/ MGA Zone 51. Diagrams and location table are provided in the report.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. 	<ul style="list-style-type: none"> The combined RC and DDH program comprise drillhole spacings that vary from 40m x 40m to 40m x 20m. All holes have been geologically logged and provide a strong basis for geological control and continuity of mineralisation.



	<ul style="list-style-type: none"> Whether sample compositing has been applied. 	<ul style="list-style-type: none"> No Mineral Resource or Ore Reserve estimations are presented. No sample compositing has been applied except in the reporting of drill intercepts, as described in this table.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> The orientation of drilling at Kundip is approximately perpendicular to the strike and dip of the mineralisation where known. Sampling is therefore considered representative of the mineralised zones. The chance of bias introduced by sample orientation is considered minimal.
Sample security	<ul style="list-style-type: none"> The measures taken to ensure sample security. 	<ul style="list-style-type: none"> Samples are collected by Company personnel in calico bags, which are in turn placed in polyweave bags. Polyweave bags are transferred into bulka bags for transport which are secured on wooden pallets. and transported directly via road freight to the laboratory with a corresponding submission form and consignment note. The laboratory checks the samples received against the submission form and notifies the Company of any missing or additional samples. Once the laboratory has completed the assaying, the pulp packets, pulp residues and coarse rejects are held in the Laboratory's secure warehouse. On request, the pulp packets are returned to the site warehouse on secure pallets where they are stored.
Audits or reviews	<ul style="list-style-type: none"> The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> No external audits or reviews have been undertaken at this stage of the programme.



Section 2, Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Kundip deposits are situated within Mining tenements 74/41, 74/51, 74/53 and 74/135. All tenements are wholly owned by Medallion Metals Ltd. There are no known heritage or environmental impediments to development over the leases where significant results have been reported. The tenements are in good standing with the Western Australian Department of Mines, Industry Regulation and Safety. No known impediments exist to operate in the area.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Historical exploration, underground and open pit mining was carried out at Kundip by various parties between 1901 and the 1990's. Total historical production from Kundip is reported as 74,571 ounces of gold (from 127,514 tonnes grading at 18g/t Au) from both open pit and underground and predominantly from above the water table (Younger 1985, Read 1987, ACH Minerals Pty Ltd 2020). Refer to the Company's Prospectus announced on the ASX on 18 March 2021 for further details regarding the historical drilling undertaken at the Harbour View deposit and the Kundip Mining Centre more generally.
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Geology hosting gold - copper mineralisation consists of a thick package of Archaean basaltic to dacitic lavas and volcanoclastics intruded by a series of tonalitic, dolerite, microdiorite dykes. The mineralisation style is not well understood to date, but it is thought to be hydrothermally emplaced within brittle structures. Mineralisation at Harbour View is hosted within several north-northeast striking, sub-parallel, en-echelon, quartz-sulphide lodes. Mineralisation is characterised as sulphide-quartz veins with chlorite alteration haloes.
Drillhole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: <ul style="list-style-type: none"> easting and northing of the drillhole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Drill hole location and directional information is provided within the body of the report and within Annexure 1. All RC and DDH drilling is included in the plan view maps.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be 	<ul style="list-style-type: none"> Grades are reported as down-hole length weighted averages. Headline composite grades reported to a minimum cut-off grade of 0.5 g/t Au and



	<p>stated.</p> <ul style="list-style-type: none"> Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated 	<p>maximum internal dilution of 1.0m.</p> <ul style="list-style-type: none"> Results in Annexure 2 and on figures are reported to a minimum cut-off grade of 0.5g/t Au and maximum internal dilution of 1.0m. No top-cuts have been applied to reporting of assay results. No metal equivalent values have been reported.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known'). 	<ul style="list-style-type: none"> The drill holes are interpreted to be approximately perpendicular to the strike of mineralisation. Reported intersections are approximate, but are not true width, as drilling is not always exactly perpendicular to the strike/dip of mineralisation. Estimates of true widths will only be possible when all results are received, and final geological interpretations have been completed.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of the drillhole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Plans and sections are provided in the main body of the report.
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All drill collar locations are shown in figures and all results, including those with no significant assays, are provided in this report. Drill holes with pending assays are also shown in figures. The report is considered balanced and in context.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Drilling across the Kundip Mining Centre is currently on-going. Approximately 36,000 meters of drilling has been completed during 2021 and 2022 to date comprised of 208 DDH and RC drill holes. Results from 165 holes have been reported with 43 holes either awaiting sampling or with assays pending. All other meaningful and material data is reported.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Drilling in 2022 has commenced across the Kundip Mining Centre. A total of 78 additional DDH and RC holes have been designed in the first half of 2022. Further drilling may be undertaken subject to the results of that work. Drilling is underway at the Meridian prospect where a 14 diamond and RC program will be completed by the end of February 2022. Upon receipt of outstanding assays, the completion the remaining drilling and of geophysical data processing, results will be analysed.