

7 July 2022

## Inaugural 5,000m Drilling Program Completed at Mavis Lake

Critical Resources Limited (ASX:CRR) ("Critical Resources" or the "Company"), is pleased to advise that another five step-out holes have intersected intervals of spodumene-bearing pegmatite. This marks the completion of the inaugural 5,000m Drilling Program at the Company's 100% owned Mavis Lake Lithium Project ("the Project") in Ontario, Canada. At completion, 35 of a total 37 holes drilled had intersected spodumene-bearing pegmatites within the Pegmatite 6 zone.

### Highlights<sup>1,2,3</sup>

#### Hole 37

- 14.75m of ~16% fine to large spodumene laths from 152.25 to 167m within pegmatite

#### Hole 36

- 9.65m of ~23% fine to large spodumene laths from 131.6 to 141.25m within pegmatite

#### Hole 33

- 2.75m of ~5% fine to large spodumene laths from 16.45 to 19.2m within pegmatite

#### Hole 34

- 3.5m of ~5% fine to large spodumene laths from 64.5 to 68m within pegmatite

#### Hole 35

- 5.8m of <5% fine to large spodumene laths from 115.8 to 121.6m within pegmatite

- Inaugural 5,000m drill program completed
- 35 out of 37 drill holes intersected spodumene-bearing pegmatite mineralisation
- Approvals have now been received which allows the Company to double its drilling campaign, for an additional 5,000m (10,000m in total)

*Figure 1: Significant white-grey medium to large spodumene laths within MF22-95 (Hole 36)*



<sup>1</sup>In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analysis. Laboratory assay results are required to determine the widths and grade of the visible mineralisation reported in preliminary geological logging. The Company will update the market when laboratory analytical results become available.

<sup>2</sup>The reported intersections are down hole measurements and are not necessarily true width

<sup>3</sup>Descriptions of the mineral amounts seen and logged in the core are qualitative, visual estimates (they are listed in order of abundance of estimated combined percentages). Quantitative assays will be completed by Activation Labs in Dryden, Ontario.

Critical Resources Managing Director Alex Biggs said: "Having 35 out of 37 holes intersecting spodumene bearing mineralisation is a fantastic result and proves the significance of the Mavis Lake Pegmatite field. Importantly the Company has now received the necessary approvals to extend drilling by an additional 5,000m. The Company remains focussed on its goal of defining a JORC resource at Mavis Lake, and looks forward to providing an update with regard to Phase 2 drilling at the Project, including assay results as soon as possible".

### Hole MF22-96 (Hole 37)

#### Significant spodumene-bearing pegmatite intersected at depth

MF22-96 intersected thick spodumene-bearing pegmatite located at depth. These thicker intervals continue to be intersected at depth and will continue to be tested with more drilling during the infill program. Spodumene laths range from fine to large and are typically white-grey.

*Figure 2: White pegmatite hosts approximately 16% of fine to large, white-grey, spodumene laths intersected from 152.25 to 167m depth in Hole MF22-96 (Hole 37). Close-ups illustrate presence of significant spodumene*




### Hole MF22-95 (Hole 36)

#### Intersection of a thick interval of visually high amount of spodumene-bearing pegmatite

MF22-95 intersected spodumene-bearing pegmatite with significant internal sub-metre to metre scale zonations. Spodumene laths range from fine to large and are typically white-grey. This thick interval was intersected at depth and will continue to be tested in further drilling.



**Figure 3: White pegmatite hosts approximately 23% of fine to large, white-grey, spodumene laths intersected from 131.6 to 141.25m depth in Hole MF22-95 (Hole 36). Close-ups illustrate presence of significant spodumene**

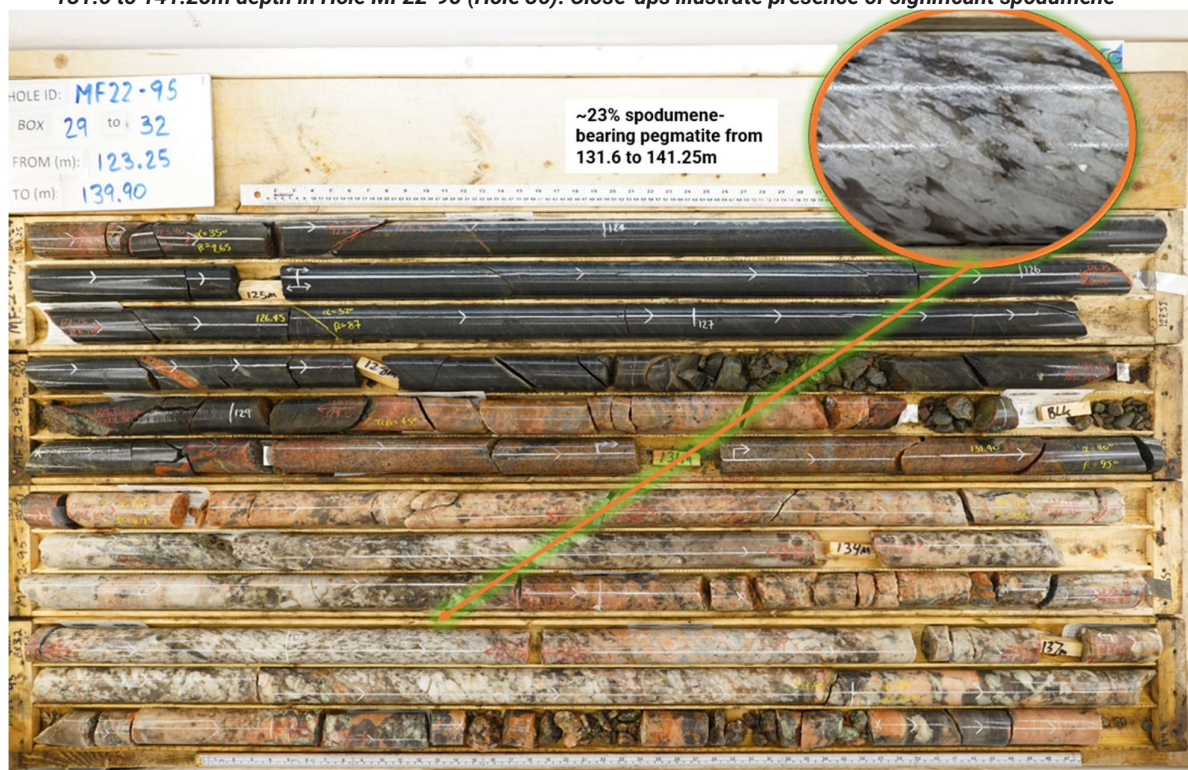

#### **Hole MF22-92 (Hole 33), MF22-93 Hole 34), and MF22-94 (Hole 35)**

##### **Infill drilling continues the continuity of spodumene-bearing pegmatites**

The three step out holes were designed to perform infill drilling for the purposes of a resource model. These holes all likely intersected the pinch area of the pegmatites boudinage structure. These pinch out areas are typically more susceptible to sericite alteration of the spodumene minerals. Only up to 5% visual spodumene laths were intersected within the zones and hosted significant sericite. The presences of spodumene within these holes continue to prove Pegmatite 6's continuity and mineralisation as drilling continues to the west.



**Figure 4: White pegmatite hosts approximately 5% of fine to large, white-grey, spodumene crystals intersected from 16.45 to 19.2m depth in Hole MF22-92 (Hole 33). Close-ups illustrate presence of significant spodumene**




**Figure 5: White pegmatite hosts approximately 5% of fine to large, white-grey, spodumene crystals intersected from 64.5 to 68m depth in Hole MF22-93 (Hole 34). Close-ups illustrate presence of significant spodumene**







**Figure 6: White pegmatite hosts approximately <5% of fine to large, white-grey, spodumene crystals intersected from 115.8 to 121.6m depth in Hole MF22-94 (Hole 35). Close-ups illustrate presence of significant spodumene**

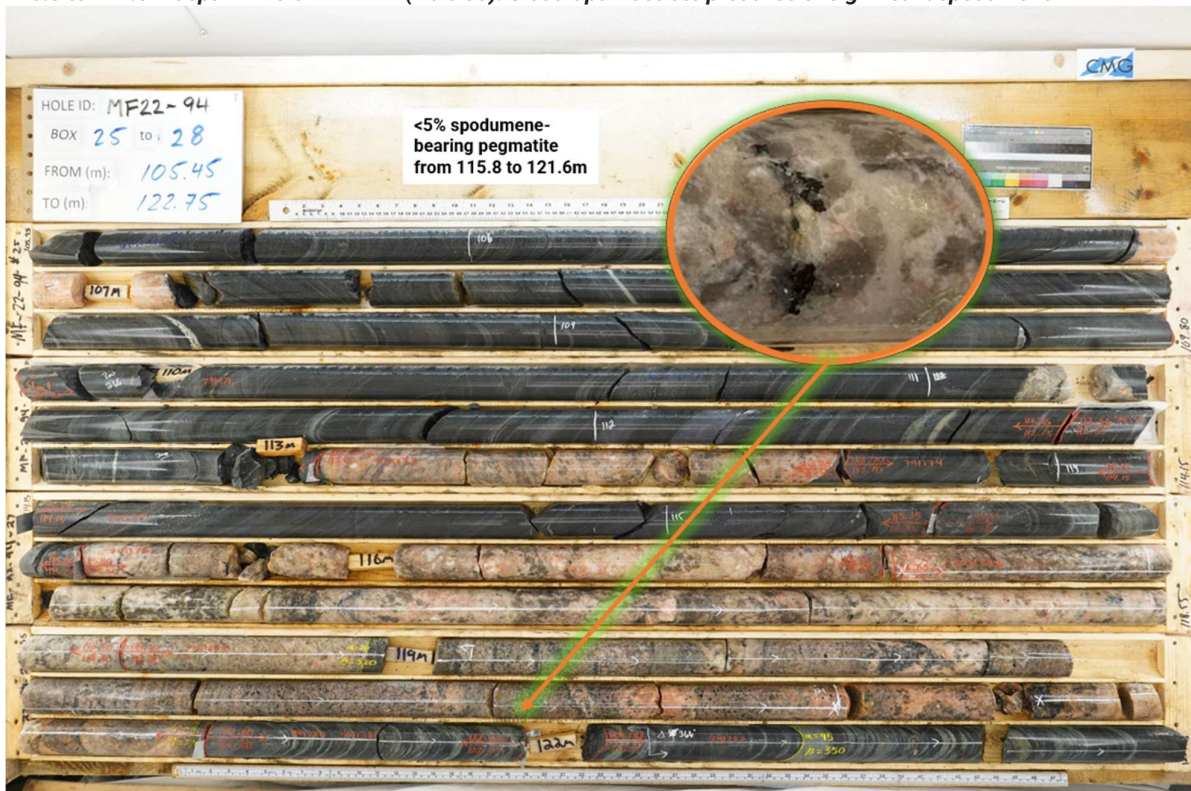

**Figure 7: Cross-section, looking west, of Pegmatite 6 (pink shape) with previous drill hole traces (grey) and recently drilled holes of MF22-91, MF22-93, MF22-94, MF22-95, and MF22-96 (note: measurement in metres)**

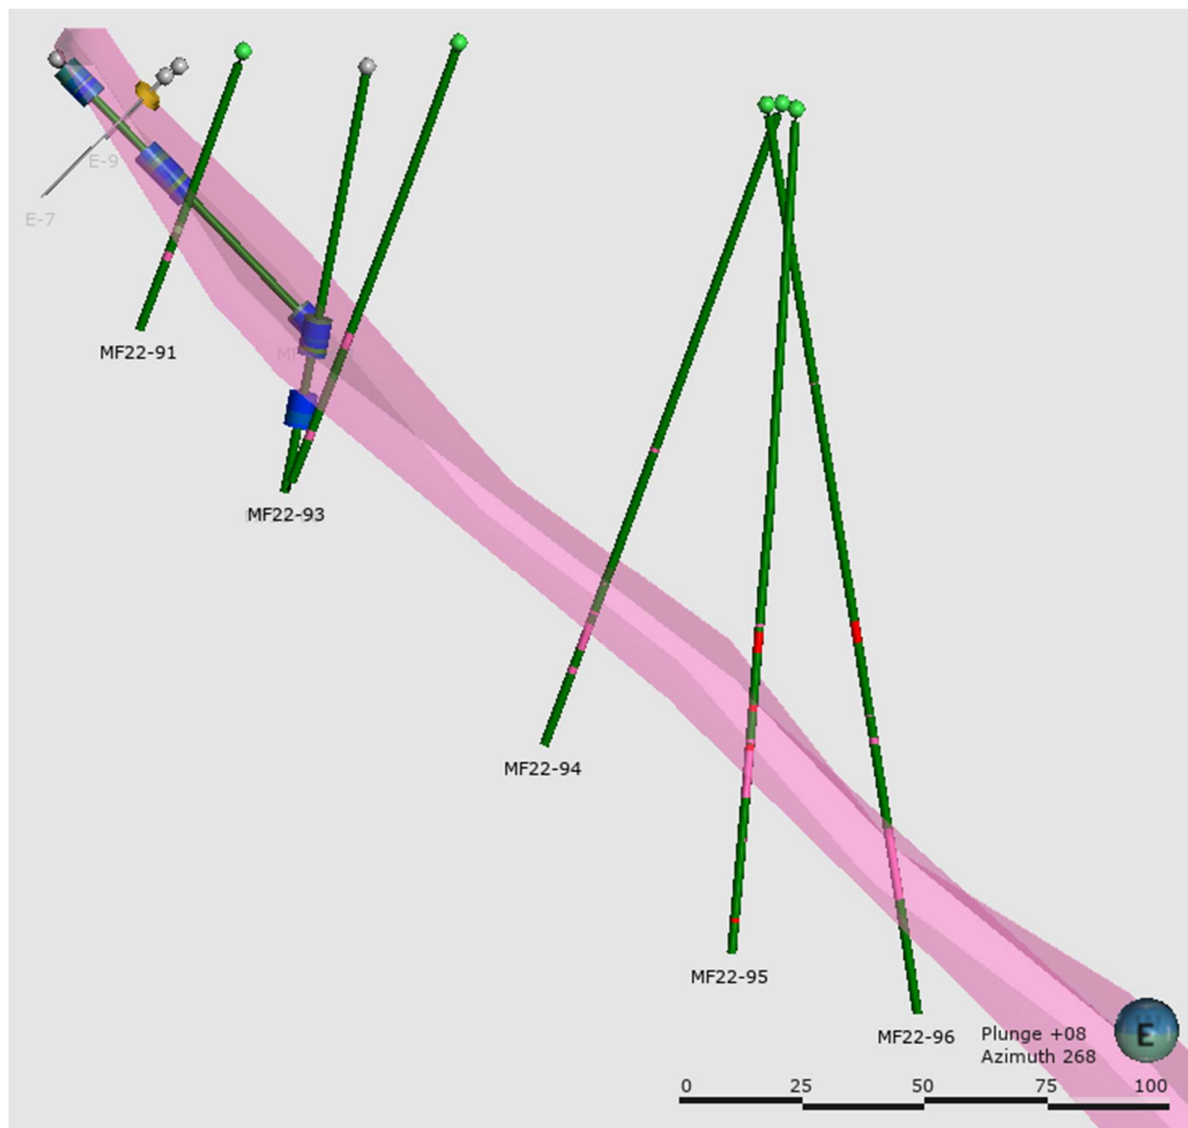

**Figure 8: Cross-section, looking west, of Pegmatite 6 (pink shape) with previous drill hole traces (grey) and recently drilled holes of MF22-92 (note: measurement in metres)**

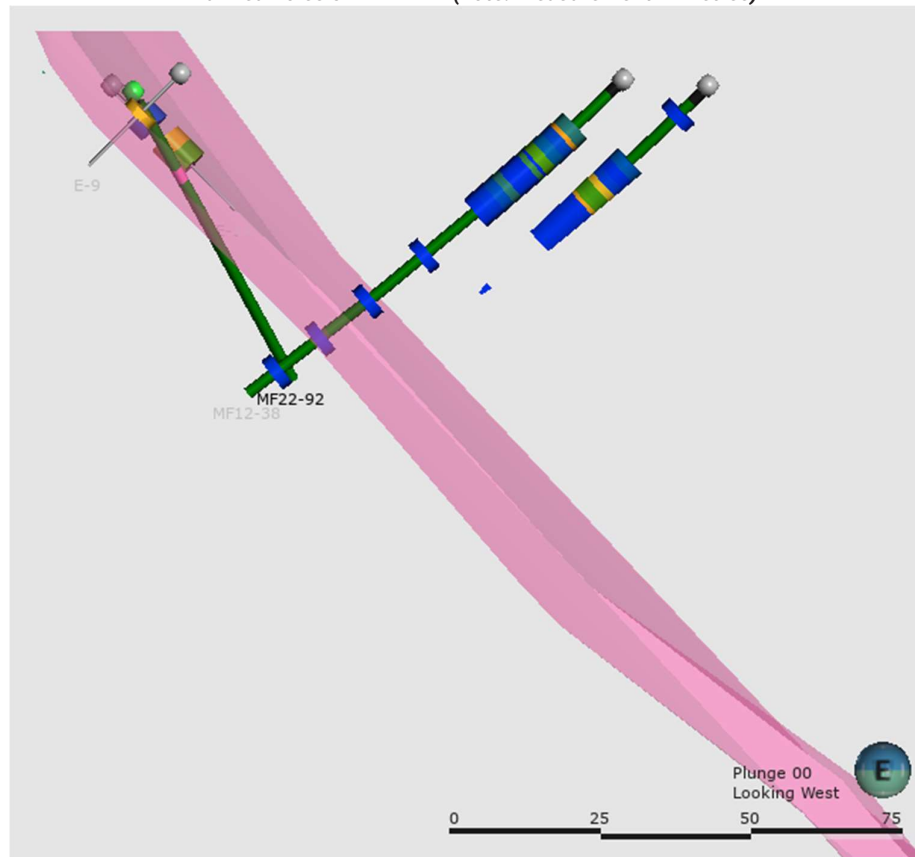

**Legend**

- Drill Collar Locations
- Historic Collars
- Phase 1 Planned Drill Collars
- Phase 2 Planned Drill Collars
- DOH Traces
- Surface Expressions of Pignattis

**Mavis Lake - 2022 Collar Locations**

Spatial Reference  
Name: WGS 1984 UTM Zone 15N

Scale: 1:3,000


0 0.05 0.1 0.2 0.3 0.4 Kilometers

Sources: Erik Alward D.S., USGS, NOAA, NADP CORNER PROJECTS, IBCAT, N.C. CO. NADA, Geospatial Data, Environmental Canada, Canada's E.P.A., Watermark and the GIS user community; Esri Community Maps, Control Bots, Province of Ontario, Province of Manitoba, East Canada, East HSE, Gamma, Subgraph, GeoTechnology Inc., MapInfo, USA, USGS, EPA, US Census Bureau, USDA, NRCan, Parks Canada.

The inaugural 5,000m drill program successfully intersected significant spodumene-bearing pegmatite in the Mavis Lake south zone area which has expanded continuity of mineralisation and increased the strike length and depth of the Pegmatite 6. With approvals now received for an additional 5,000m of drilling, the Company is now undergoing strategic analysis in consultation with SRK for the proposed Phase 2 drilling campaign.



**Figure 10: Mavis Lake Permitted Drill Pad Locations. Note some of the drill pads have been used in the first phase of drilling**

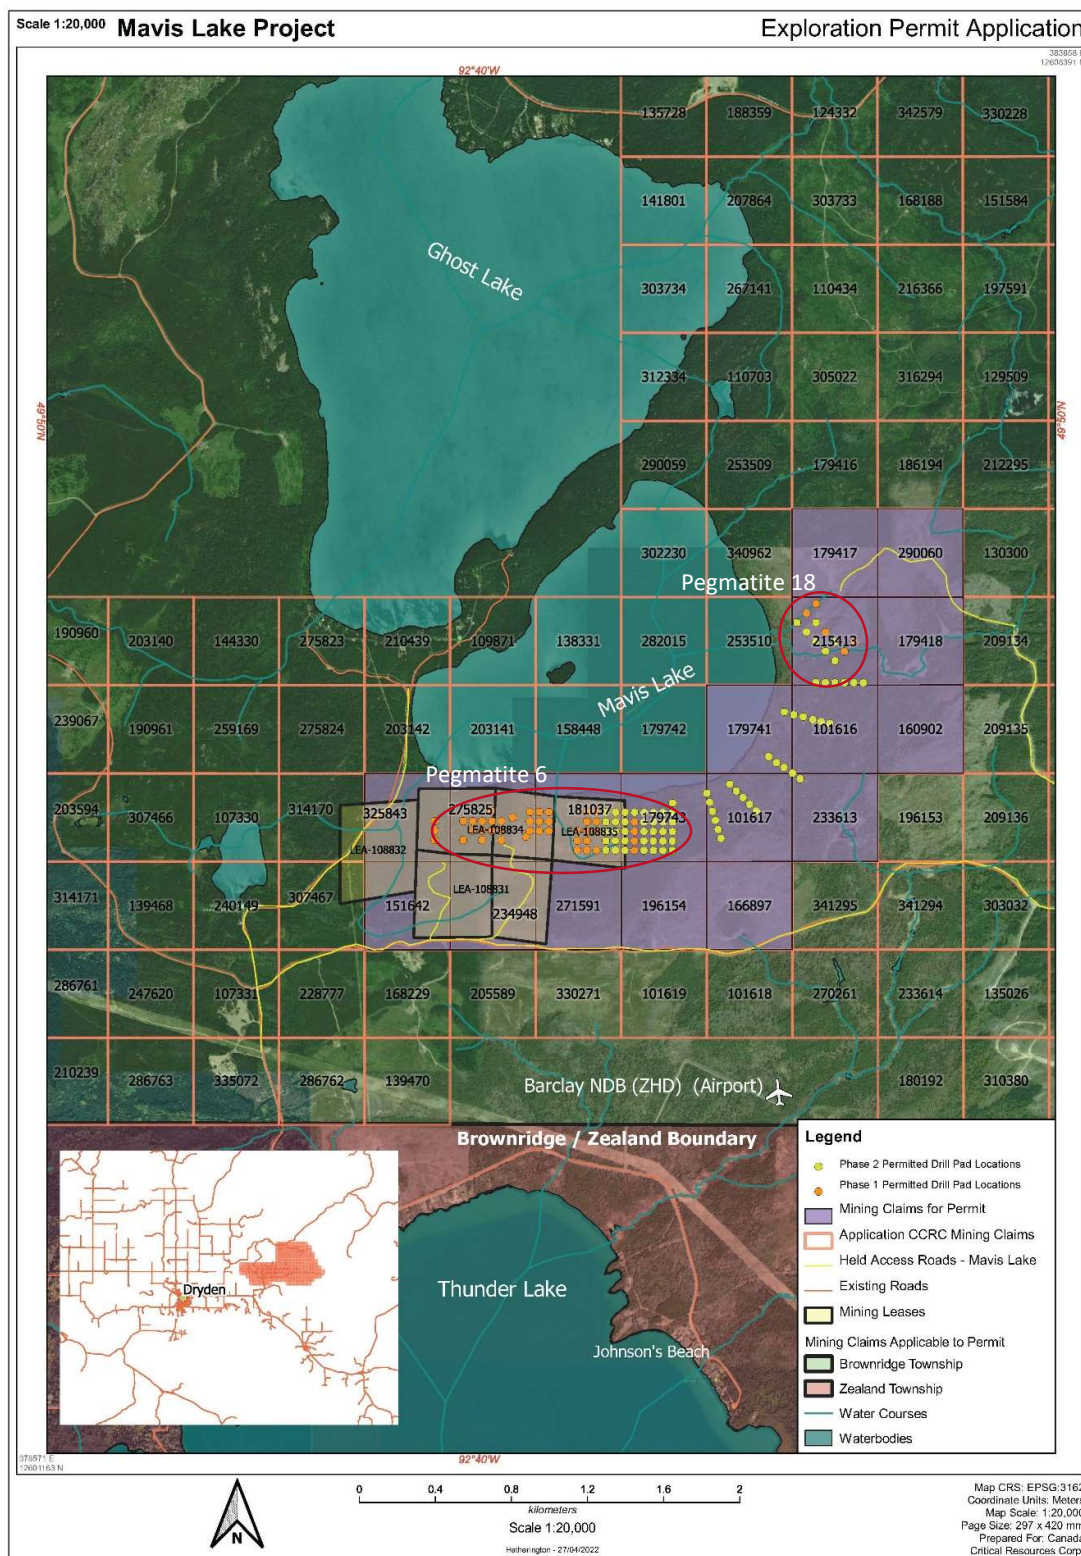

### Mavis Lake Project Description


The Mavis Lake Lithium Project is 19 kilometres east of the town of Dryden, Ontario. The Project is in close vicinity to the Trans-Canada highway and railway major transportation arteries linking larger cities such as Thunder Bay, Ontario, to the southeast and Winnipeg, Manitoba, to the west. The region boasts excellent infrastructure with hydro-power located a few kilometres to the south-west of the project. The region is a well-established lithium province with multiple projects located within the vicinity.

Previous drill programs have yielded high-grade  $\text{Li}_2\text{O}$  intercepts including:

- 55.25m at 1.04%  $\text{Li}_2\text{O}$  from 80.75m in drill hole MF18-53 and
- 26.30m at 1.70%  $\text{Li}_2\text{O}$  from 111.9m inc. 7.70m at 2.97%  $\text{Li}_2\text{O}$  from 130.5m in drill hole MF17-491.


These results present significant exploration potential, a summary of previous results can be seen in ASX announcement dated 25 October 2021.

**Figure 11: Sample of Mavis Lake intersections from 2017 and 2018 drilling campaign**

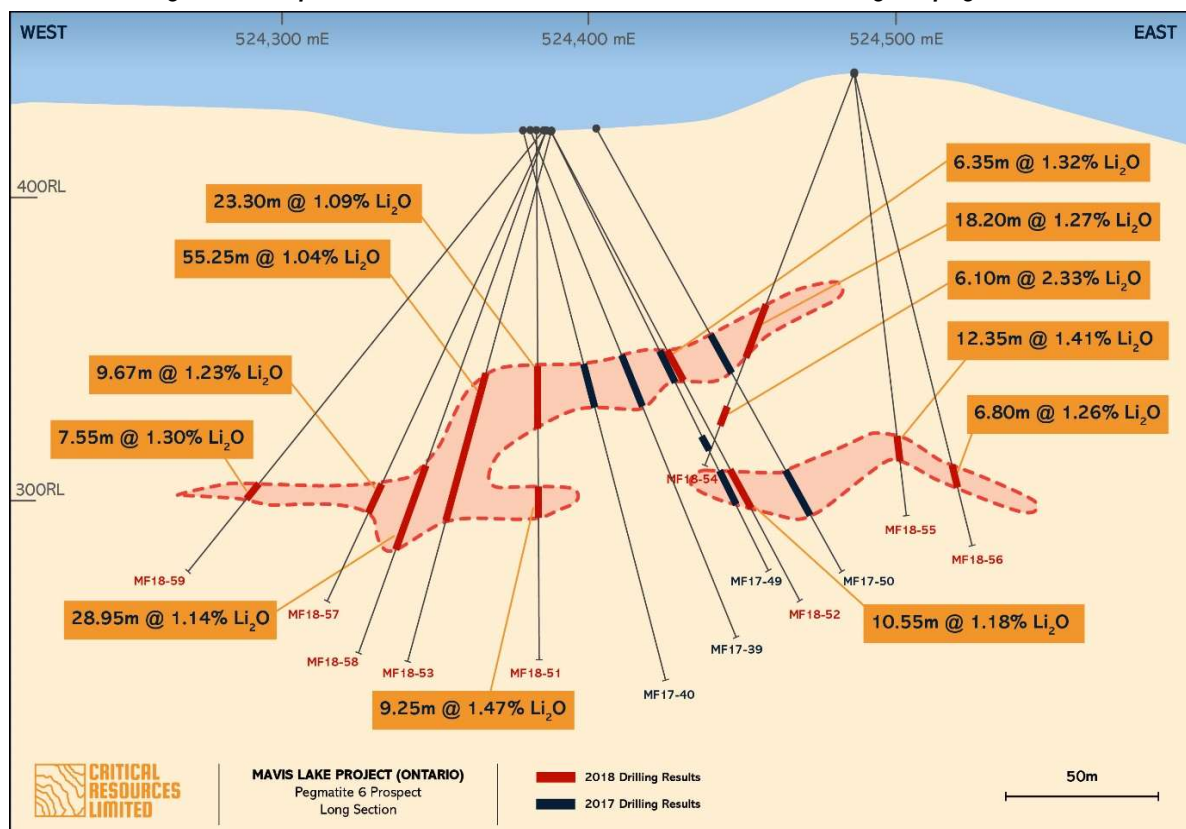



**Figure 12: Mavis Lake project location**

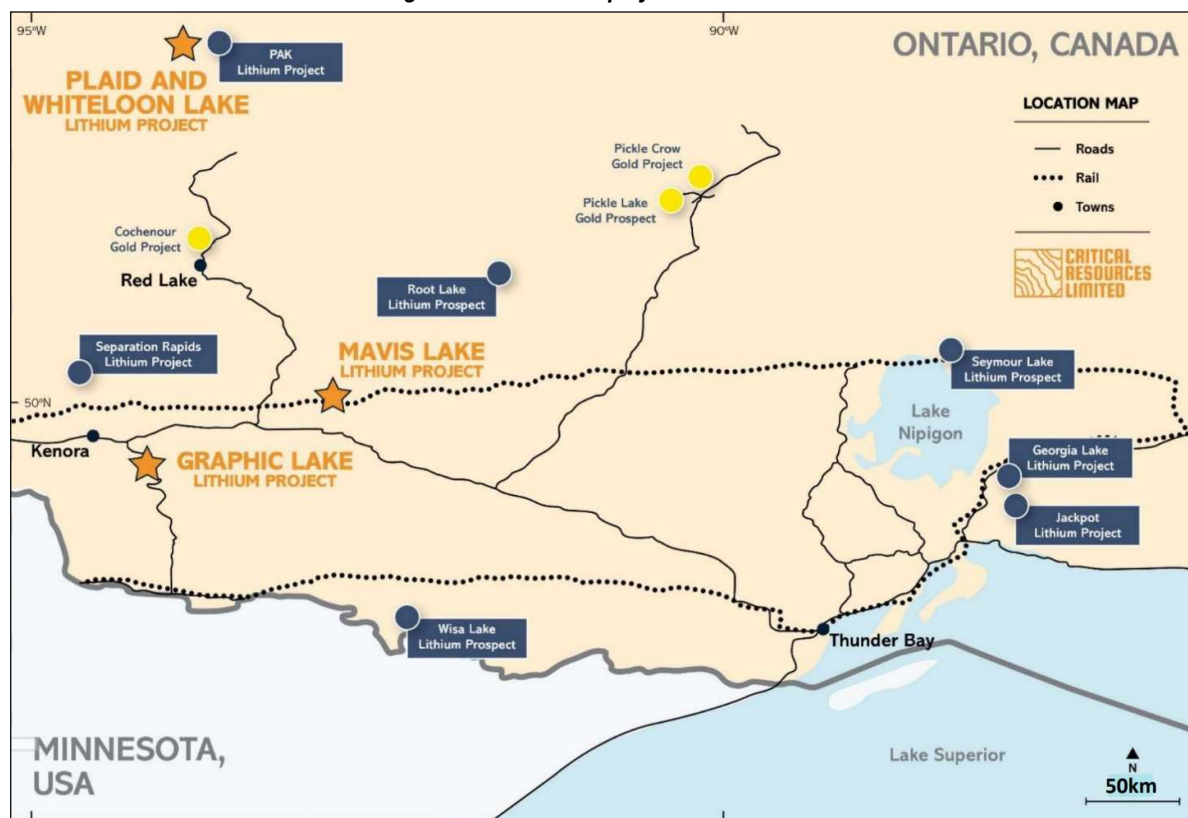

### Deposit Type and Exploration Thesis


Previous exploration campaigns at Mavis Lake have confirmed the presence of lithium-bearing pegmatites.

The pegmatite occurrences at Mavis Lake are found within the correct zonation for lithium enrichment from the Ghost Lake Batholith, a fertile granite intrusion. The zonation of pegmatite occurrences can be seen in Figure 13.

The recently conducted airborne survey (see ASX announcement 01 February 2022) demonstrated the potential continuity of geological trends between Pegmatite 6 and Pegmatite 18. This potential continuity represents new areas of interest for the company that have since been investigated via surface mapping and sampling, assisting to identify new drill targets. Any proposed follow up drilling will test targets and expand on the pegmatites continuity.



Figure 13: Regional zonation of Mavis Lake Pegmatite group

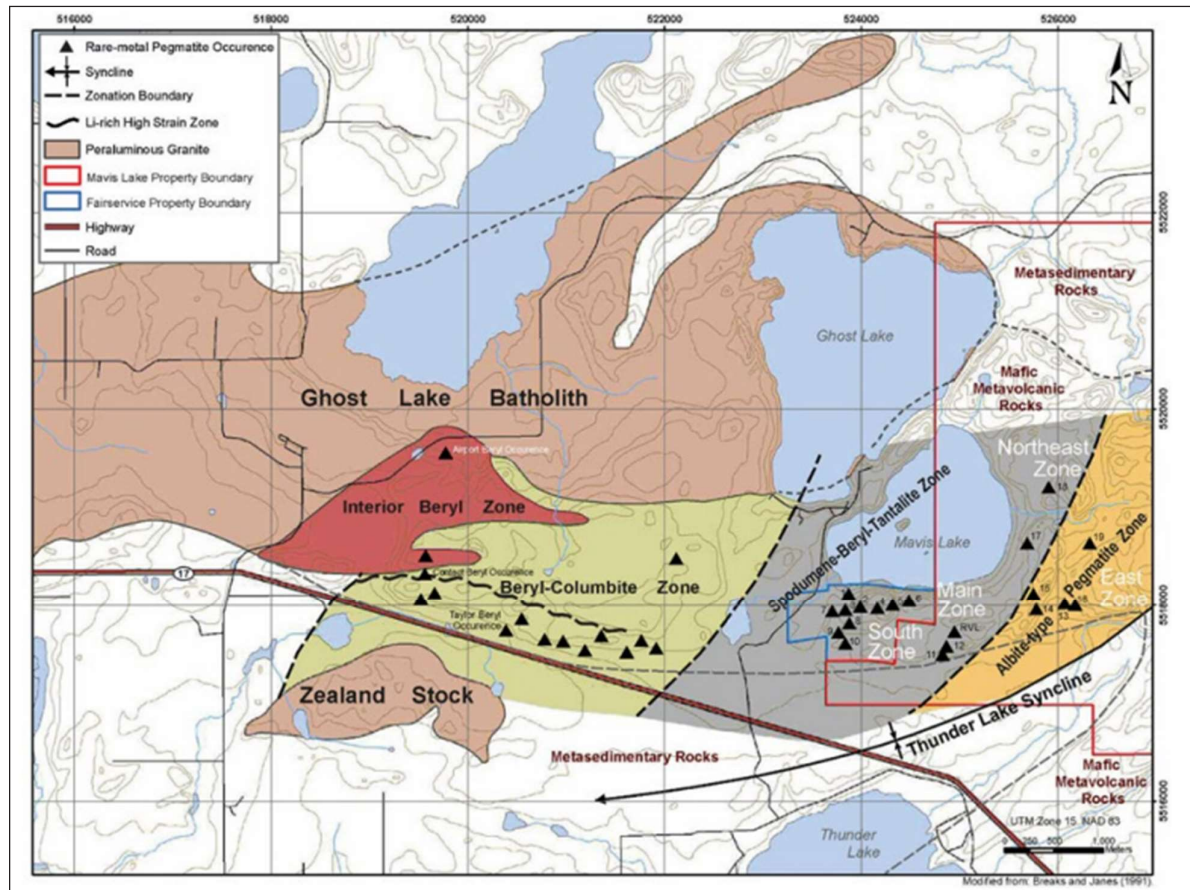

Sources: Demmeier and Mercier (2011), modified from Brex and James (1991)

## The Lithium Industry in Ontario

### Canadian Government's C\$3.8 Billion Critical Minerals Strategy

Recently announced strategy by the Canadian government to boost domestic production of lithium, copper and other strategic minerals to help propel the country's efforts to become a key part of the global electric vehicle supply chain. The spending, announced during Canada's federal budget unveiling on 7 April 22, promises grants for mineral surveying, processing, and recycling, as well as tax credits for the development of new mines and subsidies for infrastructure.

### Ontario's First-Ever Critical Mineral Strategy

In March of 2022 the government of Ontario announced their first-ever critical minerals strategy. The strategy aims to secure Ontario's position as a global leader of responsibly sourced critical minerals. To achieve this, collaboration is dependent between government, industry, Indigenous peoples, communities, and other stakeholders. Working together, this strategy will build a stronger, more resilient economy and revitalise local communities. The strategy is comprised of six pillars, or areas of government action, which will solidify Ontario's position as a global leader of responsibly sourced critical minerals. The pillars are; Enhancing geoscience information and supporting critical minerals exploration, Growing Domestic processing and creating resilient supply chains, Improving Ontario's regulatory framework, Investing in innovation, research, and development, Building economic development opportunities with Indigenous partners, and Growing labour supply and developing a skilled labour force.

#### *Tesla Battery Gear Manufacturing Plant Opens*

Tesla has recently announced the opening of a battery gear manufacturing plant in Markham, Ontario demonstrating the significant opportunity for Ontario to become one of the world's leading lithium provinces. The facility will be the first branded Tesla Canada manufacturing facility in Canada. A significant amount of activity in the lithium exploration sector is currently occurring in Ontario. Due to the quality of lithium assets in the region, the fundamental drivers behind the lithium market and the intent of North American manufacturers to source lithium for battery manufacturing from localised supply-chains, it is an excellent time to be gaining a foothold in Ontario.

#### *Thunder Bay Regional Lithium Refinery*

Avalon Advanced Materials Inc (TSX:AVL) has recently announced the agreement of a binding letter of intent to develop a regional battery supply chain in Ontario and elsewhere. The first step of this development will be establishing a lithium refinery in Thunder Bay, Ontario, approximately 350km from the Mavis Lake Lithium Project. The plant aims for a production capacity of 20,000 tonnes per annum of lithium hydroxide and/or lithium carbonate. Sources of lithium concentrate will be initially from Avalon's Separation Rapids Lithium Project while other projects begin production.

**This announcement has been approved for release by the Board of Directors.**

-End-

#### **EXPLORATION WORK – COMPETENT PERSONS STATEMENT**

The information in this ASX Announcement that relates to Exploration Results is based on information compiled by Troy Gallik (P. Geo), a Competent Person who is a Member of the Association of Professional Geoscientists of Ontario. Troy Gallik is a full-time employee of Critical Resources Ltd. Troy Gallik has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Troy Gallik consents to the inclusion in this ASX Announcement of the matters based on his information in the form and context in which it appears.

#### **FORWARD LOOKING STATEMENTS**

Information included in this release constitutes forward-looking statements. Often, but not always, forward looking statements can generally be identified by the use of forward looking words such as "may", "will", "expect", "intend", "plan", "estimate", "anticipate", "continue", and "guidance", or other similar words and may include, without limitation, statements regarding plans, strategies and objectives of management, anticipated production or construction commencement dates and expected costs or production outputs.

Forward looking statements inherently involve known and unknown risks, uncertainties and other factors that may cause the Company's actual results, performance and achievements to differ materially from any future results, performance or achievements. Relevant factors may include, but are not limited to, changes in commodity prices, foreign exchange fluctuations and general economic conditions, increased costs and demand for production inputs, the speculative nature of exploration and project development, including the risks of obtaining necessary licences and permits and diminishing quantities or grades of reserves, political and social risks, changes to the regulatory framework within which the Company operates or may in the future operate, environmental conditions including extreme weather conditions, recruitment and retention of personnel, industrial relations issues and litigation.

Forward looking statements are based on the Company and its management's good faith assumptions relating to the financial, market, regulatory and other relevant environments that will exist and affect the Company's business and operations in the future. The Company does not give any assurance that the assumptions on which forward looking statements are based will prove to be correct, or that the Company's business or operations will not be affected in any material manner by these or other factors not foreseen or foreseeable by the Company or management or beyond the Company's control.

Although the Company attempts and has attempted to identify factors that would cause actual actions, events or results to differ materially from those disclosed in forward looking statements, there may be other factors that could cause actual results, performance, achievements or events not to be as anticipated, estimated or intended, and many events are beyond the reasonable control of the Company. Accordingly, readers are cautioned not to place undue reliance on forward looking statements. Forward looking statements in these materials speak only at the date of issue. Subject to any continuing obligations under applicable law or any relevant stock exchange listing rules, in providing this information the Company does not undertake any obligation to publicly update or revise any of forward-looking statements or to advise of any change in events, conditions or circumstances on which any such statement is based.

#### **NO NEW INFORMATION**

Except where explicitly stated, this announcement contains references to prior exploration results, all of which have been cross-referenced to previous market announcements made by the Company. The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcements.

#### **ABOUT CRITICAL RESOURCES LIMITED**

Critical Resources is a base metals and lithium exploration and development focused company headquartered in Perth, Western Australia and is listed on the Australian Securities Exchange (ASX:CRR). The Company has recently been undergoing a structured process of change at the Director and Executive level. These changes mark the commencement of a renewed focus by the Company on providing shareholder value through the exploration, development and advancement of the Company's long held NSW assets, its newly acquired Lithium assets in Canada and also of its Copper assets in Oman.



# Appendix 1: JORC Table 1 – MF22-92, MF22-93, MF22-94, MF22-95, and MF22-96 Exploration Results

## 1.1 Section 1: Sampling Techniques and Data (Criteria in this section apply to all succeeding sections.)

Criteria	JORC-Code Explanation	Commentary
<b>Sampling techniques</b>	<i>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i>	<ul style="list-style-type: none"> <li>• Oriented NQ core was cut in half using a diamond saw, with a half core sent for assay and half core retained.</li> <li>• No other measurement tools other than directional survey tools have been used in the holes at this stage.</li> </ul>
	<i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i>	<ul style="list-style-type: none"> <li>• Oriented core was placed V-rail and a consistent cut-line drawn along core to ensure cutting (halving) of representative samples</li> </ul>
	<i>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.</i>	<ul style="list-style-type: none"> <li>• Core sample interval was based in logged mineralisation</li> <li>• Determination of mineralisation has been based on geological logging and photo analysis.</li> <li>• Diamond Core drilling was used to obtain 3m length samples from the barrel which are then marked in one metre intervals based on the drillers core block measurement.</li> <li>• Assay samples will be selected based on geological logging boundaries or on the nominal metre marks.</li> <li>• Samples will be dispatched to an accredited laboratory (ActLabs) in Dryden, Ontario, Canada for sample preparation and shipment to analysis</li> </ul>
<b>Drilling techniques</b>	<i>Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i>	<ul style="list-style-type: none"> <li>• NQ2 diamond double tube coring by Cyr EF-50 rig was used throughout the hole.</li> <li>• Core orientation was carried out by the drilling contractor.</li> </ul>

Criteria	JORC-Code Explanation	Commentary
<b>Drill sample recovery</b>	<i>Method of recording and assessing core and chip sample recoveries and results assessed.</i>	<ul style="list-style-type: none"> <li>• Lithological logging, photography</li> <li>• Core samples were measured with a standard tape within the core trays. Length of core was then compared to the interval drilled, and any core loss was attributed to individual rock units based on the amount of fracturing, abrasion of core contacts, and the conservative judgment of the core logger. Results of core loss are discussed below.</li> <li>• Experienced driller contracted to carry out drilling.</li> <li>• In broken ground the driller produced NQ core from short runs to maximise core recovery.</li> <li>• Core was washed before placing in the core trays.</li> <li>• Core was visually assessed by professional geologists before cutting to ensure representative sampling.</li> <li>• See “Aspects of the determination of mineralisation that are Material to the Public Report” above.</li> </ul>
	<i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i>	
	<i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	
<b>Logging</b>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</i>	<ul style="list-style-type: none"> <li>• Core samples were not geotechnically logged.</li> <li>• Core samples have been geologically logged to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>• The core logging was qualitative in nature.</li> <li>• All core was photographed</li> <li>• Total length of the MF22-92 was 62m 100% of the relevant intersections were logged.</li> <li>• Total length of the MF22-93 was 100m 100% of the relevant intersections were logged.</li> <li>• Total length of the MF22-94 was 143m 100% of the relevant intersections were logged</li> <li>• Total length of the MF22-95 was 173m 100% of the relevant intersections were logged</li> <li>• Total length of the MF22-96 was 191m 100% of the relevant intersections were logged</li> </ul>
	<i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i>	
	<i>The total length and percentage of the relevant intersections logged.</i>	
<b>Sub-sampling techniques and sample preparation</b>	<i>If core, whether cut or sawn and whether quarter, half or all core taken.</i>	<ul style="list-style-type: none"> <li>• No sampling completed at this stage</li> </ul>
	<i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i>	
	<i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i>	
	<i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i>	

Criteria	JORC-Code Explanation	Commentary
	<p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	
<b>Quality of assay data and laboratory tests</b>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e., lack of bias) and precision have been established.</i></p>	<ul style="list-style-type: none"> <li>• No assays have been conducted for this drill program. Techniques will be updated when assays are completed.</li> </ul>
<b>Verification of sampling and assaying</b>	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<ul style="list-style-type: none"> <li>• No independent verification completed at this stage</li> <li>• No holes are twins of previous holes</li> <li>• Core measured, photographed and logged by geologists. Digitally recorded plus back-up records.</li> <li>• No assay data received at this stage</li> </ul>
<b>Location of data points</b>	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<ul style="list-style-type: none"> <li>• Drill collars recorded with Garmin GPS that has an accuracy in the order of <math>\pm 3</math> metres for location. A registered surveyor will be contracted to accurately survey all drill collars at completed of drill program.</li> <li>• WGS 1984 UTM Zone 15N</li> <li>• No specific topography survey has been completed over the project area</li> </ul>
<b>Data spacing and distribution</b>	<i>Data spacing for reporting of Exploration Results.</i>	



Criteria	JORC-Code Explanation	Commentary
	<i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i>	<ul style="list-style-type: none"> <li>• Not relevant to current drilling.</li> <li>• Not relevant to current drilling.</li> <li>• No sample compositing has been applied.</li> </ul>
	<i>Whether sample compositing has been applied.</i>	
<b>Orientation of data in relation to geological structure</b>	<i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i>	
	<i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<ul style="list-style-type: none"> <li>• The orientation of the mineralisation is unknown. The drilling program is aimed at determining orientation of the mineralisation.</li> <li>• It is uncertain whether sampling bias has been introduced, or whether the thickness drilled is a true thickness.</li> </ul>
<b>Sample security</b>	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> <li>• Core samples will be stored the Dryden core yard before delivery to ActLabsGroups in Dryden, Ontario for analysis.</li> </ul>
<b>Audits or reviews</b>	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> <li>• Not undertaken at this stage</li> </ul>

## 1 Section 2: Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC-Code Explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i>	<ul style="list-style-type: none"> <li>• The Mavis Lake Lithium Project consists of 189 unpatented Single Cell Mining Claims and six separate surface leases which secure the surface rights of the land required for the Project footprint.</li> <li>• All claims and leases are active and in good standing. The leases have a term of 21 years and are not set to expire until 2032, at which time they can be renewed for an additional 21 years if required.</li> </ul>
	<i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i>	

Criteria	JORC-Code Explanation	Commentary																																										
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"><li>• Previous exploration has been conducted by a number of parties including Lun-Echo Gold Mines Limited (1956), Selco Mining Corporation (1979-1980), Tantalum Mining Corporation of Canada Limited (1981-1982), Emerald Field Resources (2002), International Lithium Corp (2006-2021) and Pioneer Resources Limited/Essential Metals Limited (2018-2021).</li></ul>																																										
Geology	Deposit type, geological setting, and style of mineralisation.	<ul style="list-style-type: none"><li>• The Fairservice and Mavis Lake Prospects host zoned pegmatites that are prospective for lithium and tantalum</li></ul>																																										
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <p>easting and northing of the drill hole collar</p> <p>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</p> <p>dip and azimuth of the hole</p> <p>down hole length and interception depth</p> <p>hole length.</p> <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the</p>	<table><tr><th>Hole ID</th><th>Easting</th><th>Northing</th><th>RL</th><th>Azimuth</th><th>Dip</th><th>To Depth</th></tr><tr><td>MF22-92</td><td>523913</td><td>5517927</td><td>430</td><td>310</td><td>-50</td><td>62</td></tr><tr><td>MF22-93</td><td>523951</td><td>5517993</td><td>442</td><td>190</td><td>-70</td><td>100</td></tr><tr><td>MF22-94</td><td>523952</td><td>5518059</td><td>430</td><td>190.1</td><td>-70</td><td>143</td></tr><tr><td>MF22-95</td><td>523953</td><td>5518059</td><td>430</td><td>109.8</td><td>-82</td><td>173</td></tr><tr><td>MF22-96</td><td>523954</td><td>5518062</td><td>429</td><td>344.8</td><td>-79.7</td><td>191</td></tr></table>	Hole ID	Easting	Northing	RL	Azimuth	Dip	To Depth	MF22-92	523913	5517927	430	310	-50	62	MF22-93	523951	5517993	442	190	-70	100	MF22-94	523952	5518059	430	190.1	-70	143	MF22-95	523953	5518059	430	109.8	-82	173	MF22-96	523954	5518062	429	344.8	-79.7	191
Hole ID	Easting	Northing	RL	Azimuth	Dip	To Depth																																						
MF22-92	523913	5517927	430	310	-50	62																																						
MF22-93	523951	5517993	442	190	-70	100																																						
MF22-94	523952	5518059	430	190.1	-70	143																																						
MF22-95	523953	5518059	430	109.8	-82	173																																						
MF22-96	523954	5518062	429	344.8	-79.7	191																																						

Criteria	JORC-Code Explanation	Commentary
	<i>Competent Person should clearly explain why this is the case.</i>	<ul style="list-style-type: none"> <li>• Not relevant</li> </ul>
<b>Data aggregation methods</b>	<i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated.</i>	<ul style="list-style-type: none"> <li>• Uncut</li> </ul>
	<i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i>	<ul style="list-style-type: none"> <li>• All aggregate intercepts detailed on tables are weighted averages.</li> </ul>
	<i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i>	<ul style="list-style-type: none"> <li>• None used</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<i>These relationships are particularly important in the reporting of Exploration Results.</i>	<ul style="list-style-type: none"> <li>• True width not currently known. All lengths are down-hole lengths and not true width.</li> </ul>
	<i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i>	<ul style="list-style-type: none"> <li>• The precise geometry is not currently known but is being tested by the planned drilling, with diamond drill hole azimuths designed to drill normal to the interpreted mineralised structure.</li> </ul>
	<i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').</i>	<ul style="list-style-type: none"> <li>• Down-hole length reported, true width not known.</li> </ul>
<b>Diagrams</b>	<i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	<ul style="list-style-type: none"> <li>• The drilling is aimed at clarifying the structure of the mineralisation.</li> </ul>



Criteria	JORC-Code Explanation	Commentary
<b>Balanced reporting</b>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	<ul style="list-style-type: none"> <li>• Representative reporting of all relevant grades is provided in tables to avoid misleading reporting of Exploration Results.</li> </ul>
<b>Other substantive exploration data</b>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	<ul style="list-style-type: none"> <li>• Overview of exploration data leading to selection of drill targets provided.</li> <li>• There were no deleterious elements identified.</li> </ul>
<b>Further work</b>	<i>The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).</i>	<ul style="list-style-type: none"> <li>• Drill program of 49 holes for a total of 5,000m to confirm, infill and extend previous drilling conducted by various parties.</li> </ul>