

EXTENSIVE COPPER ASSAYS HIGHLIGHT ICHUCOLLO AS NEW SIGNIFICANT DRILL TARGET

HIGHLIGHTS

- Channel sample results from Ichucollo targetat the Picha Project include:
 - ▶ 12m @ 1.1% Cu and 5.3g/t Ag;
 - ▶ 30m @ 0.79% Cu and 7.56g/t Ag;
 - 16m @ 0.60% Cu and 9.1g/t Ag; and
 - ▶ 18m long zone of stratabound or "manto-type" mineralisation averaging 1.45% Cu
- Channel sampling results highlight an area over **350m** in extent with significant copper mineralisation and open to the north and south
- Evidence of intrusive activity in the Ichucollo area in the form of magmatic breccias with intrusive clasts – suggests proximity to porphyry body
- Ground geophysics comprising IP/Resistivity survey planned for Ichucollo in August and further surface sampling and mapping
- High grade rock chip sample of 6.78% Cu and 25g/t Ag indicates a potential new target area 4.5km west of Cobremani
- Phase one maiden diamond drilling program at Cumbre Coya, Maricate, Fundicion and Cobremani targets planned to commence in October



Figure 1: Sampling "manto-type" mineralisation at Ichucollo

ACN 076 390 451



Valor Resources Limited ("Valor" or the "Company") is pleased to announce the results of rock chip samples from the Ichucollo target at the Company's Picha Project in southern Peru. A total of 113 channel and selective rock chip samples have been collected at Ichucollo between April and May this year, and assay results have now been received. Further sampling was undertaken at Ichucollo following assay results reported in the Company's ASX announcement dated 3rd June titled "*Significant Cu-Ag results over 2% copper and up to 929g/t silver*". The significant assay results (>0.5% Cu) from the Ichucollo area are shown in Table 1 and details of all sampling are provided in Appendix 1 below.

Of the 113 samples taken at Ichucollo, 32 assayed >0.5% Cu, all of which were channel samples, with individual channel samples up to **7.75% Cu and 99g/t Ag**. Mineralisation is mostly associated with argillic altered andesitic volcanics (stratabound style) however there is potential for a porphyry at depth within this target area (see Figure 3 below). Many of the samples had elevated molybdenum (above 20ppm and up to 412ppm) providing further evidence for a potential porphyry copper mineralising system within the project area.

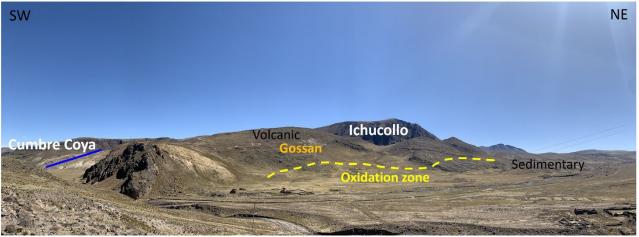


Figure 2: View looking northwest towards the Ichucollo target.

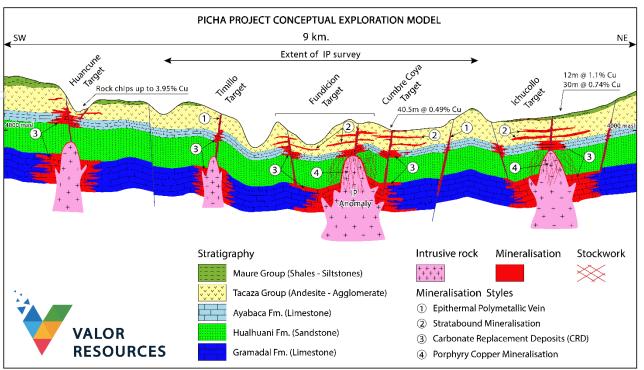


Figure 3: Picha Project Conceptual Exploration model



Executive Chairman George Bauk said "The latest assay results again demonstrate the untested potential of the Picha Project with widespread copper mineralisation discovered across the new Ichucollo target area. The evidence continues to mount that we have an exceptional project with large scale porphyry copper potential. Approvals for the maiden drilling program at Picha continue to advance with the current expectation that drilling will commence in October. Due to the timing of the approvals process, the maiden drilling program will not include Ichucollo, but following the ground geophysics survey there in August, we expect to be drill testing this exciting new target early next year."

"The Picha Project has to date identified seven targets, each with their own merits that all warrant drilling. The new Ichucollo target is developing into the best target we have and we will now invest in the IP / Resistivity survey and will continue with ground work to develop the target further. Several analogues have been drawn with the San Gabriel deposit located within 7km of the southwest corner of our tenement holding and along a regional fault structure."

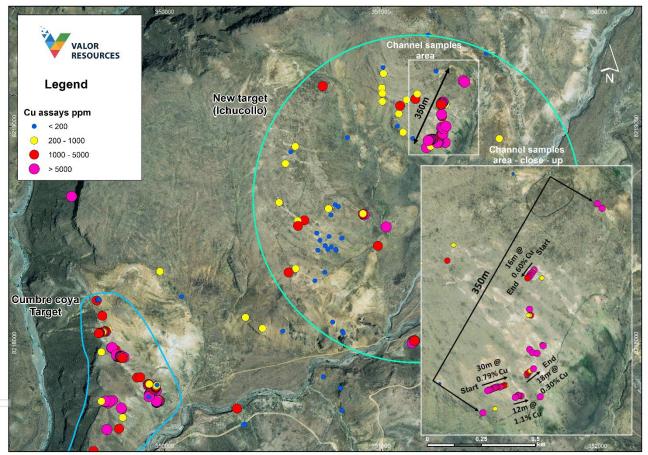


Figure 4: Ichucollo channel sample assay results

Ichucollo surface sampling results

The Ichucollo target is located just 1km east of the Cumbre Coya drill target (see Figure 4) and has been the focus of surface sampling and mapping in the last three months. Another 113 samples have been collected and assay results have been received since the Company's ASX announcement dated 3rd June regarding the initial sampling at Ichucollo. Assay results have been received for a total of 104 channel samples and 9 selective rock chip samples, full details of the which are provided in Appendix 1. The most significant assay results (>0.5% Cu) are summarised in Table 1 below.

The selective rock chip samples have a high potential for bias and should not be considered as being representative of the overall mineralised structure or zone.



Table 1: Picha project – Ichucollo target: Significant assay results (>0.5% Cu) and sample locations

				GS84 UTM Zone Dimensions	Ag	Cu	Мо	Pb	Zn
ample Id	Sample type	Northing	Easting	(m)	(g/t)	(%)	ppm	(ppm)	(ppm
000524	Channel	8218536	351023	0.35x0.20	22.5	7.75	81.84	2605	3634
000553	Channel	8218009	351151	0.70x0.20	5.6	1.73	21.86	831.6	1624
000554	Channel	8218008	351149	0.8.x0.20	6.12	1.54	20.42	701.2	115
000555	Channel	8218006	351148	0.60x0.20	8.52	0.79	65.66	608.4	1629
000556	Channel	8218005	351147	0.70x0.20	6.57	1.10	52.97	1279	289
000558	Channel	8218003	351145	0.80x0.20	6.01	1.92	36.35	627.4	229
000559	Channel	8218002	351144	0.70x0.20	5.31	2.15	51.45	876	232
000560	Channel	8218000	351144	0.70x0.20	9.35	1.44	38.65	2018	175
000561	Channel	8218010	351153	0.55x0.20	5.99	1.42	31.99	502.7	104
000579	Channel	8218901	351210	2.00x0.20	14.9	1.62	12.74	195.7	272
000584	Channel	8219054	351279	2.00x0.20	0.28	0.65	2.09	24.9	122
000585	Channel	8219112	351286	2.00X0.20	2.58	1.69	2.53	45.5	223
000586	Channel	8218926	351266	2.00x0.20	10.1	2.18	12.44	350	86
000589	Channel	8218927	351262	2.00x0.20	5.98	0.82	13.68	192.4	114
000590	Channel	8218926	351261	2.00x0.20	3.69	0.93	5.59	1389	52
000592	Channel	8218924	351258	2.00x0.20	6.92	1.99	9.32	180.2	49
000600	Channel	8218939	351235	2.00x0.20	12.8	1.70	14.27	2108	374
000602	Channel	8218939	351230	2.00x0.20	32	2.81	27.13	4587	108
000604	Channel	8218938	351227	2.00x0.20	4.28	0.60	4.3	96.4	63
000605	Channel	8218937	351225	2.00x0.20	4.7	1.35	6.89	111	57
000610	Channel	8218934	351217	2.00x0.20	8.92	0.97	15.8	312.8	70
000613	Channel	8219108	351282	2.00x0.20	14	0.63	8.82	154.8	168
000614	Channel	8219106	351280	2.00x0.20	24.5	0.78	42.61	243.8	92
000615	Channel	8219104	351280	2.00x0.20	5.41	0.97	6.75	66.8	81
000618	Channel	8219101	351277	2.00x0.20	6.75	1.36	5.83	107.1	102
000622	Channel	8218959	351276	2.00x0.20	11.9	0.91	22.35	280.7	570
000629	Channel	8218966	351285	2.00x0.20	3.21	0.99	7.5	71.5	55!
000630	Channel	8218990	351283	2.00x0.20	4.62	1.33	9.55	130.6	493
000631	Channel	8218989	351290	2.00x0.20	2.19	1.05	5.9	60.4	42
000633	Channel	8219000	351299	2.00x0.20	2.24	0.57	4.89	56.2	483
000635	Channel	8219210	351379	0.70x0.20	99	5.95	347.71	12150	732
000636	Channel	8219203	351386	0.70x0.20	4.61	1.18	58.21	1335	360



The Ichucollo target is located northeast of the other confirmed drill targets at the Picha Project: Cobremani, Maricate, Fundicion and Cumbre Coya, all of which are located within the NE-SW trending structural corridor which extends towards the southwest and Buenaventura's 7.6Moz Au Eq San Gabriel Project.


The Ichucollo target has potential for epithermal polymetallic vein mineralisation, stratabound mineralisation and at depth, carbonate replacement deposits (CRD) and porphyry copper mineralisation. Figure 3 above shows the conceptual exploration model for the Picha Project and the various styles of mineralisation being targeted with the upcoming drill program.

New target area identified - Uturucuy

One selective rock chip sample was collected from an area located approximately 4.5km west of Cobremani (see Figure 5 below). The sample was of argillic altered andesitic volcanics and returned an assay of 6.78% Cu and 25g/t Ag. Selective rock chip samples have a high potential for bias and should not be considered as being representative of the overall mineralised structure or zone. Details of the sample are shown in Appendix 1 below. Follow-up sampling and mapping is planned for this area in the current quarter.

Proposed ground geophysics

As follow-up to the recent assay results from Ichucollo it is proposed to complete a ground Induced Polarisation/Resistivity survey over the target area. In addition to Ichucollo, the area covering the Huancune target area will also be included in the IP/Resistivity survey. This will extend the existing survey area as shown in Figure 5 below. The survey is expected to commence in August.

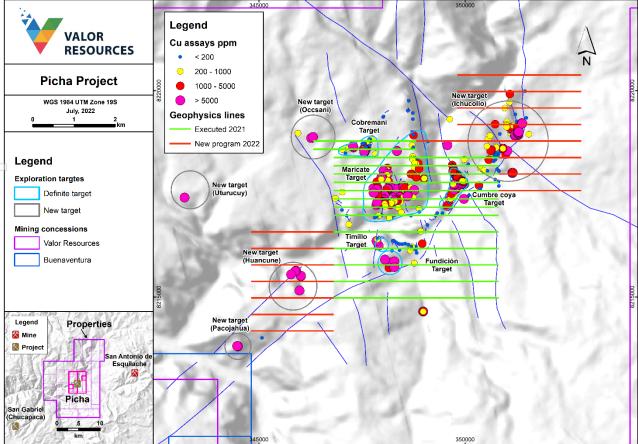



Next Steps Peru

Project Task	Target Date	Description
Ongoing mapping and surface sampling at Picha Project	August	Geological mapping and further channel sampling at Ichucollo Target
Ground Induced Polarisation/Resistivity survey at Picha Project	To commence in August	Focused on Ichucollo and Huancune targets
Maiden drilling program at Picha Project	October/November	Targeting Cumbre Coya, Cobremani, Maricate and Fundicion
Ongoing mapping and surface sampling at Charaque Project	August/September	Reconnaissance sampling and mapping at Arco and Huallatani targets

Next Steps Canada

Project Task	Target Date	Description
Cluff Lake Gravity Results	July	Interpretation and targeting
Hidden Bay Gravity Results and Historical data review	July/August	Review of all historical data including interpretation and targeting
Hook Lake Drilling Assay Results	August	Drill results from March Quarter drilling program
Hook Lake Gravity Results	August	Interpretation and targeting
Pendleton and MacPhersons Lake Historical data review	September	Review of all historical data including targeting
Smitty and Lorado Historical data review	September	Review of all historical data including targeting

COMPETENT PERSON STATEMENT

Information in this announcement, that relates to exploration results, is based on data compiled and reviewed by Mr. Gary Billingsley, a Non-Executive Director of Valor, who is a member of The Association of Professional Engineers and Geoscientists of Saskatchewan in Canada. Mr. Billingsley has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which they are undertaking to qualify as Competent Persons under the 2012 Edition of the Australasian Code for reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr. Billingsley consents to the inclusion of the data in the form and context in which it appears. The Company confirms that it is not aware of any new information or data that materially affects the information reported in the original market announcements and that all material assumptions and technical parameters underpinning the results in the relevant announcements continue to apply and have not materially changed. The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

This announcement has been authorised for release by the Board of Directors.

For further information, please contact

Mr George Bauk Executive Chairman Email: george@totode.com.au Phone: + 61 408 931 746

ASX : VAL



ABOUT VALOR RESOURCES


Valor Resources Limited (ASX:VAL) ("Valor" or "the Company") is an exploration company dedicated to creating shareholder value through acquisitions and exploration activities. The Company is focused on two key commodities, copper and uranium, as outlined below, in Peru and Canada.

Valor's 100% owned Peruvian subsidiary, Kiwanda SAC holds the rights to the Picha Project located in the Moquegua and Puno Departments of Peru, 17 km ENE of the San Gabriel Project (former Chucapaca – Buenaventura SAA (NYSE:BVN)) gold deposit, located in the Puno Department of Peru. The Picha Project is a copper-silver exploration project comprising of twenty granted mining concessions for a total of 16,500 hectares (165 km²), as well as an additional 3,500 hectares (35 km²) staked and currently awaiting title as mining concessions.

In addition to the above, Kiwanda SAC has staked 8 claims covering 6,000 hectares in the Puno Region, 30km northeast of the Picha Project, which make up the Charaque exploration project.

Valor is also the 100% owner of the following interests in Canada:

- Right to earn an 80% working interest in the Hook Lake Uranium Project located 60km east of the Key Lake Uranium Mine in northern Saskatchewan. Covering 25,846 hectares (258km²), the 16 contiguous mineral claims host several prospective areas of uranium mineralisation; and
- 100% equity interest in 19 contiguous mineral claims covering 62,233 hectares (622km²) in northern Saskatchewan, known as the Cluff Lake Uranium Project. The property is located 7km east of the formerproducing Cluff Lake Uranium Mine and much of the project area is located within the Carswell geological complex that hosts the Cluff Lake Mine; and
- Six additional projects within the Athabasca Basin with 100% equity interest in 13 mineral claims covering 12,025 hectares at the Hidden Bay Project, Surprise Creek Project, Pendleton Lake Project, MacPherson Lake **Project**, Smitty Project and Lorado Project.

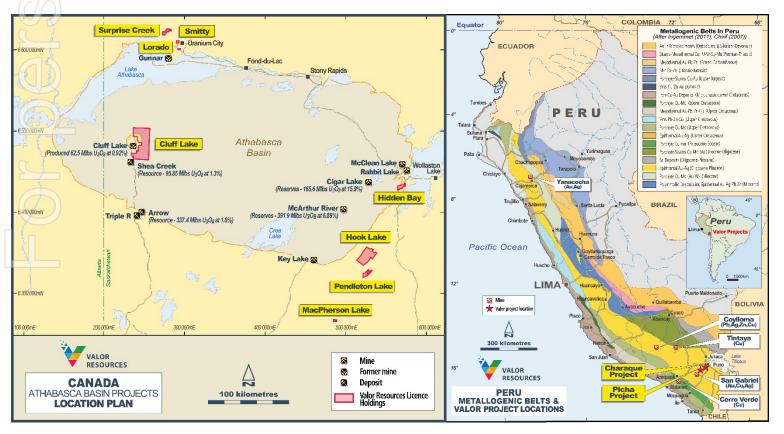



APPENDIX 1

Table of assay results and sample locations (grid system – WGS84 UTM Zone 19S):

	Sample Id	East - Wgs84	North - Wgs84	Elevation	Target	Width (m)	Sample type	Au ppb	Ag ppm	As ppm	Ba ppm	Bi ppm	Co ppm	Cr ppm	Cu ppm	Fe %	К%	Mn ppm	Mo ppm	Р%	Pb ppm	Sb ppm	V ppm	W ppm	Zn ppm
	000518	343196	8217407	4290	Uturucuy	3.00x3.00	Chip - Select	2.5	25	601	239	0.21	2.9	25	67820	0.4	3.3	360	3.02	0.0176	529.2	5.02	10	0.7	2747
	000519	350985	8218448	4068	Ichucollo	3.00x3.00	Chip	2.5	2.21	582	1713	0.16	37.2	29	1662	12.04	1.47	>10000	23.86	0.0446	258.8	2.75	80	0.8	6313
	000520	350792	8218428	4109	Ichucollo	2.00x0.20	Channel	43	1.18	208	2258	0.16	36.3	42	94.3	4.43	0.83	574	5.97	0.0281	98	0.91	84	0.8	367
	000521	350790	8218431	4112	Ichucollo	5.00x5.00	Chip	46	0.15	436	2181	0.04	1.9	136	50.7	2.65	1.82	43	8.73	0.0329	49.8	0.93	58	0.8	52
	000522	350769	8218443	4125	Ichucollo	2.00x0.20	Channel	10	0.15	1026	854	0.07	73.4	317	79.9	7.32	0.21	1317	52.61	0.0769	130.4	1.56	66	0.5	367
	000523	350818	8218483	4115	Ichucollo	2.00x0.20	Channel	11	0.28	389	937	0.09	16.9	76	96.2	4.72	0.51	532	15.17	0.0485	170.6	1.03	84	0.5	499
70	000524	351023	8218536	4070	Ichucollo	0.35x0.20	Channel	12	22.5	3613	623	0.25	43.3	14	77460	8.78	1.87	>10000	81.84	0.0303	2605	7.43	116	3.2	3634
JD)	000525	350739	8218326	4119	Ichucollo	2.00x0.20	Channel	10	0.1	32	1136	0.09	12.5	70	127.2	3.27	0.68	528	2.69	0.054	206.9	0.78	82	0.6	188
	000526	350694	8218287	4137	Ichucollo	2.00x0.20	Channel	13	0.18	72	1034	0.05	11.5	56	73.2	2.92	0.38	781	5.51	0.0425	114.5	0.95	58	0.4	253
//) [000527	350707	8218428	4144	Ichucollo	2.00x0.20	Channel	9	0.2	374	620	0.09	24.4	41	165.4	7.61	0.33	458	13.05	0.0759	209.3	1.42	81	0.5	240
	000529	350718	8218474	4152	Ichucollo	2.00x0.20	Channel	12	0.32	329	1539	0.22	8.7	149	103.8	3.19	0.37	48	49.15	0.0503	382.2	1.13	80	0.5	266
	000530	350703	8218507	4166	Ichucollo	2.00x0.20	Channel	10	0.3	1505	716	0.11	30.8	47	82.9	12.01	0.4	577	96.36	0.1228	795.5	1.3	86	0.4	745
_	000531	350768	8218590	4163	Ichucollo	2.00x0.20	Channel	10	0.09	60	1303	0.16	24.3	61	56.4	2.8	0.42	434	3.5	0.0424	56.8	0.95	83	0.5	302
	000532	350759	8218491	4144	Ichucollo	2.00x0.20	Channel	5	0.26	4509	1306	0.21	3.3	250	77.5	12.21	0.7	51	412.89	0.0401	940.6	4.59	52	0.4	107
57-	000533	350753	8218432	4133	Ichucollo	2.00x0.20	Channel	6	0.31	3069	715	0.07	7	395	49	13.24	0.46	132	146.97	0.0683	1480	3.76	62	0.4	397
	000534	350916	8218589	4100	Ichucollo	2.00x0.20	Channel	11	0.46	101	1012	0.09	23.6	72	154.8	3.15	0.97	406	2.5	0.0501	40.5	0.75	79	0.6	234
	000535	350916	8218591	4100	Ichucollo	2.00x0.20	Channel	9	0.77	134	1152	0.07	32	57	408.8	3.11	0.92	374	2.72	0.0519	45.4	0.77	82	0.6	326
	000536	350916	8218593	4100	Ichucollo	2.00x0.20	Channel	10	1.52	216	1035	0.08	39.3	66	1369	3.41	1.12	433	3.23	0.0563	58.8	0.95	83	0.6	352
	000538	350916	8218595	4100	Ichucollo	2.00x0.20	Channel	6	2	174	816	0.11	38.3	61	1239	4.16	0.9	423	3.27	0.0621	81.4	1.08	91	0.7	333
\bigcirc	000539	350916	8218597	4100	Ichucollo	2.00x0.20	Channel	2.5	0.72	121	1025	0.05	23.3	75	744.8	2.82	1.32	338	2.9	0.0605	37.8	0.76	71	0.6	217
	000540	350788	8218638	4160	Ichucollo	2.00x0.20	Channel	2.5	0.21	35	1070	0.06	22.3	69	53.6	3.01	1.49	626	2.04	0.0618	34.3	0.72	81	0.6	181
リント	000541	350757	8218620	4172	Ichucollo	1.50x1.50	Select	7	1.26	752	611	0.05	2.8	328	213.4	11.81	0.31	69	123.76	0.0416	1072	1.64	26	0.2	54
	000542	350645	8218566	4194	Ichucollo	2.50x0.20	Channel	2.5	4.22	1627	1206	0.12	19.7	70	3909	3.87	0.65	306	4.93	0.058	737.9	2.07	94	0.6	593
75 -	000543	350615	8218564	4196	Ichucollo	2.00x0.20	Channel	9	0.51	229	1401	0.1	30.7	50 56	552.5	4.42	0.49	980	2.17	0.0526	60.4	0.78	80	0.4	378
JD) -	000544	350616 350533	8218540 8218648	4193 4237	Ichucollo	2.00x0.20	Channel Channel	25	4.38	1180	514	0.23	36.9 43	58	2559	7.29	0.43	834	3.69	0.0669	246.2	1.62	135	0.6	341
-	000546	350533	8218648	4237	Ichucollo	2.00x0.20 2.00x0.20	Channel	2.5	0.75	133 323	604 396	0.14	43	54	110.6 405.3	2.97 5.12	0.26	424 551	4.24 6.44	0.0514	135.3 626.9	0.75	93 115	0.6 0.7	378
	000548	350531	8218648	4237	Ichucollo	2.00x0.20	Channel	2.5	0.76	471	672	0.20	57.8	41	782.1	7.54	0.23	1205	6.11	0.0744	550.4	0.74	113	0.7	519
	000548	350525	8218828	4251	Ichucollo	2.00x0.20	Channel	5	0.32	84	692	0.05	40.4	38	314	4.34	0.28	1103	2.8	0.0414	42.2	0.65	83	0.6	279
	000550	350582	8218882	4250	Ichucollo	2.00x0.20	Channel	7	0.98	153	839	0.06	25.2	56	154.9	4.38	1.41	409	4.26	0.056	77.5	0.71	99	0.5	420
	000551	350603	8218907	4247	Ichucollo	2.00x0.20	Channel	2.5	1.75	203	1014	0.2	28.5	36	209	4.34	0.38	852	4.97	0.0635	255.4	0.89	112	0.5	346
	000552	350845		4125	Ichucollo	4.00x4.00	Chip	2.5	0.25	239	1662	0.19	9.3	19	43.3	12.16	1.68	>10000	31.37	0.0283	477.1	1.4	68	0.8	779
	000553		8218009	4073	Ichucollo	0.70x0.20	Channel	6	5.6	2678	610	0.31	21.7	32	17330	8.76	1.97	9451	21.86	0.0547	831.6	4.43	102	2.9	1624
-	000554		8218008	4073	Ichucollo	0.8.x0.20	Channel	7	6.12	3198	544	0.18	15.9	30	15370	7.81	1.97	>10000	20.42	0.0446	701.2	4.14	89	1.9	1151
	000555	351148		4073	Ichucollo	0.60x0.20	Channel	5	8.52	3416	938	0.18	29.6	56	7878	9.93	1.89	>10000	65.66	0.0462	608.4	5.14	81	1.7	1629
	000556	351147	8218005	4073	Ichucollo	0.70x0.20	Channel	2.5	6.57	2825	1131	0.26	26	55	10950	11.19	2.42	>10000	52.97	0.0447	1279	5.46	97	1.8	2892
	000558	351145	8218003	4073	Ichucollo	0.80x0.20	Channel	5	6.01	3434	962	0.87	16.5	38	19240	6.49	1.9	9334	36.35	0.0458	627.4	5.37	92	2.5	2295
-	000559	351144	8218002	4073	Ichucollo	0.70x0.20	Channel	5	5.31	5872	691	0.35	16.6	43	21460	7.69	2.02	>10000	51.45	0.041	876	4.92	105	2.9	2323
	000560	351144	8218000	4073	Ichucollo	0.70x0.20	Channel	5	9.35	4710	937	0.33	15.7	64	14410	7.24	2.25	7558	38.65	0.0486	2018	5.82	117	2.1	1750
	000561	351153	8218010	4073	Ichucollo	0.55x0.20	Channel	6	5.99	3716	631	0.3	22.1	23	14210	9.42	2.28	>10000	31.99	0.0512	502.7	5.03	113	1.9	1044
	000562	351154	8218011	4073	Ichucollo	0.50x0.20	Channel	2.5	2.3	2202	569	0.15	17.6	34	4830	10.69	1.43	>10000	39.57	0.0344	441.9	3.69	63	1.1	997

ASX:VAL



Sample Id	East - Wgs84	North - Wgs84	Elevation	Target	Width (m)	Sample type	Au ppb	Ag ppm	As ppm	Ba ppm	Bi ppm	Co ppm	Cr ppm	Cu ppm	Fe %	K %	Mn ppm	Mo ppm	Р%	Pb ppm	Sb ppm	V ppm	W ppm	Zn ppm
000563	351146	8218944	4135	Ichucollo	2.00x0.20	Channel	8	0.34	102	580	0.11	16.2	86	97.9	3.87	1.72	591	2.71	0.0654	44.1	0.8	88	0.5	168
000564	351101	8218972	4144	Ichucollo	1.00x0.20	Channel	2.5	0.32	378	1175	0.04	2.7	601	319.1	2.54	0.19	149	21.12	0.0163	596.1	1.64	14	0.1	98
000565	351075	8219001	4151	Ichucollo	3.00x3.00	Channel	2.5	0.11	104	592	<0.04	2.6	654	46.9	6.17	0.06	1015	13.31	0.0121	631.8	1.28	20	0.1	777
000566	351079	8219051	4170	Ichucollo	2.00x2.00	Channel	9	2.94	1955	355	0.15	1.8	589	165.2	5.75	0.16	281	169.5	0.0227	899.8	3.37	16	0.2	21
000568	351081	8219058	4168	Ichucollo	2.00x0.20	Channel	5	1.27	871	1144	0.2	8.3	129	235.1	7.91	1.01	190	112.14	0.0627	220.4	3	76	0.5	189
000569	351087	8219094	4181	Ichucollo	3.00x3.00	Chip - Select	2.5	75	5892	530	0.06	16.4	531	1429	9.03	0.32	222	215.19	0.0309	796.5	30.4	25	0.3	57
000570	351118	8219122	4189	Ichucollo	1.00x1.00	Chip - Select	2.5	2.21	1025	233	0.05	2.4	539	448.6	6.55	0.26	88	112.21	0.0357	1446	3.8	19	0.2	20
000571	351158	8219126	4184	Ichucollo	2.00x0.20	Chip - Select	2.5	8.31	1282	475	0.04	20	485	1611	3.62	0.19	268	61.16	0.0209	219.5	6.56	35	0.3	157
000572	351167	8219149	4195	Ichucollo	2.00x0.20	Channel	2.5	7.06	881	884	0.04	24.7	92	440.1	5.4	0.57	339	29.11	0.0628	352.6	5.58	67	0.5	88
000573	351009	8219271	4243	Ichucollo	1.50x0.20	Channel	6	0.41	49	822	0.1	33.7	51	63.8	1.89	0.53	391	1.73	0.0648	58.8	0.86	80	0.6	228
000574	351011	8219243	4228	Ichucollo	2.00x0.20	Channel	11	2.5	417	1696	0.11	38	58	311.9	4.28	1.74	317	15.44	0.0753	107.5	2.56	108	0.6	114
000575	351003	8219177	4203	Ichucollo	2.00x0.20	Channel	7	4.51	585	2900	0.15	46.2	47	565.1	4.7	1.12	362	19.81	0.0808	137	3.29	106	0.6	89
000576	351006	8219152	4189	Ichucollo	2.00x0.20	Channel	9	2.75	334	1107	0.07	47.5	41	480.1	5.09	0.56	543	17.98	0.0733	181	1.27	119	0.5	242
000578	351006	8219114 8218901	4170 4097	Ichucollo	2.00x0.20	Channel	6 2.5	1.58 14.9	191	1107 877	0.29	99.6	126	491.9 16190	5 19	0.84	1294	10.53	0.0775	80.3 195.7	1.68 2.07	95	0.8	351
000579	351210 351228	8218901	4097	Ichucollo Ichucollo	2.00x0.20 2.00x0.20	Channel Channel	2.5	14.9	863 176	733	0.45 <0.04	35.9 32	126 94	520	5.18 5.39	1.29 0.74	834 743	12.74 5.87	0.0608	69	0.43	102	1.9 0.5	271 749
000581	351228	8218907	4100	Ichucollo	2.00x0.20	Channel	2.5	3.59	413	896	0.69	200.7	358	1268	3.07	0.74	1259	8.67	0.0578	92.8	1.63	102 88	0.3	743
000582	351281	8219045	4125	Ichucollo	2.00x0.20	Channel	2.5	0.29	92	1293	< 0.03	46.9	56	546.4	3.8	0.74	817	2.54	0.0378	16.3	0.31	92	0.5	148
000583	351275	8219045	4125	Ichucollo	2.00x0.20	Channel	2.5	0.31	75	1255	<0.04	40.5	74	540.4	2.54	0.58	444	1.76	0.0709	25.4	0.26	87	0.3	136
000584	351277	8219054	4119	Ichucollo	2.00x0.20	Channel	2.5	0.28	59	1436	<0.04	77.8	79	6485	2.74	1.34	469	2.09	0.0799	24.9	0.25	89	0.4	130
000585	351275	8219112	4132	Ichucollo	2.00X0.20	Channel	2.5	2.58	154	2544	<0.04	376.7	38	16890	1.52	0.84	1353	2.53	0.0642	45.5	0.11	66	0.5	223
000586	351266	8218926	4094	Ichucollo	2.00x0.20	Channel	2.5	10.1	1812	2698	<0.04	41	211	21810	8.4	0.65	1130	12.44	0.0494	350	1.62	92	0.9	861
000588	351264	8218926	4094	Ichucollo	2.00x0.20	Channel	2.5	2.2	558	963	0.13	49.1	128	3699	6.42	0.77	892	8.52	0.0585	71.2	0.97	104	0.6	823
000589	351262	8218927	4094	Ichucollo	2.00x0.20	Channel	2.5	5.98	1485	1371	<0.04	62.8	142	8176	8.45	1.05	1343	13.68	0.0528	192.4	1.92	127	0.5	1143
000590	351261	8218926	4093	Ichucollo	2.00x0.20	Channel	2.5	3.69	1015	984	<0.04	31.1	147	9310	4.63	1.71	767	5.59	0.065	1389	1.08	95	0.9	525
000591	351259	8218925	4093	Ichucollo	2.00x0.20	Channel	2.5	3.25	634	729	<0.04	45.8	75	3906	3.56	1.64	484	3.92	0.0687	84.3	0.69	89	0.7	451
000592	351258	8218924	4093	Ichucollo	2.00x0.20	Channel	2.5	6.92	2333	1447	<0.04	34.9	247	19850	5.26	0.91	627	9.32	0.0612	180.2	1.72	97	0.9	491
000593	351546	8218943	4096	Ichucollo	2.00x0.20	Channel	2.5	3.38	338	1071	<0.04	67.3	89	604.2	5.32	0.67	970	17.59	0.0655	199.8	0.42	95	0.4	816
000594	351244	8218942	4096	Ichucollo	2.00x0.20	Channel	2.5	10.2	1118	1154	<0.04	78	132	998.1	5.52	1.23	1117	64.91	0.0704	682.6	0.9	94	0.4	551
000595	351242	8218942	4096	Ichucollo	2.00x0.20	Channel	2.5	5.35	563	959	<0.04	67.2	71	3934	3.44	1.25	724	11.63	0.0576	260.2	1.11	90	0.5	595
000596	351240	8218941	4096	Ichucollo	2.00x0.20	Channel	2.5	3.85	272	795	<0.04	31.8	65	2701	2.82	0.83	586	5.84	0.0671	209.5	0.71	86	0.5	450
000598	351238	8218940	4096	Ichucollo	2.00x0.20	Channel	2.5	2.84	216	846	<0.04	56.3	112	832.6	5.52	1.23	1094	5.49	0.0593	117.3	0.56	110	0.4	905
000599	351237	8218940	4096	Ichucollo	2.00x0.20	Channel	2.5	2.56	366	768	<0.04	40.8	191	4476	4.88	1.87	945	4.84	0.0639	843.9	0.98	105	0.6	735
000600	351235	8218939	4096	Ichucollo	2.00x0.20	Channel	2.5	12.8	647	769	<0.04	29.3	303	16980	3.82	1.14	513	14.27	0.064	2108	2.22	111	1.5	374
000601	351232	8218940	4180	Ichucollo	2.00x0.20	Channel	2.5	2.08	898	918	0.06	47.7	75	2829	4.61	1.47	1206	5.02	0.0738	74.8	0.65	103	0.6	453
000602	351230	8218939	4180	Ichucollo	2.00x0.20	Channel	2.5	32	6085	1519	<0.04	28.8	208	28110	5.17	1.07	343	27.13	0.0613	4587	2.08	88	1.5	1081
000603	351229	8218938	4180	Ichucollo	2.00x0.20	Channel	2.5	1.49	815	720	<0.04	27.3	182	4087	2.25	1.38	363	2.82	0.0636	50.6	0.36	81	0.9	460
000604	351227	8218938	4180	Ichucollo	2.00x0.20	Channel	2.5	4.28	908	1034	<0.04	44.7	60	6044	5.71	1.35	1111	4.3	0.0735	96.4	0.98	114	0.9	635
000605	351225	8218937	4180	Ichucollo	2.00x0.20	Channel	2.5	4.7	1826	887	<0.04	27.4	271	13460	4.36	1.64	810	6.89	0.0577	111	1.37	90	1.1	572
000606	351223	8218936	4180	Ichucollo	2.00x0.20	Channel	2.5	1.71	890	890	0.04	45.6	246	3908	3.96	1.04	893	3.66	0.0826	57.9	0.83	88	1.3	481
000608	351221	8218935	4180	Ichucollo	2.00x0.20	Channel	2.5	4.86	798	682	0.2	32.8	90	7265	2.05	1.22	371	8.7	0.0752	157.9	1.19	85	0.8	234
000609	351219	8218935	4180	Ichucollo	2.00x0.20	Channel	2.5	15.9	1285	770	0.06	69.4	225	13370	4.79	0.95	728	18.68	0.0693	267.9	1.72	99	0.9	607
000610	351217	8218934	4180	Ichucollo	2.00x0.20	Channel	2.5	8.92	673	1579	<0.04	42.4	84	9712	5.25	0.38	946	15.8	0.0575	312.8	2.79	100	0.7	706
000611	351284	8219111	4132	Ichucollo	2.00x0.20	Channel	2.5	5.53	794	425	0.04	13.6	58	461.5	2.92	0.48	40	28.75	0.1045	175.8	2.06	95	0.6	86
000612	351283	8219109	4132	Ichucollo	2.00x0.20	Channel	2.5	3.63	329	725	<0.04	69.4	58	4582	1.7	0.62	234	6.64	0.0685	78.9	0.49	84	0.5	141

ASX:VAL



s	ample Id	East - Wgs84	North - Wgs84	Elevation	Target	Width (m)	Sample type	Au ppb	Ag ppm	As ppm	Ba ppm	Bi ppm	Co ppm	Cr ppm	Cu ppm	Fe %	К%	Mn ppm	Mo ppm	Р%	Pb ppm	Sb ppm	V ppm	W ppm	Zn ppm
	000613	351282	8219108	4132	Ichucollo	2.00x0.20	Channel	2.5	14	955	2884	0.04	161.3	46	6301	2.79	0.65	550	8.82	0.0833	154.8	1.23	92	0.5	168
	000614	351280	8219106	4132	Ichucollo	2.00x0.20	Channel	2.5	24.5	2225	4114	0.13	139.8	42	7808	4.63	0.77	502	42.61	0.099	243.8	7.36	96	0.5	92
	000615	351280	8219104	4132	Ichucollo	2.00x0.20	Channel	2.5	5.41	296	610	<0.04	161.8	49	9693	1.53	0.77	646	6.75	0.0721	66.8	0.76	72	0.5	81
\square	000616	351278	8219103	4132	Ichucollo	2.00x0.20	Channel	2.5	3.43	208	827	0.11	100.7	55	4220	1.35	0.86	416	3.03	0.0747	63.7	0.31	66	0.5	68
	000618	351277	8219101	4132	Ichucollo	2.00x0.20	Channel	7	6.75	476	1008	0.07	158.8	41	13620	1.86	0.82	681	5.83	0.0792	107.1	5.89	62	0.5	102
	000619	351276	8219100	4132	Ichucollo	2.00x0.20	Channel	9	9.81	292	667	0.08	144.1	56	1858	1.62	0.88	421	3.61	0.0797	85.7	1.76	72	0.6	52
	000620	351273	8218956	4082	Ichucollo	2.00x0.20	Channel	5	1.36	210	722	<0.04	66.2	146	329.7	5.36	0.99	1250	9.12	0.0652	64.6	1.02	112	0.4	511
))	000621	351275	8218957	4082	Ichucollo	2.00x0.20	Channel	2.5	9.53	723	930	<0.04	73.2	117	1254	3.81	1.48	656	15.55	0.0658	256.9	1.63	91	0.5	390
	000622	351276	8218959	4082	Ichucollo	2.00x0.20	Channel	5	11.9	2832	1333	<0.04	88.4	260	9096	5.48	1.98	1141	22.35	0.0737	280.7	2.75	132	0.5	570
	000623	351277	8218960	4082	Ichucollo	2.00x0.20	Channel	5	2.21	566	1061	<0.04	89.8	59	1430	5.32	1.37	957	4.72	0.0683	71.5	1.31	121	0.5	597
	000624	351279	8218962	4082	Ichucollo	2.00x0.20	Channel	6	2.91	356	962	<0.04	51.2	106	3262	5.01	0.91	1006	4	0.0719	93.9	0.79	92	0.5	595
2 🗋	000625	351280	8218963	4082	Ichucollo	2.00x0.20	Channel	6	0.99	117	1028	<0.04	33.1	94	781.5	4.34	0.78	929	2.59	0.0663	42.1	0.84	87	0.5	547
	000626	351282	8218964	4082	Ichucollo	2.00x0.20	Channel	2.5	0.55	56	930	<0.04	30.3	44	96.4	3.25	0.68	617	2.13	0.0596	33.8	0.33	77	0.4	303
	000628	351283	8218965	4082	Ichucollo	2.00x0.20	Channel	2.5	2.01	151	776	0.05	34	109	587.3	1.59	2.27	270	4.46	0.0633	64.4	0.61	58	0.5	228
)	000629	351285	8218966	4082	Ichucollo	2.00x0.20	Channel	2.5	3.21	2157	1386	<0.04	67	210	9881	4.28	1.34	1030	7.5	0.0709	71.5	2.85	111	0.6	555
	000630	351283	8218990	4108	Ichucollo	2.00x0.20	Channel	2.5	4.62	4053	2115	<0.04	79.8	140	13300	5.96	1.69	1302	9.55	0.0835	130.6	2.94	118	0.7	493
	000631	351290	8218989	4142	Ichucollo	2.00x0.20	Channel	2.5	2.19	1375	1553	<0.04	16.8	228	10500	3.55	2.36	730	5.9	0.0614	60.4	2.21	94	0.6	427
3	000632	351298	8219001	4105	Ichucollo	2.00x0.20	Channel	2.5	2.64	1047	1511	0.15	34	125	4920	2.93	1.2	768	8.44	0.0712	73.4	1.62	101	0.5	287
))	000633	351299	8219000	4105	Ichucollo	2.00x0.20	Channel	6	2.24	1263	1510	0.06	42.3	147	5706	4.69	0.93	1158	4.89	0.0667	56.2	2.04	94	0.5	481
	000634	351254	8219254	4173	Ichucollo	2.00x0.20	Channel	5	0.47	366	867	<0.04	16.3	134	170.2	3.96	0.52	713	15.03	0.0542	107	0.69	81	0.3	208
	000635	351379	8219210	4136	Ichucollo	0.70x0.20	Channel	6	99	7802	391	0.66	151.8	31	59450	8.62	1.98	4947	347.71	0.0413	12150	6.75	122	6.5	7324
	000636	351386	8219203	4117	Ichucollo	0.70x0.20	Channel	2.5	4.61	652	400	0.14	25.4	36	11840	4.81	1.69	>10000	58.21	0.0329	1335	1.79	95	1.6	3607
)) _	000638	351217	8219421	4182	Ichucollo	1.30x0.20	Channel	8	0.41	133	838	0.16	9	87	172	4.37	1.44	173	3.11	0.071	41.5	0.34	127	0.5	104
	000639	350960	8219574	4282	Ichucollo	4.00x4.00	Chip - Select	2.5	1.46	618	2338	<0.04	6.2	83	264.3	3.6	2.02	104	8.13	0.0494	90.3	0.43	66	0.5	51
ノトト	000640	351485	8219337	4127	Ichucollo	0.50x0.20	Channel	2.5	0.15	118	340	<0.04	1.9	230	37.2	2.74	0.13	2198	4.83	0.028	9.8	0.64	46	0.3	666
	000641	351086	8219914	4326	Ichucollo	1.50x1.50	Select	6	2.99	942	491	<0.04	99.4	705	1766	4.92	0.86	1943	3.57	0.0411	782.4	1.18	52	0.5	354
	000642	351082	8219719	4273	Ichucollo	2.00x2.00	Select	9	9.43	617	615	0.09	77.6	57	774.4	6.08	0.57	621	24.78	0.1239	370.3	0.89	117	0.4	234
)) L	000643	351456	8219985	4213	Ichucollo	0.20x0.20	Channel	2.5	0.35	118	1515	0.06	4.8	105	123.7	9.59	0.28	>10000	20.18	0.0218	28	0.57	45	0.2	351

ASX:VAL



JORC CODE, 2012 EDITION – TABLE 1 REPORT TEMPLATE

SECTION 1 SAMPLING TECHNIQUES AND DATA

Criteria	JORC Code explanation	Commentary
\mathcal{D}	Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	Rock chip samples were taken as selective samples in mineralized areas, channel samples across mineralized structures/zones or more random samples in undefined mineralized areas. The sampling technique for each sample is shown in the table above in the body of the report. All samples were taken from in-situ mineralisation.
Sampling	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	Rock chip/channel samples are taken for an indication of mineralisation only.
techniques	Aspects of the determination of mineralisation that are Material to the Public Report.	To date a total of 625 samples have been taken at Picha Project, which includes QAQC samples. Assay results have been received for all samples submitted to the laboratory. This report details the results from the most recent 127 samples. The selective samples have a high potential for bias and should not be considered as being representative of the overall mineralized structure or zone. Sample sites were selected on the basis of visual copper mineralisation and where associated with opaline silica and alteration.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc).	Not applicable – no drilling completed.
	Method of recording and assessing core and chip sample recoveries and results assessed.	Not applicable – no drilling completed.
Drill sample	Measures taken to maximise sample recovery and ensure representative nature of the samples.	Not applicable – no drilling completed.
recovery	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	Not applicable – no drilling completed.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Not applicable – no drilling completed and not appropriate for early-stage exploration.
- 35 5	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	Rock type and geological information recorded at location of each rock chip sample – qualitative in nature.
	The total length and percentage of the relevant intersections logged.	Not applicable – no drilling completed.
	If core, whether cut or sawn and whether quarter, half or all core taken.	Not applicable – no drilling completed
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	Not applicable – no drilling completed.
Sub-sampling	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	All samples were dried at 100° C, crushed, split off quarter and pulverized. A sample of 250g with a grind size of 95% passing 140 microns is then selected for analysis.
techniques and sample	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	No field subsampling - not appropriate for early-stage exploration
preparation	Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.	CRMs (Standards and Blanks) and duplicates were inserted for QAQC protocols approximately every 10 samples
	Whether sample sizes are appropriate to the grain size of the material being sampled.	Sample sizes are considered appropriate with an average size of 3.0kg. (around 10% of the total samples).
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Samples were assayed by SGS del Peru S.A.C, Callao, Peru. A multi-acid (four-acid) digest (near-total digestion) was used. The digestion solution was then analysed by ICP-MS for a multi-element suite of 50 elements. A 30g Fire assay with AAS finish was used to determine Au.
Quality of assay data and	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations	Not applicable – no geophysical tools used in sampling.



Integration of the stabilished. appropriate for early-stage exploration. Company standards and blanks show that assay values are accurate. 10 samples. Results of standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company personnel. Internal verification of significant results by more than one company geologist. Verification of significant intersections by either independent or alternative company personnel. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Data spacing for reporting of Exploration Resource and Ore Resource astimation. Topographic control is considered appropriate for early-stage exploration. Data spacing for reporting of Exploration Resource and Ore Resource astimation procedure(s) and clossifications applied. No compositing. Orientation of data in feediment of signifing a distribution is sufficient to establish the degree of geological and grave staken at observed mineral securi	continued Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. Laboratory GAQC procedures involve the use of internal lab standards and blanks are inserted at a rate of 10 samples. Results of standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company been established. Laboratory GAQC procedures involve the use of internal lab standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company samples. Internal verification of significant results by more than one company geologist. Verification of primary data, data entry procedures, data verification, data storage (physical) and electronic) protocols. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical) and electronic) protocols. No adjustment to assay data made = not applicable. Location of the grid system used to locate drill holes (collar and down-hole surveys), trenches, mine workings and ather locations used in Mineral Resource estimation. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this gri Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the driat data shaw used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this gri Topographic contr	continued Nature of quility control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. Laboratory OAQC procedures involve the use of internal lab standards and duplicates – consider appropriate for early-stage exploration. Company standards and blanks were inserted at a rate of 10 samples. Results of standards and blanks show that assay values are accurate. Verification of sampling and assaying The verification of significant intersections by either independent or alternative company personel. Internal verification of significant results by more than one company geologist. Verification of assaying The verification of primmy data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not applicable – no drilling completed. Documentation of primmy data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not adjustment to assay data made – not applicable. Location of data points Accurrey and quility of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Data spacing and distribution Data spacing for reporting of Exploration Results. The grid system used is WGS40 UTM Zone 19S. All reported coordinates are referenced to his grid original spacing and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and clossifica	Criteria	JORC Code explanation	Commentary
continued Nature of guality control procedures adopted leg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. Laboratory OAQC procedures involve the use of internal lab standards and duplicates - consid appropriate for early-stage exploration. Company standards and bulks were inserted at a rate 10 samples. Results of standards and blanks show that assay values are accurate. Verification of sampling and assaying The verification of significant intersections by either independent or alternative company personnel. Internal verification or significant results by more than one company geologist. Verification of sampling and assaying The use of twinned holes. Not applicable - no driling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not applicable - no driling completed. Discuss any adjustment to assay data. No adjustment to assay data made - not applicable. Location of data points Sample sites were recorded using a Gamin Oregon S50 GPS with an accuracy of ±5m. Data spacing and distribution Mether the data spacing on distribution is sufficient to establish the degree of geological and graphic control is considered appropriate for early-stage exploration. Data spacing and distribution to grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classification applied. Not compositing. Orientation to ge	continued Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. Laboratory GAQC procedures involve the use of internal lab standards and blanks are inserted at a rate of 10 samples. Results of standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company been established. Laboratory GAQC procedures involve the use of internal lab standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company samples. Internal verification of significant results by more than one company geologist. Verification of primary data, data entry procedures, data verification, data storage (physical) and electronic) protocols. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical) and electronic) protocols. No adjustment to assay data made = not applicable. Location of the grid system used to locate drill holes (collar and down-hole surveys), trenches, mine workings and ather locations used in Mineral Resource estimation. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this gri Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the driat data shaw used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this gri Topographic contr	continued Nature of quality control procedures adapted for gatandards, banks, adaptace, sertendi balaroatary checks of whether acceptible levels of accuracy (is tok of bilis) and arcsis in here been established. Labaratory checks procedures induces we inserted at a rate of an appropriate for early stages ophraton. Company standards and balands serve inserted. Verification of significant intersections by either independent or alternative company prostonel. The weification of significant intersections by either independent or alternative company prostonel. Not applicable – no drilling completed. Descendent of primmy date, date entry procedures, data verification, data storage (phi) and betchnol (particut). Not applicable – no drilling completed. Not applicable – no drilling completed. Location of data assoning Descendent data (particut). Not applicable – no drilling completed. Not applicable – no drilling completed. Location of data assoning and data broken of the link by foother and flow holes surver). Somple attes were recorded using a data in development. Not applicable – no drilling completed. Location of data assoning and parties Descendent data (parties – constage). The grif system stand. The grif system stand. Location of data data of data data (parties – constage). Somple attes veries constage). Somple attes veries constage data. Josta spacing of the grif system attes. Descendent data (parties data data data data). Somple attes attes a	laboratory tests	factors applied and their derivation, etc.	
been established. 10 samples. Results of standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company perification of significant results by more than one company geologist. Internal verification of significant results by more than one company geologist. sampling and assorying of the event of the distinct of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and digital) transferred to Perthoff field geologist. All data checked by responsible geologist and digitally transferred to Perthoff field geologist. All data checked by responsible geologist and digitally transferred to Perthoff. Location of data policy of surveys used to locate drill holes (collor and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Location of the grid system used. Quality and adequacy of topographic control. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this of standards and blanks show that assay values are a soft known heres used in field egological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and channel sampling was taken at observed mineral occurrences, areas of known heres used is onsidered appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not compositing.	been established. 10 samples. Results of standards and blanks show that assay values are accurate. Verification of significant intersections by either independent or alternative company section of significant results by more than one company geologist. Internal verification of significant results by more than one company geologist. verification of primary data, data entry procedures, data verification, data storage (physical) Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical) Handwritten data collected in the field was transferred into an excel spreadsheet and verified by field geologist. All data checked by responsible geologist and digitally transferred to Pert office. Location of data Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Gamin Oregon 550 GPS with an accuracy of ±5m. Location of the grid system used. To pographic control. To pographic control is considered appropriate for early-stage exploration Data spacing and distribution is sufficient to establish the degree of geological and distribution is sufficient to establish the degree of geological and and channel sampling was taken at observed mineral occurrences, areas of known hist results, and areas with mineralisation potential. Data spacing and distribution is sufficient to establish the degree of geological and procedure(s) and areas with mineralisation potential. Not applicable – no Mi	been existabilited. 10 samples Routis of standards and banks show that assay values are accurate. Verification of spanling on there services and standards and standards and banks. Not applicable - no adhing completed. The work for and of spanling on there services and standards	continued	Nature of quality control procedures adopted (eg standards, blanks, duplicates, external	Laboratory QAQC procedures involve the use of internal lab standards and duplicates - considered
Verification of sampling and assoying The verification of significant intersections by either independent or alternative company personnel. Internal verification of significant results by more than one company geologist. Verification of sampling and assoying The use of twinned holes. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Handwritten data collected in the field was transferred into an excel spreadsheet and verified field geologist. All data checked by responsible geologist and digitally transferred to Perth offic hold guittent to assay data made – not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Jouly and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data in relation to geological Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applie	Verification of sampling and assoying The verification of significant intersections by either independent or alternative company personnel. Internal verification of significant results by more than one company geologist. Verification of sampling and assoying The use of twinned holes. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Handwritten data collected in the field was transferred into an excel spreadsheet and verified by field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Data spacing and distribution Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this gri Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grad continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of	The writefaction of significant itersections by either independent or alternative company personnel. Internal werification of significant results by more than one company geologist. Pressionel. The use of buinned holes. Not applicable - no diffing completed. Documentation of primary data, data entry procedures, data verification, data storage (physic) and electranic), protocols. Not applicable. Not applicable. Documentation of primary data, data entry procedures, data verification, data storage (physic). Not applicable. Not applicable. Location of data points Accurementation occurs and data holes (collar and down-hole survey). Sample aleas were recorded using a Garmin Oregon SS0 GPS with an accursey of 25m. The end spacing on definition of the grid system used. The grid spacing on definition of the grid system used. Sample aleas were recorded using a Garmin Oregon SS0 GPS with an accursey of 25m. The use disk grid spacing on reporting of Exploration Results. The grid spacing on definition or grid spacing on definition or a mode spacing on definition or and space control. Topographic cornet is considered appropriate for and visage applicable. Data spacing of reporting of Exploration Results. The end space on dimension and the degree of geological on distribution os applicable. Mitcher the data spacing and distribution is addificent to existable the degree of geological on distribution and the circitation of the net systens applicable. Not applicable.		laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have	appropriate for early-stage exploration. Company standards and blanks were inserted at a rate of 1
Verification of sampling and assaying personnel. Not applicable – no drilling completed. Decumentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Not applicable – no drilling completed. Discuss any adjustment to assay data. Not applicable – no drilling completed. Location of data points Discuss any adjustment to assay data. Not applicable. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Location of data points Specification of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this accuracy of topographic control. Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and structure structure structure structure is considered to the wind mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. Not applicable – no drilling. Autits or reviews The results of n	Verification of sampling and assaying personnel. Not applicable – no drilling completed. Decumentation of primary data, data entry procedures, data verification, data storage (physic) and electronic) protocols. Handwritten data collected in the field was transferred into an excel spreadsheet and verified by field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss any adjustment to assay data. Not adjustment to assay data made – not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Data spacing and distribution Data spacing for reporting of Exploration Results. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this gri Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade contruity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. Orientation to geological in relation to geological in relation to geologi	personnel personnel Not applicable - no drilling completed. Decumentation of primary data, data entry procedures, data verification, data storage (physici) Automethation of primary data, data entry procedures, data verification, data storage (physici) Heid geologist, 11 data checked by proposible geologist, 21 data checked by proposible data checked by proposibl		been established.	10 samples. Results of standards and blanks show that assay values are accurate.
Verification of sampling and assaying The use of twinned holes. Not applicable – no drilling completed. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Handwritten data collected in the field was transferred into an excel spreadsheet and verified field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic field geologist. All data checked by responsible geologist and digitally transferred to Perth offic dupits and other locations used in Mineral Resource estimation. Data spacing and distribution Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other location Results. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this deck chip and channel sampling was taken at observed mineral occurrences, areas of known h results, and areas with mineralisation potential. Data spacing and distribution	The use of twinned holes. Not applicable – no drilling completed. assopting and assopting and points The use of twinned holes. Not applicable – no drilling completed. Location of data points Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Dust spacing and distribution Specification of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this gri results, and areas with mineralisation potential. Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and distribution grade compositing has been applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the structure is considered to have introduced a sampling bias, this shoul, considering the deposit type. Not compositing. Orientation to geological in relation to geological If the relationsh	Comparison assign assign assign assign The use of twinned heles. Not applicable - no drilling completed. Inclusion of applicable - no drilling completed. Handwrtten data schede by responsible geologist and digitally transferred to Perth office. Discuss any odulativent to assign data. Not applicable - no drilling completed. Discuss any odulativent to assign data. Not applicable - no drilling completed. Caration of data points Accurap and quality of surveys used to facter drill holes (colin an down-hole surveys). The grid system used is Works and direct and on the origin system assign and direct and work hole surveys). Specification of the grid system used. Topparable control. Topparable control. Quality and data checked by response to response to the second system used. Not applicable - no Mineral Besource and work hole surveys are applicable. Data specing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity apparable is for the Mineral Resource and Dre Reserve estimation proceedure(s) and classifications applied. Not applicable - no Mineral Resource estimation. Orientation of data in rectart to dividing admetation and the orientation of the mineral Resource and the dividing of possible structures and the distribution Not applicable - no dividing. Orientation of data in rectart to dividing admetation and the orientation of they mineral distribution applicable.		The verification of significant intersections by either independent or alternative company	Internal verification of significant results by more than one company geologist.
Samping the assoying Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Handwritten data collected in the field was transferred into an excel spreadsheet and verified field geologist. All data checked by responsible geologist and digitally transferred to Perth offic No adjustment to assay data made – not applicable. Location of data points Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known h results, and areas with mineralisation potential. Orientation of data geological structure Whether sample compositing has been applied. No adjustment to which this is known, considering the deposit type. Orientation of dats If the relationship between the drilling orientation and the orientation of key mineralised and classifications applied. No compositing. Orientation of structure The measures taken to ensure sample security.	Samping the assorying Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Handwritten data collected in the field was transferred into an excel spreadsheet and verified by field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss ony adjustment to assay data. No adjustment to assay data made – not applicable. Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this gri Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known hister results, and areas with mineralisation potential. Not applicable – no Mineral Resource estimation. Orientation of data geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the reported if material. Not compositing. Orientation to geological structure If the relationship between the drilling orientation and the orientation of key mineralised structure is considered to have introduced a sampling bius, this should	assaying assaying assaying assaying Decumentation of primory data, data entry procedures, data verification, data storage (physicat ind electronic) protocols. Hindwritten data collected in the field was transferred into an excel spreadsheer and verified in delectronic) prosponsition gate processitia and digitally transferred to Perth office field gategolist. It data checked by responsitive gategolist and digitally transferred to Perth office field gategolist. It data checked by responsitive gategolist and digitally transferred to Perth office field gategolist. It data checked by responsitive gategolist and digitally transferred to Perth office field gategolist. It data checked by responsitive gategolist and digitally transferred to Perth office field gategolist. It data checked by responsitive gategolist and digitally transferred to Perth office field gategolist. It data checked by the an accuracy of \$5m. Deta spacing data grade continuity appropriate for early-stage supportation. The grid system used is WGSAB UTM Zone 195. All coprited coordinates are referenced to the grade continuity appropriate for the Minesults. Deta spacing of reporting of Exploration Results. Rock chip and channel sampling was taken at Observed mineral occurrence, areas of known hist results, and areas with mineralisation potential. Orientation of add in relation of add relation sappled. Not compositing. Orientation of add relation of the relation scale and use adding adheres without distribution is sufficient to establish the degree of gatelogieal and distribution. Not compositing. Orientation of add relation adheres ad	Verification of	· ·	
and electronic) protocols. field geologist. All data checked by responsible geologist and digitally transferred to Perth office Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Specification of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data geological in relation to geological structures is considered to have introduced a sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. Orientation of data propride for the orientation of sampling achieves unbiased sampling of possible structures and extent to which this is known, considering the deposit type. No compositing. Orientation of data propride finaterial. The reacures taken to ensure sample security. Not applicable – no drilling. Sample security The measures taken to ensure sample security. Not applicable – no drilling. <td>and electronic) protocols. field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this gri results, and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing of Kineral Resource and Ore Resource estimation. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known histo results, and areas with mineralisation potential. Orientation of data grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data geological structure Whether the orientation of sampling the deposi type. No compositing. In relation to geological structure If the relationship between the drilling orientation and the orientation of key mineralised structure Not applicable – no drilling. Sample security The measures taken to ensure sample security. No tapplicable – no drilling.</td> <td>and electronic) protocols. field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss any quality of surveys used to locate drill holes (clater and down-hole surveys). Survey and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and hole and because and hole and because and hole and and surveys). Surveys and quality of surveys used to locate and hole and because and hole and and surveys). Surveys and quality of surveys used to locate and hole and because and hole and and surveys and surveys and surveys and surveys and surveys and down hole surveys and surveys</td> <td>sampling and</td> <td>The use of twinned holes.</td> <td></td>	and electronic) protocols. field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this gri results, and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Whether the data spacing of Kineral Resource and Ore Resource estimation. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known histo results, and areas with mineralisation potential. Orientation of data grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data geological structure Whether the orientation of sampling the deposi type. No compositing. In relation to geological structure If the relationship between the drilling orientation and the orientation of key mineralised structure Not applicable – no drilling. Sample security The measures taken to ensure sample security. No tapplicable – no drilling.	and electronic) protocols. field geologist. All data checked by responsible geologist and digitally transferred to Perth office. Discuss any quality of surveys used to locate drill holes (clater and down-hole surveys). Survey and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and down-hole surveys). Surveys and quality of surveys used to locate drill holes (clater and hole and because and hole and because and hole and and surveys). Surveys and quality of surveys used to locate and hole and because and hole and and surveys). Surveys and quality of surveys used to locate and hole and because and hole and and surveys and surveys and surveys and surveys and surveys and down hole surveys and surveys	sampling and	The use of twinned holes.	
Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Lacation of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Data spacing and distribution of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this a garcing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known heresults, and areas with mineralisation potential. Data spacing and distribution of data first bution of supplied. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data in relation to geological structures is considered to hove introduced a sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the determineralised structures is considered to hove introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in comporting of custors applied.	Discuss any adjustment to assay data. No adjustment to assay data made – not applicable. Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Specification of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this grid system used is working and charped to the grid system used. Data spacing and distribution of the grid system control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No tapplicable – no Mineral Resource estimation. Orientation of data in relation to grade in relation to grade is known, considering the deposit type. No compositing. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del	Discuss any adjustment to assign data. No adjustment to assign data made - not applicable. Lacction of data points Accuracy and quality of surveys used to locate dift holes (calit on down-hole survey). Sample issue were recorded using 6 Garmin Oregon 550 GFS with an accuracy of ±5m. Specification of the grid system used. Quality and adequacy of topographic control. The grid system used is WGSS4 UTM Zone 15S. All reported coordinates are referenced to the ig Specification of the grid system used. Data specing and distribution Whether the data specing of the Winshing a Subara to Specing for the Mineral Resource and Ore Reserve estimation procedure(s) and carsifications spapiled. No compositing was taken a to Specing for the Mineral Resource and Ore Reserve estimation procedure(s) and carsifications spapiled. No compositing. Orientation of data procedure Whether the unitation of spapilic dift the deposit type. No compositing. Orientation of data procedure If the relations applied. No compositing. Sample security The security of any audits or reviews of sampling bias, this should be assessed and reported if material. No campositing. Sample security The measures taken to ensure sampling achieves and the deposit type. No campositing. Sample security The measures taken to ensure sampling bias, this should be assessed and reported if material. Not applicable for early-stage exploration	assaying		
Location of data points Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m. Joints Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this Topographic control is considered appropriate for early-stage exploration Data spacing and distribution as spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the orientation of key mineralised structures and the orientation of key mineralised at the degree of geological and reported if material. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological astructures is considered to have introduced a sampling of possible structures and the orientation of key mineralised structures and the extent to which this is known, considering the deposit type. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compositing the chopingues and data. Multis or reviews The results of onv andits or reviews of sampling techopi	Location of data pointsAccuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m.JointsSepcification of the grid system used.The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this grid Topographic control.Data spacing and distributionData spacing for reporting of Exploration Results.Topographic control is considered appropriate for early-stage explorationData spacing and distributionWhether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.Not applicable – no Mineral Resource estimation.Orientation of data geological structureWhether the data spacing diverse unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.No compositing.In relation to geological structureIf the relationship between the drilling orientation and the orientation of key mineralised structureNot applicable – no drilling.Sample securityThe measures taken to ensure sample security.The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complian with chain of custody documentation provided by SGS.	Lacation of data points Lacation of data points Lacation of data points Lacation of the grid system used. Indexed Resource estimation. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m. Semple sites were recorded using a Garmin Oregon S50 GPS with an accuracy of ±5m.			
Location of data trenches, mine workings and other locations used in Mineral Resource estimation. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing on distribution Data spacing on reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known he results, and areas with mineral Resource estimation. Data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to grade continuity appropriate for the dilling orientation and the orientation of fkey mineralised structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compositing norived by SGS. Audits or reviews The reviews of sampling techniques and data. Not applicable or early-stage explorat	Location of data points trenches, mine workings and other locations used in Mineral Resource estimation. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this grid Quality and adequacy of topographic control. Data spacing and distribution Data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known histor results, and areas with mineralisation potential. Data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structures is considered to which this is known, considering the deposit type. No compositing. Orientation to geological structure size considered to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliar durits on reviews of sampling techniques and data.	Lacation of data points Intencies, mine workings and other lacations used in Mineral Resource estimation. Integrid system used is WGS44 UTM Zone 195. All reported coordinates are referenced to thig go Quality and abeyacy of tapparaphic control is considered appropriate for early-stage exploration Data spacing and distribution The grid system used is WGS44 UTM Zone 195. All reported coordinates are referenced to thig go Quality and abeyacy of tapparaphic control is considered appropriate for early-stage exploration Data spacing of a point of points of Skploration Results. Rock thip and channel sampling was taken at observed mineral occurrences, areas of known hist results, and areas with mineralisation potential. Ordenation of data grade continuity appropring for beam applied. Not applicable – no Mineral Resource estimation. Ordenation of data grade continuity appropring for beam applied. No compositing. Ordenation of data grade continuity appropring for sporting of possible structures and the extent to which this is known, considering the deposit type. No compositing. Ordenation of data geological If the relationship between the drilling orientation and the crientation of key mineralised structures No tapplicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru SAC. sample preparation facility and in complia with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techni			
points Specification of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological al structure is considered to have introduced a sampling of possible structures and the event to which this is known, considering the deposit type. No compositing. Sample security The measures taken to ensure sample security. Not applicable – no drilling. Audits or reviews The reviews of sampling techniques and data. Not applicable – no drilling.	points Specification of the grid system used. The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this grid Quality and adequacy of topographic control. Data spacing and distribution Data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known histor results, and areas with mineralisation potential. Data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological and structures is considered to whis is known, considering the deposit type. No compositing. geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which his is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. geological structure If the reasures taken to ensure sample security. No tapplicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliar with chain of custody documentation provided by SGS.	points Experison of the grid system used. The grid system used is WGS84 UTM Zone 195. All reported coordinates are referenced to this grid Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing for reporting of Exploration Results. Rock Chip and channel sampling was taken a observed mmeral accurrences, areas of known hist results, and areas with mineralisation potential. Not applicable – no Mineral Resource estimation. Orientation of due orientation Sympler Whether sample compositing the see applied. Not applicable – no Mineral Resource estimation. Orientation of due orientation of sampling achieves unbiased sompling of possible structures and the in relation to geological structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The results of any audits or reviews of sampling techniques and data. Not applicable – no drilling. Addits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable – no drilling.	Location of data		Sample sites were recorded using a Garmin Oregon 550 GPS with an accuracy of ±5m.
Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known h results, and areas with mineralisation potential. Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the orientation of key mineralised in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the orientation of key mineralised structure All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in comp with chain of custody documentation provided by SGS.	Quality and adequacy of topographic control. Topographic control is considered appropriate for early-stage exploration Data spacing and distribution Data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known histor results, and areas with mineralisation potential. Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complian with chain of custody documentation provided by SGS.	Quality and adeguagy of tapographic control. Topographic control is considered appropriate for early-stage exploration Data spacing for reporting of Exploration Results. For early stage exploration is sufficient to estabilish the degree of geological and distribution and distribution is sufficient to estabilish the degree of geological and distribution. Not applicable - no Mineral Resource estimation. Orientation of data Whether the data spacing and distribution is sufficient to estabilish the degree of geological and areas with mineralisation potential. No compositing. Orientation of data Whether subject compositing has been applied. No compositing. Orientation of data Whether subject compositing and distribution of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling of possible structures and the orientation of sampling achieves unbiased sampling bits, this should be assessed and reported if the relationship between the drilling orientation and sampling bits, this should be assessed and reported if material. All channel samples were oriented perpendicular to the tend of mineralized structures and the orientation of sampling achieves tand the orientation of sampling achieves tand the ori	points		The grid system used is WGS84 UTM Zone 19S. All reported coordinates are referenced to this grid.
Data spacing and distribution Data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known h results, and areas with mineralisation potential. Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data geological Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. If the relationship between the drilling orientation and the orientation of key mineralised structure If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The results of any audits or reviews of sampling techniques and data	Data spacing and distribution Data spacing for reporting of Exploration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known histor results, and areas with mineralisation potential. Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. If the relationship between the drilling orientation and the orientation of key mineralised structure Not applicable – no drilling. Sample security The measures taken to ensure sample security. The results of any audits or reviews of sampling techniques and data	Data spacing and distribution Data spacing for reporting of Expiration Results. Rock chip and channel sampling was taken at observed mineral occurrences, areas of known his results, and areas with mineralisation potential. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and dissributions. Not applicable - no Mineral Resource estimation. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the avent to which this is known, considering the deposit type. No compositing. Sample security The measures taken to ensure sample secure oriented perpendicular to the trend of mineralized structures where identified or within mineralised ithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. Not applicable - no drilling. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration			
Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structures Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. Orientation to geological structures If the relationship between the drilling orientation and the orientation of key mineralised structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compositing norientation provided by SGS. Audits or reviews The results of any undits or reviews of sampling techniques and data. Not applicable for early-stage exploration	Data spacing and distribution whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the set to which this is known, considering the deposit type. No compositing. Orientation to geological structures If the relationship between the drilling orientation and the orientation of key mineralised structures and the structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliar with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable or evolvestion	Date spacing and distribution Interface the data spacing and distribution is sufficient to establish the degree of geological and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data geological structures Whether the data spacing and distribution is sufficient to establish the degree of geological and classifications applied. No compositing. Orientation of data geological structures Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the degosit type. No tapplicable – no diffing. geological structures if the relationship between the diffing orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complice with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration			
Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. Orientation to geological structure If the relationship between the drilling orientation and the orientation of key mineralised treported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The results of any audits or reviews of sampling techniques and data Audits or reviews The results of any audits or reviews of sampling techniques and data Not applicable for early-stage exploration	Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Not applicable – no Mineral Resource estimation. Orientation of data in relation to geological Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. No compositing. Orientation to geological structure If the relationship between the drilling orientation and the orientation of key mineralised trop the deposit type. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The results of any audits or reviews of sampling techniques and data Audits or reviews The results of any audits or reviews of sampling techniques and data Not applicable for early-stage exploration	Data spacing and distribution Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No to applicable – no Mineral Resource estimation. Orientation of geological structures is considering the deposit type. No compositing. If the relationship between the drilling orientation and the orientation of geological structures is considered to hove introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. Not applicable for early-stage exploration facility and in complia with chain of custody documentation provided by SGS. Audts or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration			
distribution grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. If the relationship between the drilling orientation and the orientation of key mineralised structure No tapplicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in comp with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	distribution grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. If the relationship between the drilling orientation and the orientation of key mineralised structure Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliar with chain of custody documentation provided by SGS.	distribution grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. No compositing. Orientation of data in relaton to geological structures is considered to have introduced a sampling bios, this should be assessed and reported if material. No compositing. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. Sample security The measures token to ensure sample security. Not applicable – no drilling. Sample security The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration		Whether the data spacing and distribution is sufficient to establish the degree of geological and	
Whether sample compositing has been applied. No compositing. Orientation of data in relation to geological structures and the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. geological structure If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compositing no custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	Whether sample compositing has been applied. No compositing. Orientation of data in relation to geological structures and the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. geological structure If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliar with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	Mether sample compositing has been applied. No compositing. Orientation of data in relation of a sampling achieves analyting of possible structures and the investion of sampling achieves analyting of possible structures and the actent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. geological structures is considered to hove introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complia with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	distribution	grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s)	
Orientation of data in relation of data in relation to geological structures Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. geological structure If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in composite to have introduced by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early stage exploration	Orientation of data in relation of data in relation to geological structures Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized structures where identified or within mineralised lithological units such as agglomerates or autobreccias. geological structure If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complian with chain of custody documentation provided by SGS.	Orientation of data in relation to geological structure Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. All channel samples were oriented perpendicular to the trend of mineralized identified or within mineralised lithological units such as agglomerates or autobreccias. If the relationship between the drilling pointation and the orientation of key mineralised structure Not applicable - no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complica with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration		and classifications applied.	
One induction of balance extent to which this is known, considering the deposit type. identified or within mineralised lithological units such as agglomerates or autobreccias. in relation to geological if the relationship between the drilling orientation and the orientation of key mineralised Not applicable – no drilling. structure structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in composite curves of sampling techniques and data. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	One intraction of battal in relation to geological structure extent to which this is known, considering the deposit type. identified or within mineralised lithological units such as agglomerates or autobreccias. If the relationship between the drilling orientation and the orientation of key mineralised structure Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliant with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	in relation to define to which this is known, considering the deposit type. identified or within mineralised lithological units such as agglomerates or autobreccias. in relation to define the which this is known, considering the deposit type. Not applicable – no drilling. structure the relationship between the drilling orientation of key mineralised introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complice with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration		Whether sample compositing has been applied.	No compositing.
in relation to geological structure extent to which this is known, considering the deposit type. identified or within mineralised lithological units such as agglomerates or autobreccias. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in comp with chain of custody documentation provided by SGS. Audits or reviews The results of any qudits or reviews of sampling techniques and data Not applicable for early stage exploration	in relation to geological structure extent to which this is known, considering the deposit type. identified or within mineralised lithological units such as agglomerates or autobreccias. If the relationship between the drilling orientation and the orientation of key mineralised structure Not applicable – no drilling. structure structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Not applicable – no drilling. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliant with chain of custody documentation provided by SGS. Audits or reviews The results of any qudits or reviews of sampling techniques and data Not applicable for early stage exploration	in relation to geological structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Sample security Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	Orientation of data	Whether the orientation of sampling achieves unbiased sampling of possible structures and the	All channel samples were oriented perpendicular to the trend of mineralized structures where
structure structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Sample security The measures taken to ensure sample security. Audits or reviews The results of any audits or reviews of sampling techniques and data	structure structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Sample security The measures taken to ensure sample security. Audits or reviews The results of any audits or reviews of sampling techniques and data	structures structures is considered to have introduced a sampling bias, this should be assessed and reported if material. Sample security The measures taken to ensure sample security. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration		extent to which this is known, considering the deposit type.	identified or within mineralised lithological units such as agglomerates or autobreccias.
reported if material. Sample security The measures taken to ensure sample security. Audits or reviews The results of any audits or reviews of sampling techniques and data	reported if material. Sample security The measures taken to ensure sample security. Audits or reviews The results of any audits or reviews of sampling techniques and data	reported if material. reported if material. Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complia with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	geological	If the relationship between the drilling orientation and the orientation of key mineralised	Not applicable – no drilling.
Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in composite views of sampling techniques and data. Audits or reviews The results of any qudits or reviews of sampling techniques and data. Not applicable for early stage exploration	Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliar with chain of custody documentation provided by SGS. Audits or reviews The results of any qudits or reviews of sampling techniques and data Not applicable for early-stage exploration	Sample security The measures taken to ensure sample security. The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in complia with chain of custody documentation provided by SGS. Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration			
with chain of custody documentation provided by SGS.	with chain of custody documentation provided by SGS.	Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration		reported if material.	
Audits or reviews The results of any audits or reviews of sampling techniques and data Not applicable for early-stage exploration	Audits or reviews The results of any audits or reviews of sampling techniques and data Not applicable for early-stage exploration	Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	Sample security	The measures taken to ensure sample security.	The samples were delivered to the SGS del Peru S.A.C. sample preparation facility and in compliance
Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration	Audits or reviews The results of any audits or reviews of sampling techniques and data. Not applicable for early-stage exploration				
			Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Not applicable for early-stage exploration
			Audits of reviews	The results of any dualts or reviews of sampling techniques and data.	Not applicable for early-stage exploration



SECTION 2 REPORTING OF EXPLORATION RESULTS (Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Aineral tenement Ind land tenure tatus	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The Picha Project comprises 24 Mining Concessions, 22 of which are 100% owned by Kiwanda S.A.C, a wholly-owned Peruvian subsidiary of Valor Resources. There are another 2 mining concessions to which Kiwanda S.A.C has exclusive rights. The Picha project is located 127km SW of the City of Juliaca, in southern Peru, and near the village of Jesus Maria in the San Antonio de Esquilache district, province of Sanchez Cerro and the Moquegua department.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area	At the Picha Project 13 mining concessions are currently granted and another 11 are currently awaiting grant. All mining concessions are in good standing with no known impediments.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	At Picha Project exploration was previously completed on the Picha project area by several companies including Minera Teck Peru S.A., Minera del Suroeste S.A.C, Maxy Gold Corp and most recently Lara Exploration Ltd. These companies completed surface geochemical sampling and geophysics, including an Induced Polarization survey. Lara Exploration and Maxy Gold Corp proposed drilling programs to test the five target areas, but the drilling was never implemented.
Geology	Deposit type, geological setting and style of mineralisation.	At Picha mineralisation is considered similar to other copper-silver stratabound deposits in Peru and Chile hosted mainly in andesitic volcanics. Further exploration work is required to test this model. The project area is covered mostly by andesite lava flows, basaltic andesites, tuffs and agglomerates of the Tacaza Group. These rocks are unconfomably overlain by lacustrine sediment made up of sandstones, limolites, shales, limestones and some intercalations of andesites, rhyolit and reworked tuffs of the Maure Group of Miocene age. While most of the copper mineralisation hosted by the Tacaza Group, some copper mineralisation also reaches the level of the Maure Group rocks. The potential for low sulphidation epthermal and porphyry related mineralisation has now been recognised at the Picha Project through work carried out by Valor in 2022
Drill hole nformation	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. 	Not applicable – no drilling completed.
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	Not applicable – no drilling completed.
	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be	For reporting of channel samples, weighted averages were applied, no lower cut-offs and no cutting of high grades were applied. This is considered appropriate for the style of sampling used



Criteria	JORC Code explanation	Commentary
Data aggregation methods	stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	and early stage of exploration. Not applicable – no aggregation completed.
Relationship between	The assumptions used for any reporting of metal equivalent values should be clearly stated. These relationships are particularly important in the reporting of Exploration Results.	No metal equivalents reported. Not applicable – no drilling.
mineralisation widths and	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	Not applicable – no drilling.
intercept lengths	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	Not applicable – no drilling.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Refer to Figures above in body of text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All rock chip sample/channel sample results reported in tables above.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	No other relevant exploration data to report for Picha Project. All relevant data has been reported in previous Company ASX announcements.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).	 Further work on the Picha Project will include: Diamond drilling of geophysical and geochemical targets Geological mapping and geochemical sampling of new targets Ground geophysics survey of Ichucollo and Huancune target areas.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Refer to Figures above in body of text.

SECTION 3 ESTIMATION AND REPORTING OF MINERAL RESOURCES

Not applicable.

SECTION 4 ESTIMATION AND REPORTING OF ORE RESERVES

Not applicable.

ASX:VAL