

19 September 2022

## GRAPHITE MINERALISATION DISCOVERED OUTSIDE ALREADY GIANT RESOURCE

Sarytogan Graphite Limited (ASX: SGA, "the Company" or "Sarytogan") is pleased to report further drilling results from the Sarytogan Graphite Deposit in Central Kazakhstan.

### Highlights

- Thick high-grade graphite intercepts returned in four diamond drill holes to the north-east of the Central Graphite Zone (CGZ) and outside the **209Mt @ 28.5% TGC** Inferred Mineral Resource<sup>1</sup>. Significant intercepts above 20% TGC include:
  - ST-71 returned a total of **133.9m** of graphite mineralisation in separate intervals including:
    - **5.8m @ 26.4%** TGC from 41.4m; and
    - **10.7m @ 20.6%** TGC from 56.2m; and
    - **36.1m @ 27.2%** TGC from 142.0m incl. **12.9m @ 35.8%**; and
    - **29.1m @ 23.1%** TGC from 189.7m; and
    - **The hole was abandoned in graphite mineralisation at 218.8m.**
  - High-grade graphite was returned from surface in ST-70 and included:
    - **14.3m @ 28.5%** TGC from surface; and
    - **32.5m @ 32.0%** TGC from 57.3m incl. **8.2m @ 35.6%** TGC; and
    - **20.7m @ 24.8%** TGC from 123.7m.
  - High-grade graphite was intersected in ST69 and redrill ST-69A including:
    - **8.0m @ 27.5%** TGC from 11.8m in ST-69
    - **17.9m @ 23.9%** TGC from 8.7m incl. **5.5m @ 38.3%** in ST-69A.
- Plus, more high-grade graphite results from within the CGZ:
  - High-grade graphite from surface in ST-68:
    - **22.9m @ 29.9%** TGC from surface incl. **15.8m @ 36.1%** TGC; and
    - **30.8m @ 31.7%** TGC from 73.1m incl. **19.6m @ 36.9%** TGC.
  - Extremely-high-grade individual assay of **2m @ 53.9%** TGC in ST-67:
    - **21.6m @ 35.6%** TGC from 6.1m incl. **13.8m @ 43.8%** TGC incl. **2m @ 53.9%** TGC.
- Assays are pending from drilling more intensively metamorphosed rocks in the CGZ. Further drilling is underway within the CGZ and also to the north and south of the NGZ.
- Drilling is on track to be completed by November 2022 to enable an updated Mineral Resource Estimate in Q1 2023.
- Metallurgical testwork is underway at labs in Australia and Germany.

<sup>1</sup> See Prospectus dated 23 February 2022, published on the ASX on 14 July 2022.

For personal use only



Figure 1 - High-grade graphite at 170m in ST-71 to the north-east of the CGZ

Sarytogan Managing Director, Sean Gregory commented:

*"These exceptional drilling results are continuing to expand what is already a giant graphite deposit. Sarytogan's systematic approach is characterising the entire deposit area to identify the best location to be selected for future mining studies."*

24 holes for 1,937m have been drilled this year as at 12 September 2022. The results reported here as well as the locations of the drill holes with pending assays are shown in Table 1 towards the end of this announcement.

### Drilling Results Outside of the Mineral Resource Estimate Area

Drilling has now successfully targeted the granite-graphite contact zone observed in outcrop to the north-east of the established Mineral Resource Estimate of the CGZ (Figure 2). This granite intrusion is understood to be the heat source for the contact metamorphism that enriched the graphitic shales to graphite mineralisation. Surprisingly, the graphite mineralisation encountered here extended to depths of greater than 200m.

As these results extend up 300m north of the previous known extent of the mineralisation and with the significant depths encountered, they have the potential to extend the already giant Inferred Mineral Resource of **209Mt @ 28.5% TGC**<sup>1</sup>.

For personal use only



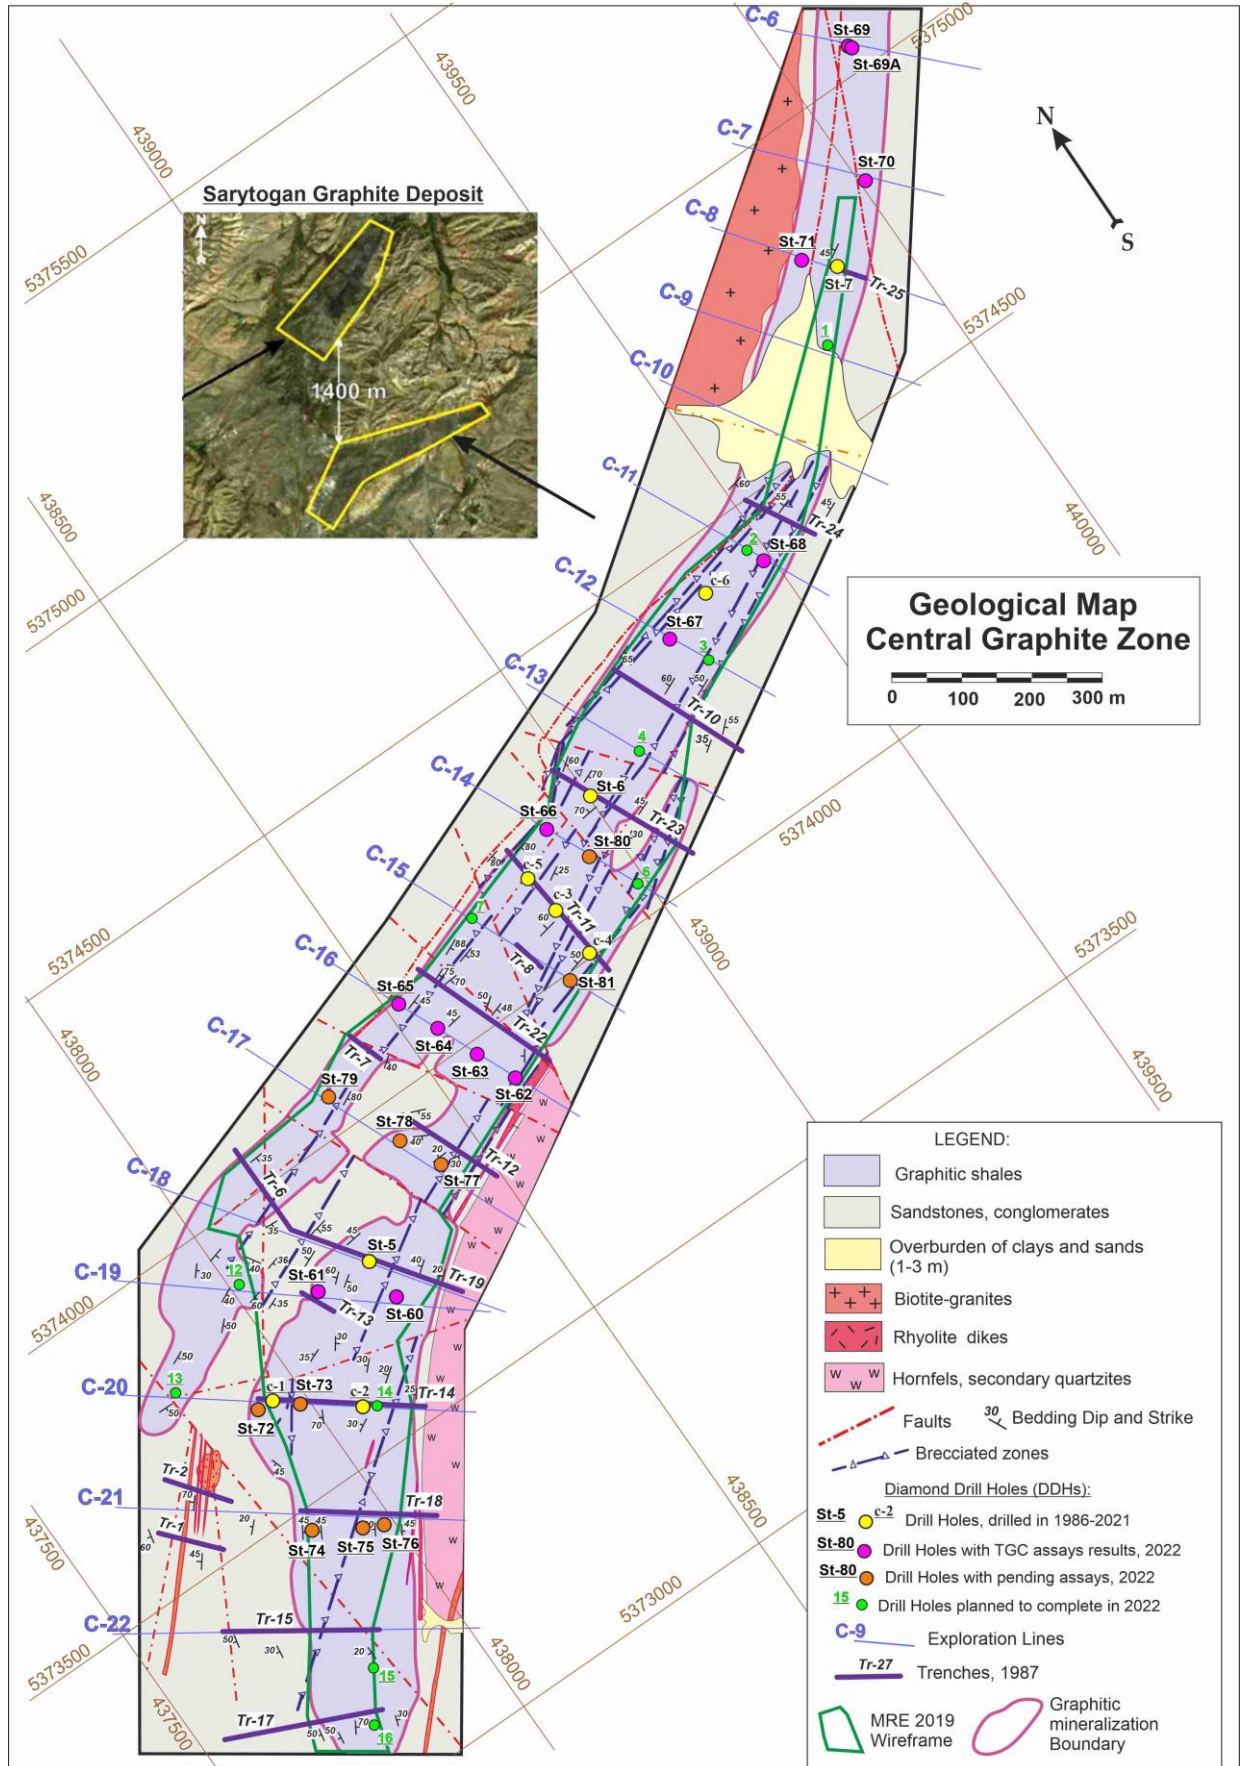


Figure 2 - Completed and Planned Diamond Drilling at the CGZ.

For personal use only



## Further High-Grade Results from the Central Graphite Zone

Assays have been received for St-67 and St-68 within the CGZ and build on excellent results announced to the ASX on 15<sup>th</sup> August 2022.

St-67 and St-68 both returned thick high-grade intercepts. An exceptional individual assay result of **2m @ 53.9%** TGC within a broader intercept of **21.6m @ 35.6%** TGC in ST-67 indicates the potential for extremely-high-grade mineralisation to occur in future drilling discoveries at the Sarytogan Graphite Deposit.

## Pending Results and Further Drilling

**CGZ Metamorphism:** Assays are pending from completed drill holes in the south of the CGZ (Figure 2; ST-72 to ST-76). Identification of more intense contact metamorphism in this area, as evidenced by the presence of muscovite, sericite, tourmaline, and turquoise minerals in outcrop, suggests the potential for well-developed graphite mineralisation in this area.

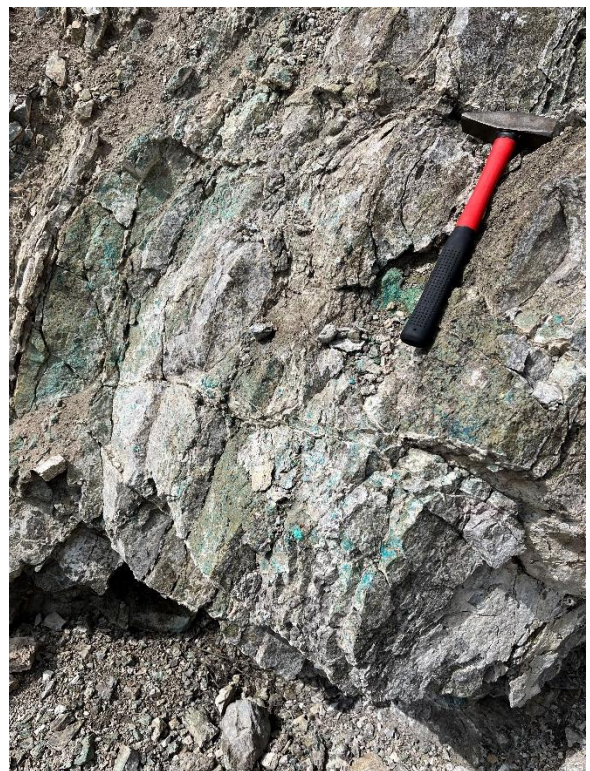


Figure 3 – Tourmaline crystals (LHS) and turquoise (RHS) observed in footwall meta-sandstones at the CGZ.

**CGZ Infill drilling:** 200m spaced drill lines are planned across the remainder of the CGZ.

**NGZ Extensional drilling:** 5 drill holes are planned to extend the NGZ both to the south and north (Figure 4).

For personal use only



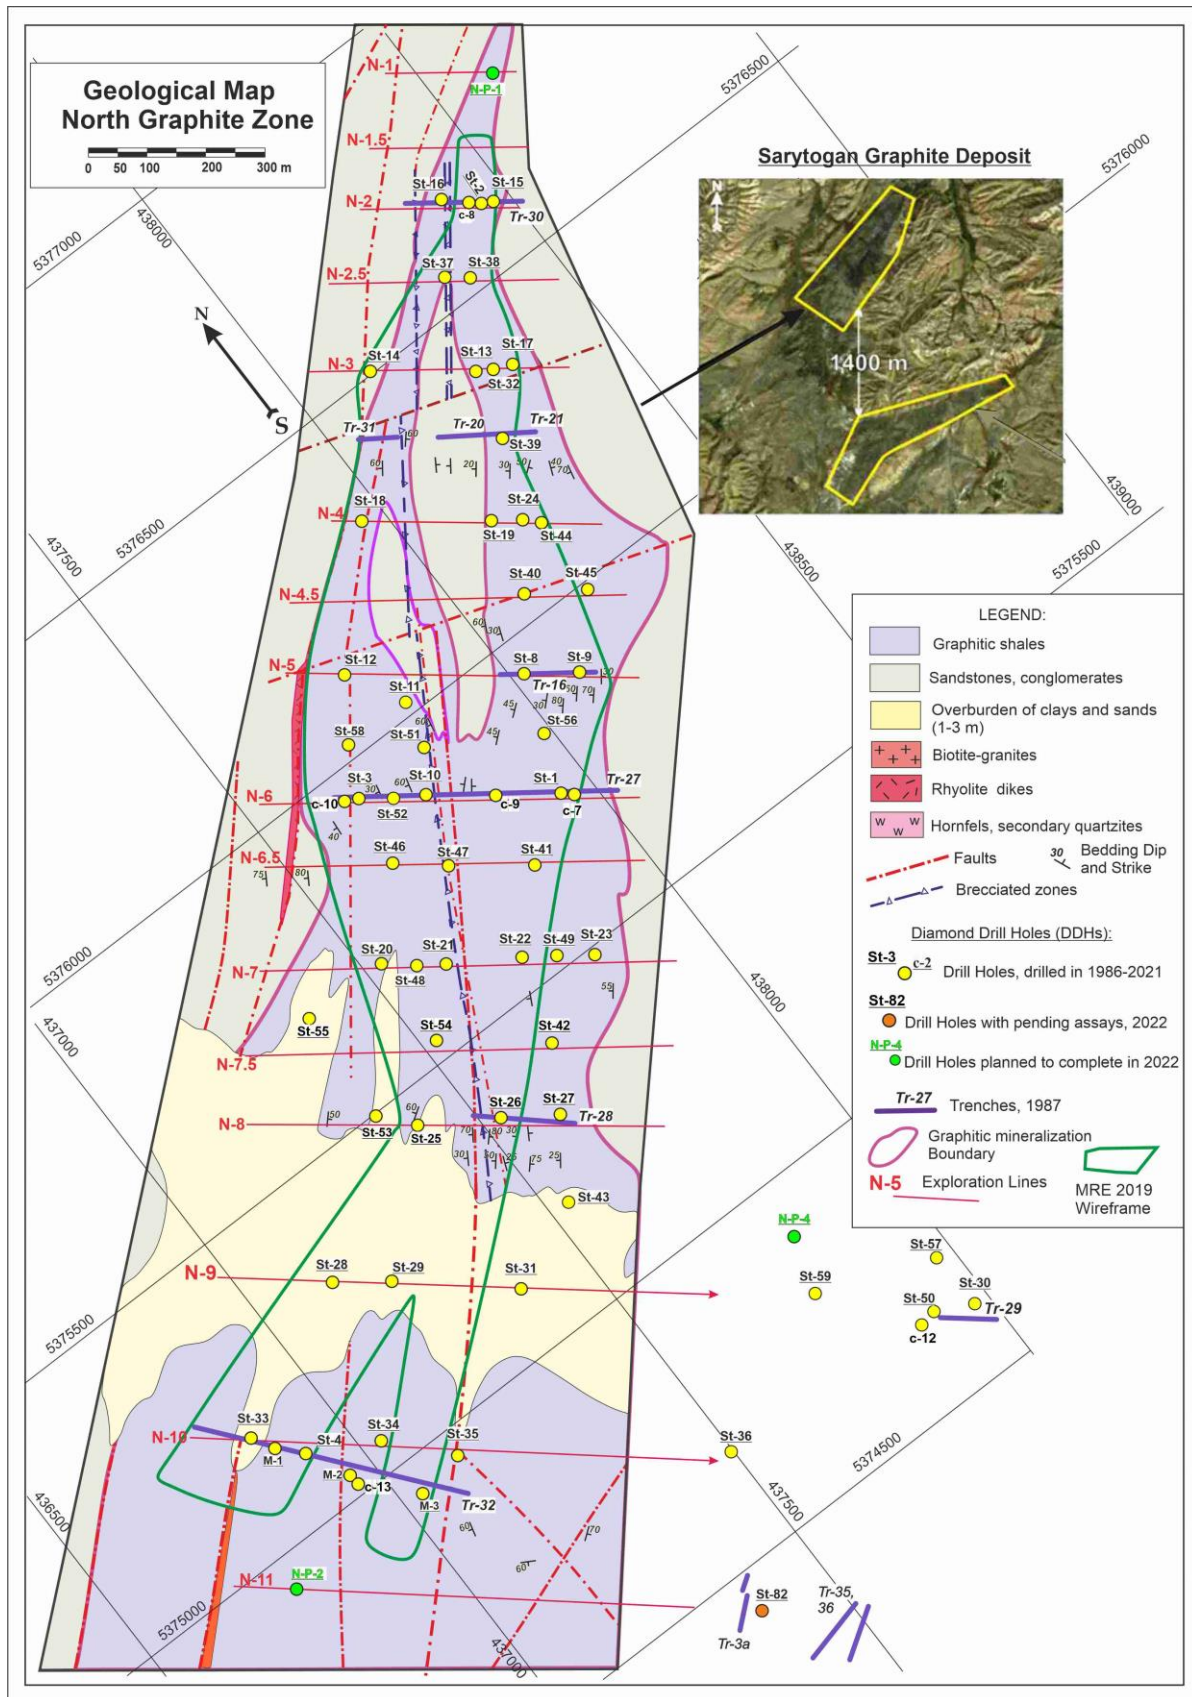


Figure 4 - Completed and Planned Diamond Drilling at the CGZ.

For personal use only

## Next Steps for the Sarytogan Graphite Project

### Drilling

The addition of the second diamond drill rig (refer ASX Announcement 1 September 2022) has seen productivity improvements on site and the drilling program is forecast to be completed by November 2022. This will enable the Mineral Resource Estimate to be updated in Q1 2023, targeting some areas for reporting at the higher Indicated Mineral Resource classification.

### Metallurgy

Metallurgical test-work including floatation, sintering/roasting, and leaching has commenced at laboratories in Australia and Germany aimed at replicating the historical results where purities of up to 98.6% have been reported (refer Prospectus dated 23 February 2022, published on the ASX on 14 July 2022).

**This announcement is authorised by the Board of Directors of the Company.**

**Sean Gregory**

**Managing Director**

Table 1 – Drilling Results from the Sarytogan Graphite Deposit.


Hole	Easting	Northing	RL	Depth	From	Thickness	Grade	Inc	Grade
	WGS 84	WGS 84	mASL	m	m	m	% TGC	m	% TGC
ST-60 to ST-66 – reported previously; refer ASX Announcement 15 August 2022									
ST-67	439280	5374376	930	96	6.1	21.6	35.58	13.8	43.81
								2.0	53.85
					30.6	14.1	16.56		
					62.6	3.6	10.99		
					72.7	9.4	12.87		
ST-68	439490	5374392	924	141	0	22.9	29.93	15.8	36.05
					73.1	30.8	31.69	19.6	36.86
					123.9	4.8	20.43		
ST-69	440122	5375040	919	41.6	11.8	8	27.45		
ST-69A	440122	5375039	919	65.5	8.7	17.9	23.89	5.5	38.34
ST-70	440016	5374834	910	154.3	0	14.3	28.46		
					57.3	32.5	31.98	8.2	35.6
					123.7	20.7	24.75		
ST-71	439867	5374765	908	218.8	25.9	8.7	10.43		
					41.4	5.8	26.36		
					56.2	10.7	20.63		
					71.2	22	14.87		
					117	21.5	19.36		
					142	36.1	27.15	12.9	35.77
					189.7	29.1	23.10		
					*ending in mineralisation at 218.8m				
ST-71A	439844	5374783	933	7.7	collared in granite and terminated				

Hole	Easting	Northing	RL	Depth	From	Thickness	Grade	Inc	Grade
ST-72	437935	5373686	903	95.8	Results Pending				
ST-73	437986	5373652	907	64.8					
ST-74	437881	5373452	899	93					
ST-75	437957	5373408	901	53					
ST-76	437990	5373392	906	34.3					
ST-76A	438008	5373377	899	20.9					
ST-77	438425	5373854	912	106.6					
ST-78	438392	5373947	921	30.3					
ST-79				62.7					
ST-80				70.5					
ST-81					Drilling in Progress				
ST-82									

Intervals are reported at a 10% TGC cut-off with up to 2m internal dilution. Higher-grade 'inc' zones are reported at a 35% cutoff, minimum thickness of 4m and up to 6m internal dilution.

## About Sarytogan

The Sarytogan Graphite Deposit is located in the Karaganda region of Central Kazakhstan. It is 190km by highway from the industrial city of Karaganda, the 4<sup>th</sup> largest city in Kazakhstan (Figure 5).

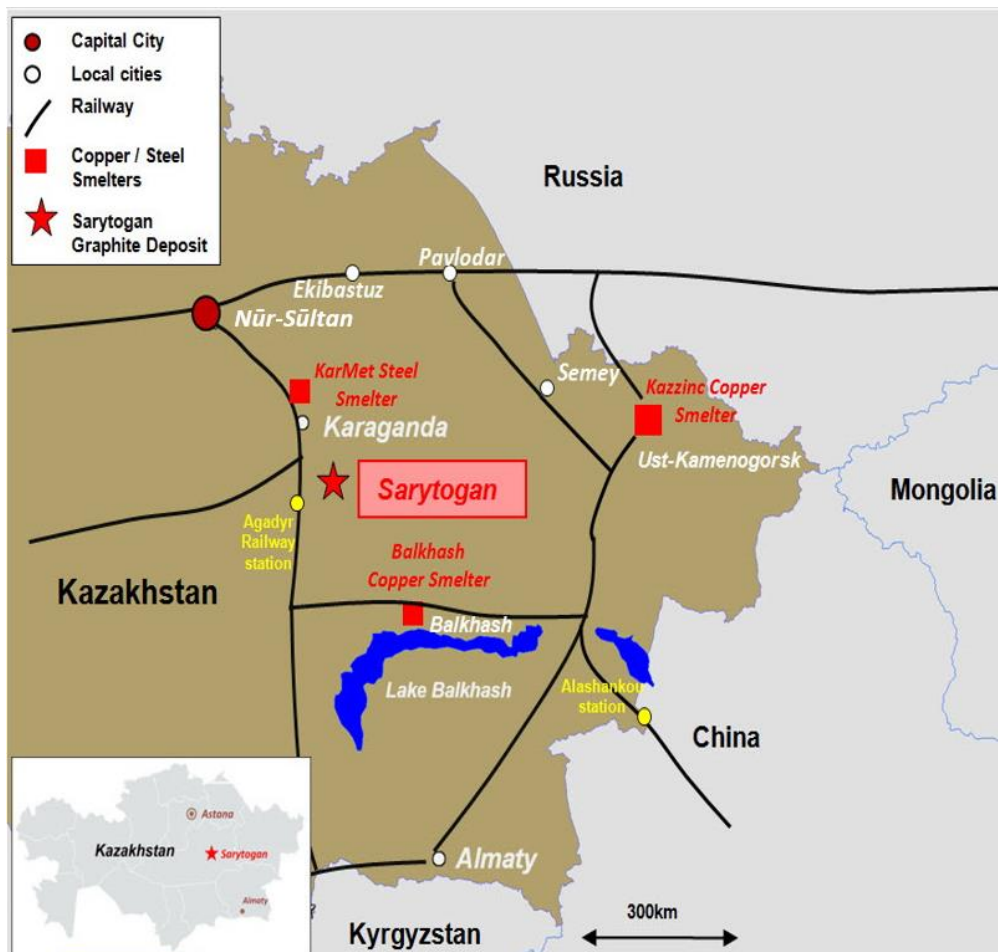

For personal use only

Figure 5 - Sarytogan Graphite Deposit location

## Previous Exploration

The Sarytogan Graphite Deposit was first explored during the Soviet era in the 1980s with sampling by trenching and diamond drilling. Metallurgical test work utilising floatation, sintering, and leaching successfully produced graphite concentrate of up to 98.6% purity (reported in the 23 February 2022 Prospectus). Further testing is planned and underway to validate these historical results.

Diamond drilling and surface sampling resumed after a 30-year hiatus in 2019 that enabled the estimation of an Inferred Mineral Resource of **209Mt @ 28.5% TGC for 60Mt contained graphite** by CSA Global (Table 2).

Table 2 - Sarytogan Graphite Deposit Inferred Mineral Resource (cut-off grade of 15%). Refer to Prospectus dated 23 February 2022, published on the ASX 14 July 2022, for full details of the Mineral Resource Estimate.

Zone	JORC Classification	In-Situ Tonnage (Mt)	Total Graphitic Carbon (TGC %)	Contained Graphite (Mt)
North	Inferred	159	28.8	46
Central	Inferred	49	27.5	14
<b>Total</b>	<b>Inferred</b>	<b>209</b>	<b>28.5</b>	<b>60</b>

## Competent Person's Statement

The information in this report that relates to JORC estimates of Mineral Resources and 2021 Exploration Results was first reported in the Prospectus dated 23 February 2022 available at [www.asx.com.au](http://www.asx.com.au). The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcement and, in the case of estimates of Mineral Resources, that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed. The company confirms that the form and context in which the Competent Persons' findings are presented have not been materially modified.

The information in this report that relates to 2022 Exploration Results is based on information compiled by Dr Waldemar Mueller, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Dr Mueller is a full-time employee of the Company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Dr Mueller consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.



## JORC Code, 2012 Edition – Table 1

### Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p><i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i></p>	<p>Half core was sampled. Sample length within graphitic rocks is primarily 2 m or less depending on the lithology.</p>
Drilling techniques	<p><i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i></p>	<p>Core drilling was completed by an XY-44T drill rig mounted on wheel-based mobile trailed platforms and equipped with a smooth-bore drill with a detachable core receiver of the Boart Longyear system equipped with double core tubes.</p> <p>Pre-drilling is completed with carbide crowns with a diameter of 112-132 mm to a depth of 2-4 m, followed by</p>

For personal use only

Criteria	JORC Code explanation	Commentary
		<p>casing. Drilling is carried out using a removable core receiver and HQ diamond crowns (diameter 96 mm), in rare cases, in complex geological conditions, diameter was reduced to NQ size (diameter 76 mm). Water was used as a washing liquid, and polymer solutions were used at absorption sites.</p> <p>All drill holes are vertical. At the completion of a drill hole, downhole survey is carried using a MIR-36 inclinometer with measurements every 20 m.</p>
<i>Drill sample recovery</i>	<p><i>Method of recording and assessing core and chip sample recoveries and results assessed.</i></p> <p><i>Measures taken to maximise sample recovery and ensure representative nature of the samples.</i></p> <p><i>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i></p>	<p>To maximise core recovery, double tube HQ and NQ core drilling was used, with the drilling utilising drillers experienced in drilling difficult ground conditions. Drill penetration rates and water pressure were closely monitored to maximise recovery.</p> <p>During the diamond drilling the length of each drill run and the length of sample recovered was recorded by the driller (driller's recovery). The recovered sample length was cross checked by the geologists logging the drill core and recorded as the final recovery.</p> <p>Average core recoveries are greater than 98%.</p> <p>At present, no relationships between sample recovery and grade bias due to loss/gain of fines or washing away of clay material has been identified. It is assumed that the grade of lost material is similar to the grade of the recovered core.</p>
<i>Logging</i>	<p><i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation,</i></p>	<p>All logging is completed on paper and later transferred to a digital media.</p> <p>The core documentation includes information on the length of the drill</p>

For personal use only

Criteria	JORC Code explanation	Commentary
	<p><i>mining studies and metallurgical studies.</i></p> <p><i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></p> <p><i>The total length and percentage of the relevant intersections logged.</i></p>	<p>runs, drilling diameter, core recovery and sampling intervals. Special attention was paid to the zones of graphitised rocks, lithology, alteration and mineralisation, the orientation of quartz veins and veinlets were studied in detail.</p> <p>All drill core is digitally photographed and completed in separate room using a specially designed stand that provides a fixed angle. The camera positioned at the same distance from the stand. The core is photographed in 2 stages before sawing and then after sawing. The most interesting samples are photographed at close distances.</p> <p>A collection of representative samples is used during logging to provide consistency with descriptions</p>
<p><i>Sub-sampling techniques and sample preparation</i></p>	<p><i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></p> <p><i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></p> <p><i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></p> <p><i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></p> <p><i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></p> <p><i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></p>	<p>Half core was sampled for assay. Sample length within graphitic rocks is primarily 2 m or less depending on the lithology. The sample length in the barren rocks is 3 m. Half of the core is taken for sampling.</p> <p>Most core was cut using an electric diamond saw and some more friable intervals were split manually. All core for sampling was pre-marked with the cut line, and only one side of the core was sent for assay to maintain consistency.</p> <p>The core sampling was generally at a 2 m interval, refined to match logged lithology and geological boundaries. A minimum sample length of 0.5 m was used.</p> <p>The quality of sampling is checked by comparing geological documentation and samples.</p>
<p><i>Quality of assay data</i></p>	<p><i>The nature, quality and appropriateness of the assaying and laboratory</i></p>	<p>All samples are dried, weighed, crushed and milled in accordance with</p>

For personal use only



Criteria	JORC Code explanation	Commentary
<p>and laboratory tests</p>	<p><i>procedures used and whether the technique is considered partial or total.</i></p> <p><i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></p> <p><i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></p>	<p>the sample preparation scheme.</p> <p>Sample preparation control is carried out using blank samples, taking duplicates from crushing rejects. The quality control of the sample abrasion is performed using the “dry” screening method through a sieve with a mesh size of 0.075 mm. Passing of the milled material is more than 95%. After preparing each sample, all tools and tables are thoroughly cleaned with compressed air. As soon as a batch of samples is prepared, glass is passed through the crushers. The pulverisers are cleaned with quartz sand. Quality of sample preparation is good.</p> <p>Analytical studies are carried out in the chemical-analytical laboratory of LLC Stewart Assay and Environmental Laboratories, located in Karabalta, Kyrgyzstan (Certificate No. RU 181163 of 10/21/2001 and Certificate No. RU 227186 of 08/25/2008). The main type of analytical method is to determine the content of graphite carbon. All samples are subjected to technical tests for the analysis of graphite carbon.</p> <p>Some samples (about 5%) are also given for multi-element analysis.</p> <p>Analysis of graphite carbon (SE / C11 analysis code) is performed on a Leco analyser after pre- treatment. The method of determination was developed by the laboratory in advance and provides reliable values for total graphitic carbon (TGC).</p> <p>Quality control (QC) samples were submitted with each assay batch (certified reference standards, certified reference standard blanks and duplicate samples). The laboratory inserted their own quality</p>

For personal use only

Criteria	JORC Code explanation	Commentary
		assurance/quality control (QAQC) samples as part of their internal QAQC. All assay results returned were of acceptable quality based on assessment of the QAQC assays.
Verification of sampling and assaying	<p><i>The verification of significant intersections by either independent or alternative company personnel.</i></p> <p><i>The use of twinned holes.</i></p> <p><i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></p> <p><i>Discuss any adjustment to assay data.</i></p>	<p>Visual validation of mineralisation against assay results was undertaken for several holes.</p> <p>All diamond drill core samples were checked, measured and marked up before logging in a high level of detail.</p> <p>The diamond drilling, sampling and geological data were recorded on paper into standardised templates and transferred to Microsoft Excel by the logging/sampling geologists. Geological logs and associated data were cross checked by the supervising Project Geologist.</p> <p>Laboratory assay results were individually reviewed by sample batch and the QC results checked before uploading. All geological and assay data were uploaded into Excel. This data was then validated for integrity visually and by running systematic checks for any errors in sample intervals, out of range values and other important variations.</p> <p>All drill core was photographed with corrected depth measurements before sampling.</p> <p>Mineralisation observed was entirely compatible with reported assays in both drill core.</p> <p>No specific twin holes were drilled; however, some recent drill holes were placed and drilled close to the historical holes. Similar grades and distribution were observed in the recent</p>

For personal use only

Criteria	JORC Code explanation	Commentary
		drill holes.
Location of data points	<p>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</p> <p>Specification of the grid system used.</p> <p>Quality and adequacy of topographic control.</p>	<p>Topographic and geodetic works were carried out using modern, high-precision, satellite geodetic equipment — a single-frequency 12-channel GPS Sokia GRX1, represented by a base station and mobile receiver with a GPS antenna. The device at the measurement time has valid calibration certificates.</p> <p>For this report the holes were set out using the Sokia instrument and have been picked up by handheld GPS in the interim.</p> <p>The grid system used at the deposit is the WGS84 UTM Zone 43 coordinate system, Baltic elevation system.</p> <p>Downhole survey was carried out with a gyro instrument. Measurements of the angle and azimuth are carried out every 20 m.</p> <p>Control measurements have not revealed any inconsistencies and errors.</p> <p>The accuracy of the Sokia GRX1 results in deviations of no more than 10 cm.</p>
Data spacing and distribution	<p>Data spacing for reporting of Exploration Results.</p> <p>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</p> <p>Whether sample compositing has been applied.</p>	<p>The density of the drill holes within the estimated limits of the proposed open pit mining area is 40-100 m between the drill holes on each section. The distances between the sections is 250 m, and the depths of the drill holes varies between 60 and 300 m.</p> <p>The grid is sufficient to trace mineralisation zones.</p>
Orientation of data in relation to	<p>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is</p>	<p>The spatial position of the graphite zones is confined structurally to the western and southwestern limbs of the Shiyozek fold, complicated by the large</p>

For personal use only



Criteria	JORC Code explanation	Commentary
geological structure	<p>known, considering the deposit type.</p> <p><i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></p>	<p>curved Sarytoganbai syncline which trends in northeast and east directions.</p> <p>The North zone has a strike length of 2,300 m, a width of between 110 and 500 m, and a depth up to 190 m. The weighted average TGC for drill holes is 32.42% (for 20% cut-off). The average depth is 100 m.</p> <p>The Central zone has a strike length of 2,900 m, a width of between 86 and 114 m on the flanks up to 450 m in the centre, and a depth up to 80 m, with an average of 40 m. The weighted average graphite carbon content is 28.12% (for 20% cut-off).</p>
Sample security	<p>The measures taken to ensure sample security.</p>	<p>Control over the security of samples is carried out throughout the entire process. Each sample is assigned a unique number. The core samples selected after logging are transferred (with the corresponding orders and sample registers) to the sample preparation facilities, which is located in the Ekibastuz city. In the sample preparation laboratory, each sample underwent the entire processing cycle in compliance with all necessary requirements for the preservation of samples and the prevention of their contamination.</p>
Audits or reviews	<p>The results of any audits or reviews of sampling techniques and data.</p>	<p>A desktop review of the 2019 sampling techniques and data was carried out by CSA Global. The Competent Person from CSA Global also visited the site and sample preparation laboratory during August 2022. The results of this audit are pending and will be applied to the ongoing drilling and for the planned Mineral Resource upgrade.</p> <p>Visual validation of the drill hole and mineralised intersections was undertaken against hard copy drill</p>

For personal use only

Criteria	JORC Code explanation	Commentary
		sections and provided core photographs.

## Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<p><i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i></p> <p><i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i></p>	<p>The exploration licence 1139-R-TPI (1139-P-ТПИ) was issued to Ushtogan LLP on 14/08/2018 and confirmed by 5406-TPI (5406-ТПИ) contract on 26/10/2018. The contract was extended in June 2022 for a further 3 year to June 2025. The exploration concession covers 70 km<sup>2</sup>.</p> <p>There are no other mineral deposits and protected natural areas within the concession area.</p>
<i>Exploration done by other parties</i>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<p>In the period from 1985 to 1987, geological exploration was carried out by the Graphite party of the Karaganda State Regional geological expedition.</p> <p>Since 2019, exploration drilling is being carried out by Ushtogan LLP a 100% owned subsidiary of Sarytogan Graphite Limited.</p>
<i>Geology</i>	<i>Deposit type, geological setting and style of mineralisation.</i>	<p>Structurally, the Sarytogan site is confined to the western and southwestern wing of the Shiyozek fold, complicated by a large curved Sarytoganbai syncline which trends in northeast and east directions.</p> <p>In general, the Sarytogan site is a large, over-intrusive zone; the volcanic and sedimentary rocks developed here have undergone extensive contact metamorphism; volcanogenic and terrigenous rocks are transformed into quartz-biotite, quartz-sericite hornfels; carbonaceous rocks are either altered into hornfels, or underwent significant</p>

For personal use only

Criteria	JORC Code explanation	Commentary
		<p>graphitisation, and along contacts with intrusive granite domes, quartz-tourmaline and tourmaline hydrothermal rocks of the greisen type are developed.</p> <p>The deposit belongs to the black shale regional-metamorphic type and represents a carbon-bearing conglomerate sequence with a greisen zone with a thickness of more than 80 m in the over-intrusive zone of the granite massif that compose the Sarytoganbai syncline. Host rocks include graphite siltstone and graphite shale.</p>
Drill hole Information	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> <li>o easting and northing of the drill hole collar</li> <li>o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>o dip and azimuth of the hole</li> <li>o down hole length and interception depth</li> <li>o hole length.</li> </ul> <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	Refer to <b>Error! Reference source not found.</b> in the text.
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate</p>	<p>Intervals are reported at a 10% TGC cut-off with up to 2m internal dilution. Higher-grade 'inc' zones are reported at a 35% cutoff at a minimum thickness of 4m and with up to 6m internal dilution.</p>

For personal use only



Criteria	JORC Code explanation	Commentary
	<p>short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p> <p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</p>	<p>The deposit is hosted in folded meta-sediments that vary in dip angle. The relationship between the drillholes and the meta-sediment dip is shown in the cross sections. Vertical holes are considered appropriate to define the mineralisation envelope at this stage.</p>
Diagrams	<p>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	<p>Refer to diagrams in body of text.</p>
Balanced reporting	<p>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</p>	<p>All drillholes are reported.</p>
Other substantive exploration data	<p>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or</p>	<p>In 2019, drilling, analytical, metallurgical studies of small bulk samples and petrographic studies have been carried out at the deposit.</p> <p>The Prospectus dated 23 February 2022 available at <a href="http://asx.com.au">asx.com.au</a> also details historical metallurgical tests on the Sarytogan Graphite Deposit.</p>

For personal use only

Criteria	JORC Code explanation	Commentary
	contaminating substances.	Further metallurgical test work is underway and ongoing.
Further work	<p><i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></p> <p><i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></p>	Drilling is planned to upgrade the resources and check the extent of the mineralised zones.

For personal use only