

VISUAL SULPHIDES CONTINUE OVER SIGNIFICANT WIDTHS AS DRILLING NEARS COMPLETION

HIGHLIGHTS

- Mt Sholl maiden diamond drilling to be completed over following 2 days and ahead of schedule
- Further visual massive, semi-massive and disseminated nickel and copper bearing sulphide mineralisation¹ intersected over significant widths across the A1 & B1 deposits
- Pyrrhotite, chalcopyrite, and pentlandite are logged in the intersections¹
- Mineralisation correlates well to Company's modelling
- Preliminary results being interpreted and quality controlled. Initial assay results expected shortly and throughout November
- Summary of mineralised intervals¹
 - Hole 22A1DD001 – Pyrrhotite & Chalcopyrite mineralisation from 110.85 metres to 121.20 metres (10.38 meter interval)
 - Hole 22A1DD002 - Pyrrhotite & Chalcopyrite mineralisation from 127.9 metres to 143.8 metres (20.4 meter interval)
 - Hole 22B1DD003 – Pyrrhotite, Chalcopyrite & Pentlandite mineralisation from 85.5 metres to 107.7 metres (22.2 meter interval)
 - Hole 22B1DD004 - Pyrrhotite, Chalcopyrite & Pentlandite mineralisation from 92.2 metres to 125.0 metres (32.8 meter interval)

QUICK STATS

ASX Code: RDN

DAX Code: YM4

BOARD & MANAGEMENT

Non-Executive Chairman
Mr Michael Davy

Managing Director
Mr Dusko Ljubojevic

Non-Executive Director
Mr Martin Pawlitschek

Non-Executive Director
Mr Dale Ginn

Chief Operating Officer
Mr Warrick Clent

Company Secretary
Ms Kyla Garlic

ASSET PORTFOLIO

SERBIA

Cu, Co & Au (~269km²)

BULGARIA

Cu, Au & Ag (~409km²)

AUSTRALIA

Au, Cu, Ni & PGE (~840km²)

Raiden Resources Limited (ASX: RDN DAX: YM4) ("Raiden" or "the Company") is pleased to announce that it expects to conclude its maiden diamond drilling program at its flagship Ni-Cu-Co-PGE Mt Sholl Project over the weekend and reports further visual sulphide mineralisation over significant widths.

Mr Dusko Ljubojevic, Managing Director of Raiden commented: "We are highly encouraged by the continuous visual sulphide mineralisation intercepted to date over all three of the Mt Sholl deposits. These early visual results provide confidence in the historical drilling and we are hopeful

the laboratory results will confirm historical values. With the drilling program completed well ahead of the planned schedule, we anticipate this will also result in a saving from the budgeted amount, allowing us to deploy further funds towards planned metallurgical evaluations; further targeting on the project and JORC resource modelling. As soon as the initial laboratory results have been quality controlled and interpreted, we will be releasing them to the market."

To date, of the 38 completed drill holes, all holes have intersected visual¹ Nickel and Copper mineralisation and correlates well with initial modelling. This is a very encouraging outcome for the Company. With two final drill holes underway and planned for Saturday 22nd October completion, we are hopeful of a 100% success rate on the maiden program.

¹In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of sulphide and oxide material abundance should never be considered a proxy or substitute for laboratory analysis. Laboratory assay results are required to determine the widths and grade of the visible mineralisation reported in preliminary geological logging. The Company will update the market when laboratory analytical results become available.

Interpretation and quality control analysis is currently being conducted over initial batches from the program. As soon as this is completed, the Company will report the results to the market on an ongoing basis.

As previously reported, the maiden drilling program over Mt Sholl's three historical deposits, namely the A1, B1, and B2 deposits, aims to confirm selected historical results; confirm the Company's geological model of the deposit, as well as provide material for initial metallurgical testing.

Visual geological logging to date has confirmed significant Nickel and Copper sulphide mineralisation over significant widths and in line with the Company's Exploration target modelling. Management are hopeful that the laboratory results will confirm the resource model and allow the Company to progress towards defining a JORC compliant resource over the known historical deposits.

The program has generated a significant amount of material for metallurgical evaluations and testing, which will hopefully allow the Company to further optimise the work undertaken by previous explorers. The analysis will be undertaken over the following months.

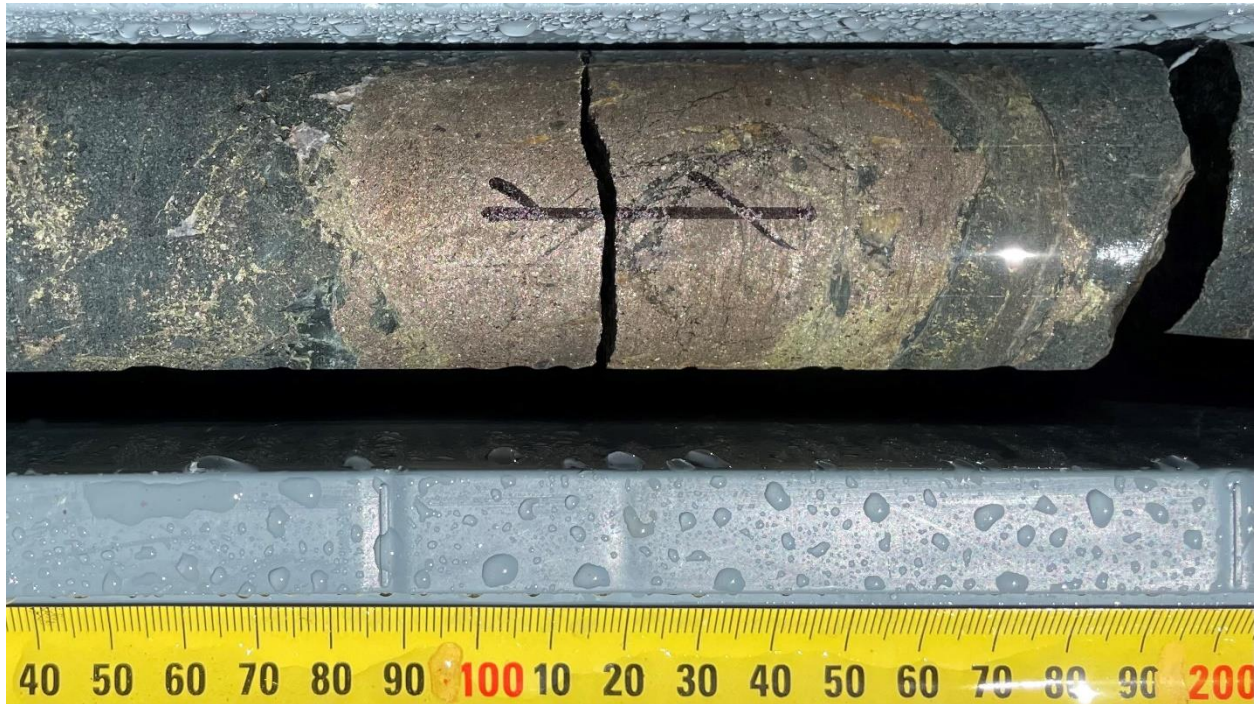


Figure 1: 22B1DD003 (101.3-101.4 metre interval – NQ core 47.6mm diameter). Mineralised dolerite with fine-grained massive pyrrhotite and chalcopyrite, with lesser pentlandite. Within a 22.2 metre zone of sulphide mineralisation.¹

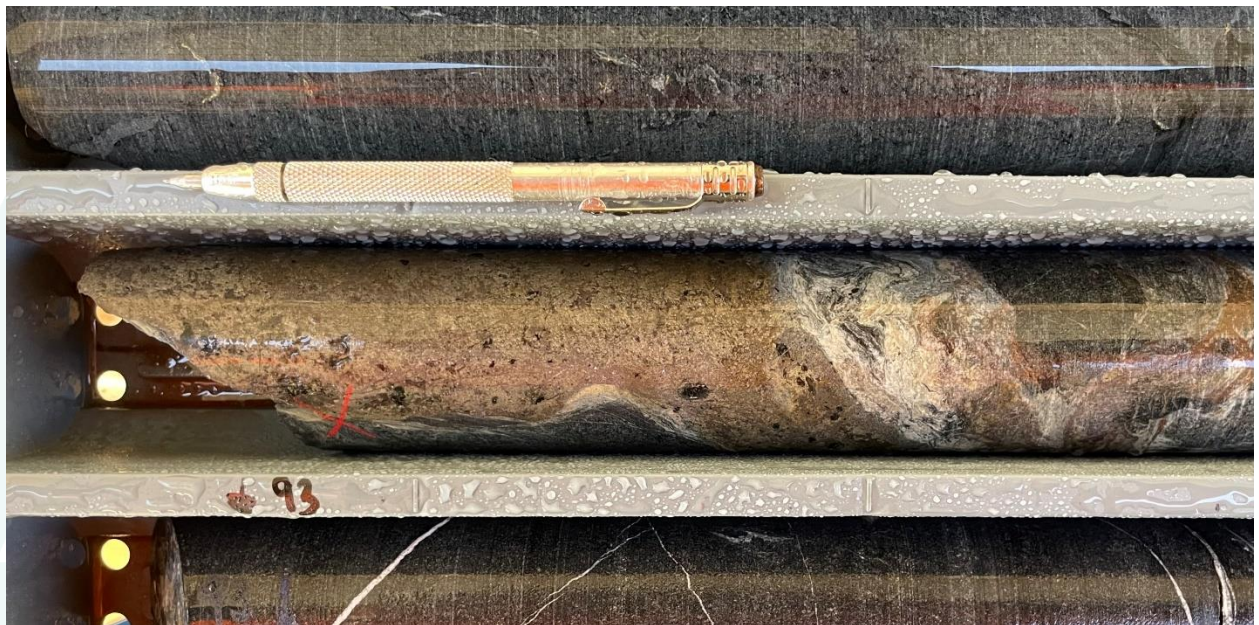


Figure 2: 22B1DD004 (92.2-92.4 metre interval – NQ core 47.6mm diameter). Strongly mineralised pyroxenite with fine-grained semi-massive pyrrhotite mineralisation, with lesser chalcopyrite and pentlandite, within a 32.8 metre zone of sulphide mineralisation.¹

For personal use only

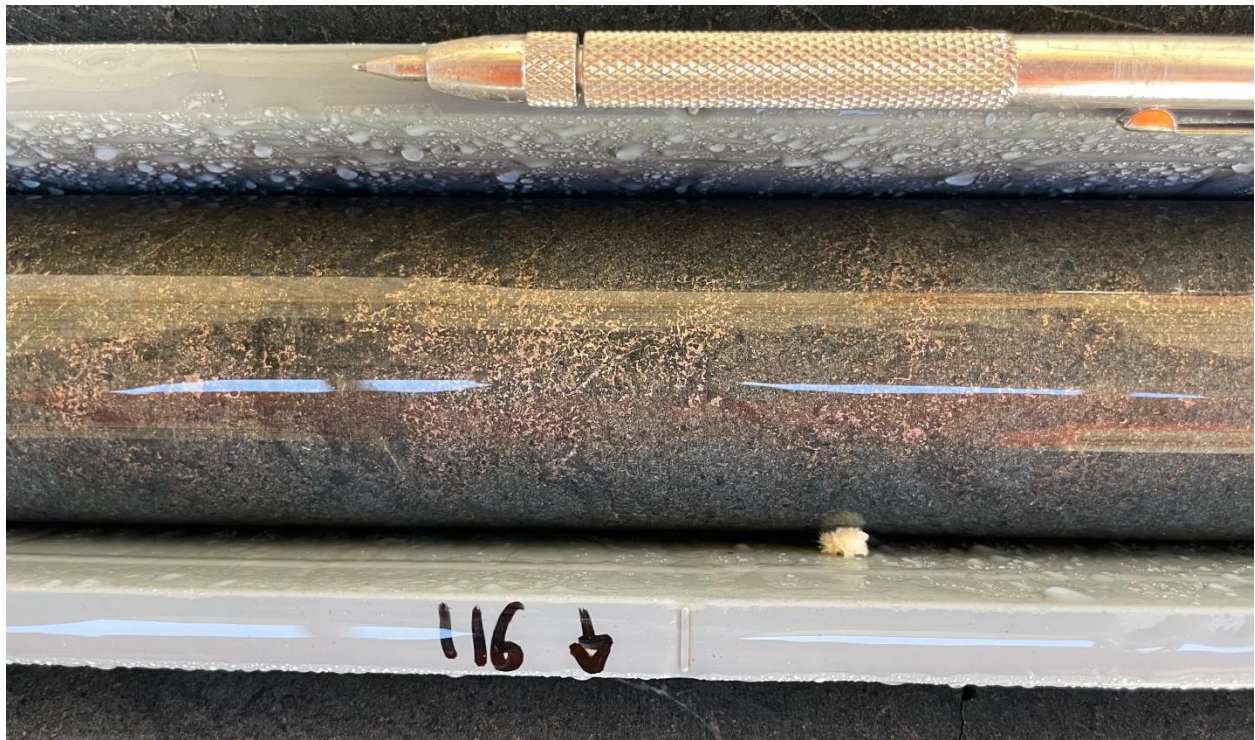


Figure 3: 22B1DD004 (approx. 115-116 metre interval – NQ core 47.6mm diameter). Strongly mineralised pyroxenite with fine-grained disseminated pyrrhotite mineralisation, with lesser chalcopyrite and pentlandite, within a 32.8 metre zone of sulphide mineralisation.¹

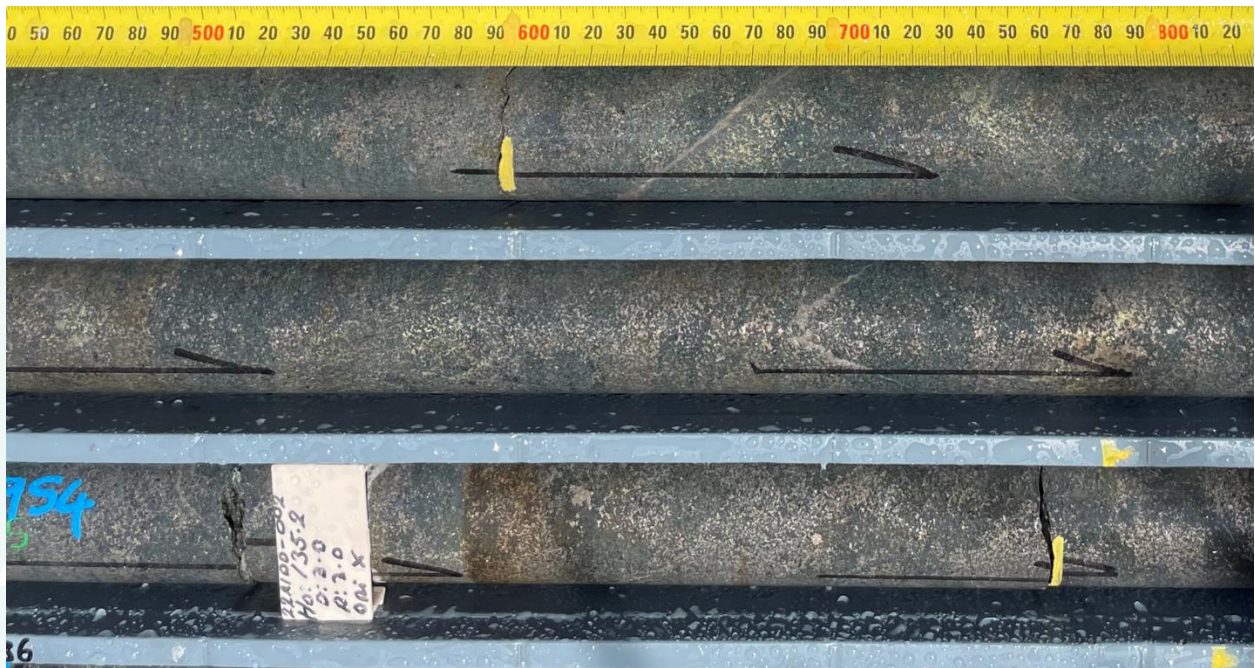


Figure 4: 22A1DD002 (133.5-135.5m interval – NQ core 47.6mm diameter). Mineralised pyroxenite with fine-to-coarse grained disseminated pyrrhotite and chalcopyrite. Within a 15.9 metre zone of sulphide mineralisation.¹

For personal use only

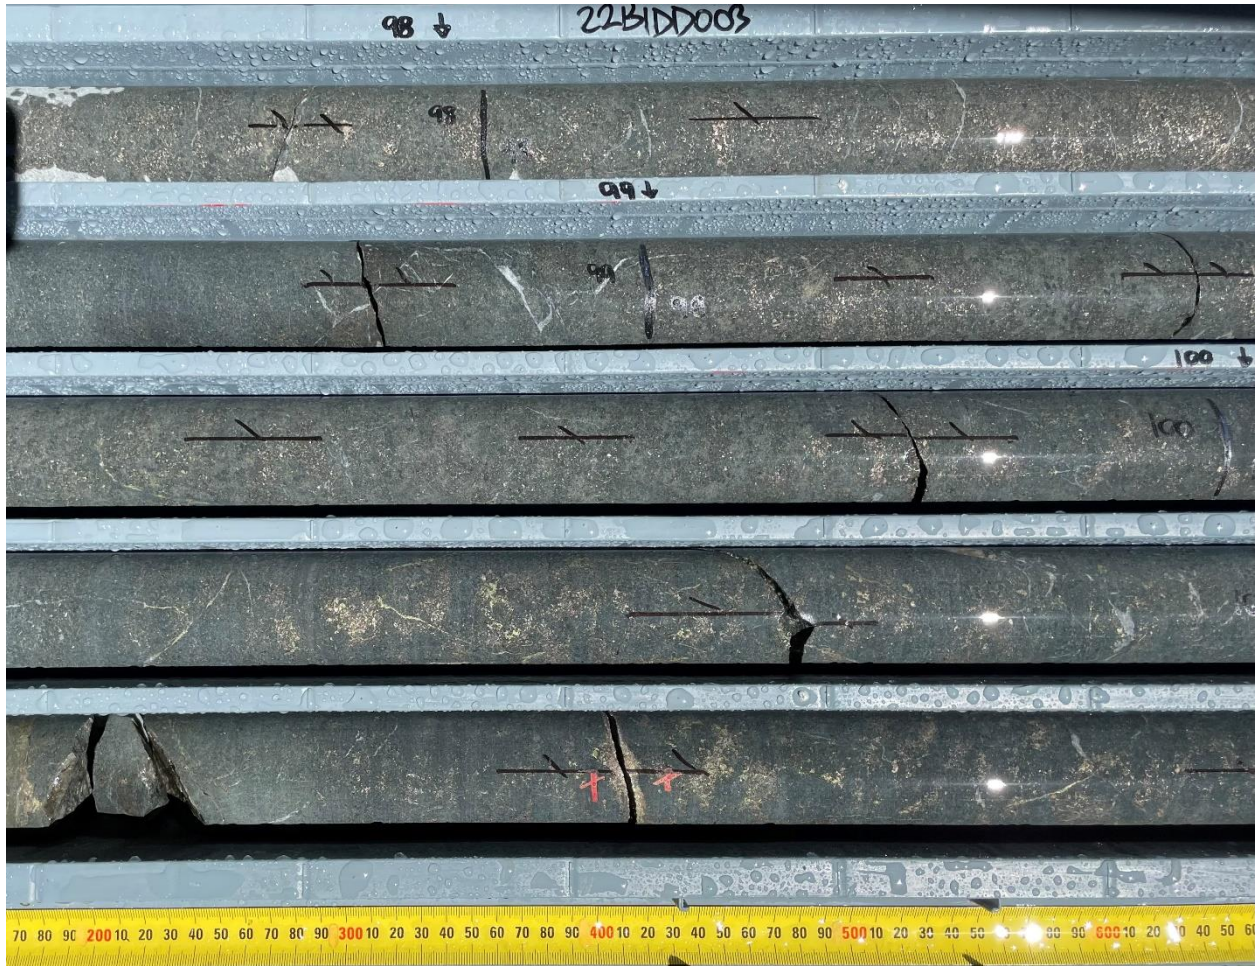


Figure 5: 22B1DD003 (included in the 85.5-107.7 metre interval – NQ core 47.6mm diameter). Mineralised dolerite with fine-grained disseminated pyrrhotite and chalcopyrite. Within a 22.2 metre zone of sulphide mineralisation.¹

¹In relation to the disclosure of visual mineralisation, the Company cautions that visual estimates of sulphide and oxide material abundance should never be considered a proxy or substitute for laboratory analysis. Laboratory assay results are required to determine the widths and grade of the visible mineralisation reported in preliminary geological logging. The Company will update the market when laboratory analytical results become available.

For personal use only

Table1: Summary of Sulphide Mineralisation Intersections²

Prospect	Hole ID	From	To	Interval	Sulphide % (Visual Estimate)	Host Lithology
A1	22A1DD001	110.85	121.2	10.35	Fine-grained disseminated Pyrrhotite and Chalcopyrite (approx. 2%)	Dolerite
A1	22A1DD002	127.9	143.8	15.9	High concentrations of fine-to-coarse grained Pyrrhotite-Chalcopyrite occurring as disseminated mineralisation, with zones of Pyrrhotite stringer and semi-massive sulphide mineralisation (approx. 10%)	Pyroxenite
B1	22B1DD003	85.5	107.7	22.2	Fine-grained Pyrrhotite-Chalcopyrite occurring as disseminated mineralisation, with zones of massive sulphide mineralisation as described below. (approx. 8%)	Dolerite
	including	101.3	101.4	0.1	Fine-grained massive pyrrhotite and chalcopyrite, with lesser pentlandite occurring as a band of massive sulphide (approx. 70%)	Dolerite
B1	22B1DD004	92.2	125.0	32.8	Fine-grained disseminated Pyrrhotite and Chalcopyrite with lesser Pentlandite, including a band of semi-massive Pyrrhotite, Chalcopyrite and lesser Pentlandite as described below (approx. 5%)	Pyroxenite
	Including	92.2	92.4	0.2	Band of semi-massive Pyrrhotite, Chalcopyrite and lesser Pentlandite between 92.2-92.4m as infill into a Quartz vein (approx. 45%)	Pyroxenite

²Note: Descriptions of the amounts of base metal sulphide seen and logged in the core of Holes 22B1DD003-004 & 22A1DD001-002 (above), are qualitative, visual estimates (they are listed in order of abundance of estimated combined percentages of pyrrhotite-nickel mineral, pentlandite-nickel mineral, chalcopyrite-copper mineral). True width not currently known. All lengths are down-hole lengths and not true width. Quantitative assays will be completed by an ALS laboratory in Perth.

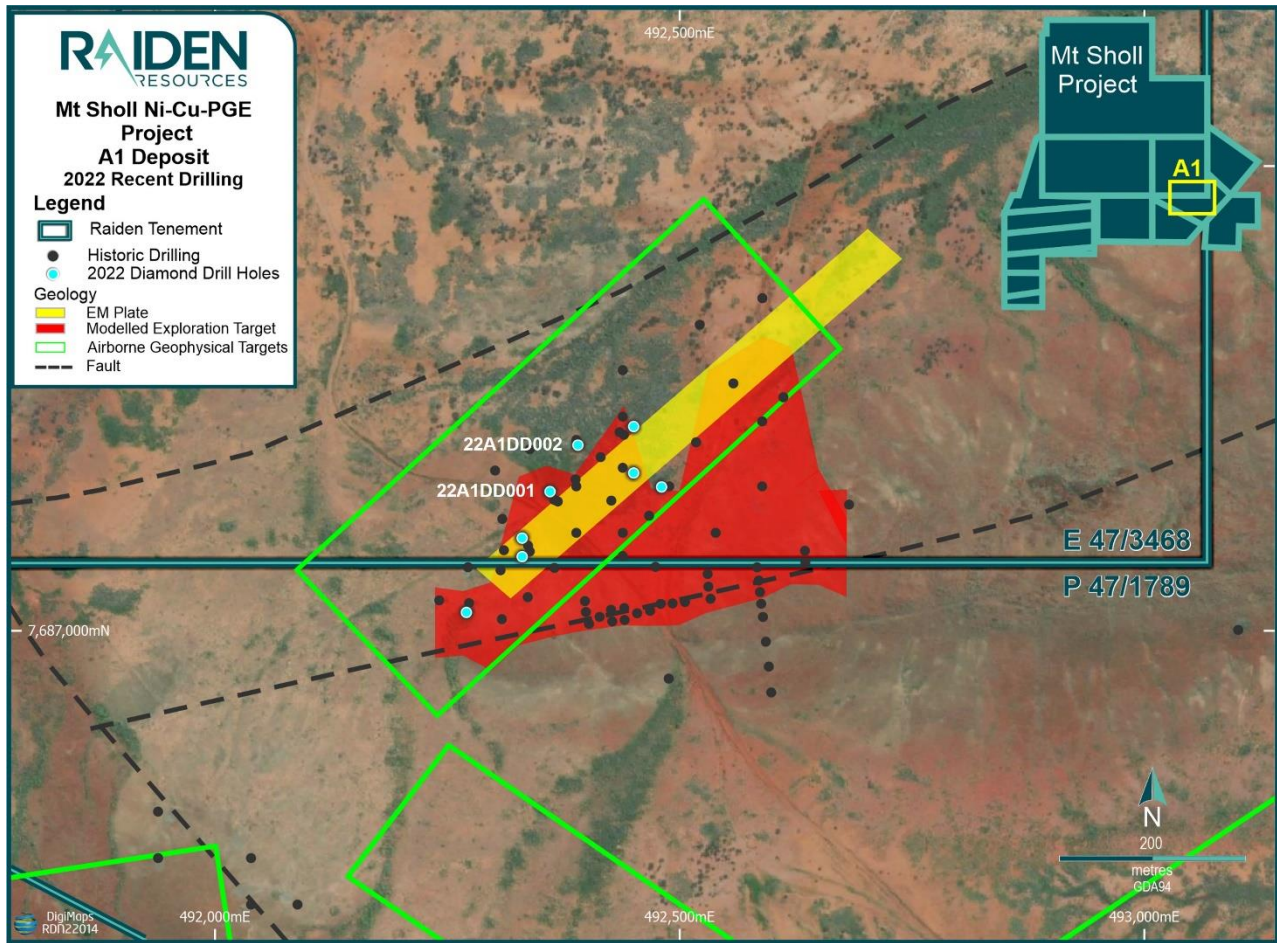


Figure 6: Mt Sholl A1 Deposit area with 2022 planned/drilled (blue dots) & historic hole locations over interpreted geology and JORC Exploration target³ (red)

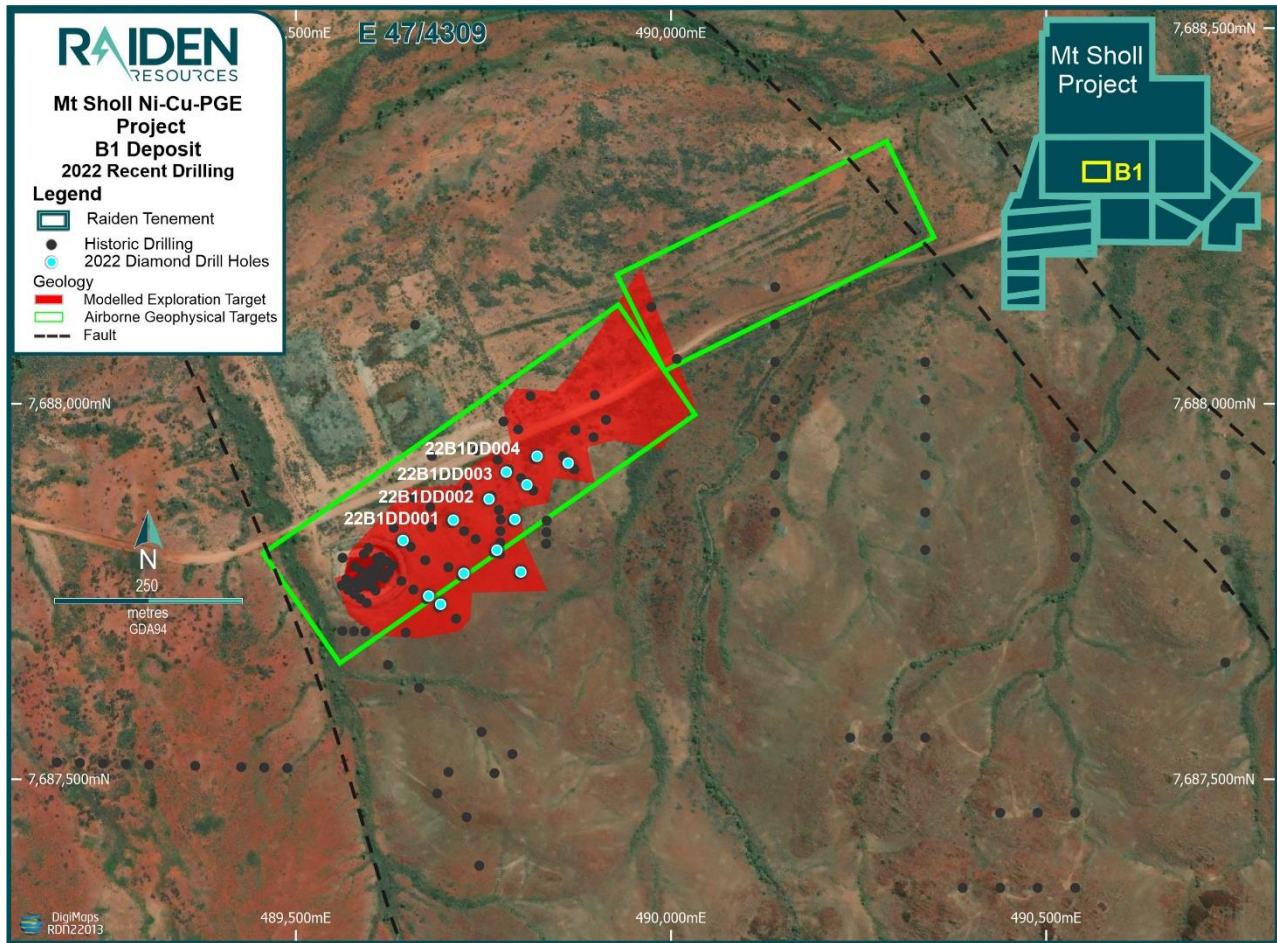


Figure 7: Mt Sholl B1 Deposit area with 2022 planned/drilled (blue dots) & historic hole locations over interpreted geology and JORC Exploration target³ (red)

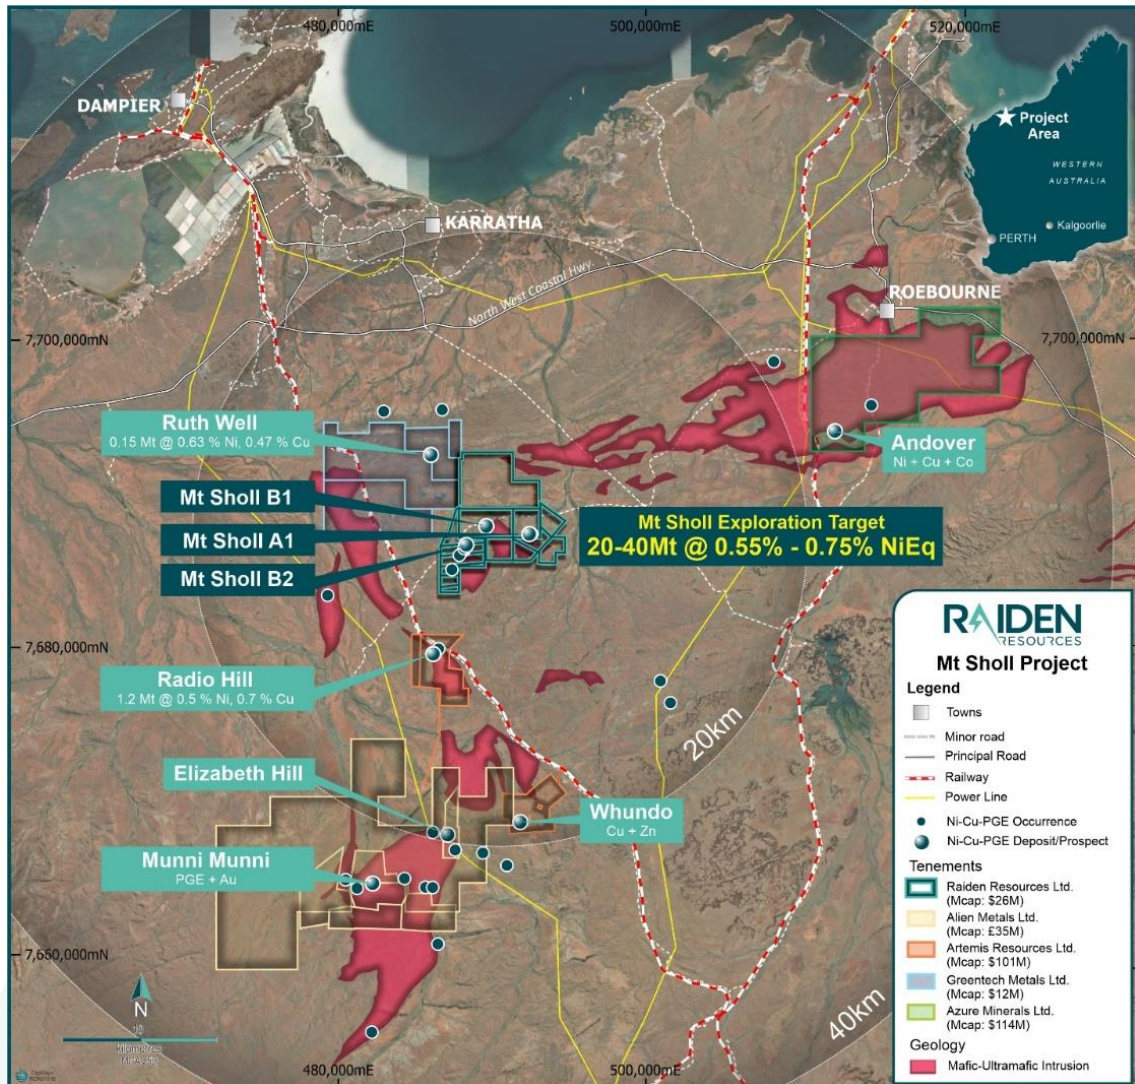


Figure 8: Mt Sholl Project in relation to key infrastructure and nearby JORC (2012) Resources^{3,4,5}

Table 2: List of drilled holes at the Mt Sholl Project referenced in this announcement

Prospect	Hole ID	GDA94_Z50 E	GDA94_Z50 N	RL	Dip	Azimuth	Total Depth (m)
A1	22A1DD001	492360	7687150	50	-75	180	135.11
A1	22A1DD002	492390	7687200	50	-60	180	170.3
B1	22B1DD003	489781	7687909	50	-90	0	122.27
B1	22B1DD004	489822	7687930	51	-90	0	130.03

Mt Sholl Ni-Cu-PGE Project Overview

The consolidated tenements are located 22 kilometres southeast of Karratha and 10 kilometres northeast of the mothballed Radio Hill mine in the Pilbara region of Western Australia, covering a total land area of 42km².

The tenements are underlain by Paleoproterozoic greenstone rocks, primarily basalt, and part of the Mesoproterozoic Mount Sholl layered mafic-ultramafic intrusive complex. The consolidated tenements host several Ni-Cu-Co-PGE deposits, with mineralisation occurring as disseminated, matrix, stringer and rare massive pyrrhotite-pentlandite-chalcocopyrite. High pyrrhotite content in ore means that Ni-Cu mineralisation in the intrusion across the consolidated tenements could be associated with discrete magnetic highs.

Extensive work on the properties targeting Ni-Cu-Co-PGE mineralisation was conducted by a number of companies from the early 1970's through to 2016. Exploration programs included the collection of surface samples (soil, auger and rock), airborne geophysics (magnetics, EM) and drilling (RAB, RC and diamond).

This ASX announcement has been authorised for release by the Board of Raiden Resources Limited.

FOR FURTHER INFORMATION PLEASE CONTACT

DUSKO LJUBOJEVIC

Managing Director

RAIDEN RESOURCES LIMITED

dusko@raidenresources.com.au

www.raidenresources.com.au

ASX Announcements referenced in this release

³ASX:RDN 17 November 2021 Large Ni-Cu-Co-PGE Sulphide 'Exploration Target' Defined at Mt Sholl

⁴ASX:ARV 7 May 2019 Nickel and Copper Resources at Ruth Well

⁵ASX:ARV 21 December 2018 Shallow Nickel-Copper Resource Defined at Radio Hill

The information in the referenced in announcement 3 footnoted above that relates to exploration results has previously been released on the ASX. The Company confirms that it is not aware of any information or data that materially affects the information included in the market announcements, and that all material assumptions and technical parameters continue to apply. The Company confirm that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Competent Person's Statement

The information in this announcement that relates to exploration results is based on and fairly represents information and supporting documentation, as previously announced by the Company, and has been reviewed and approved by Mr Warrick Clent, a competent person who is a member of the Australasian Institute of Mining and Metallurgy (AusIMM). Mr Warrick Clent is employed by Raiden Resources Limited. Mr Warrick Clent has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the JORC Code. Mr Warrick Clent has provided his prior written consent as to the form and context in which the exploration results and the supporting information are presented in this announcement.

The information in this announcement that relates to Exploration Targets is based on and fairly represents information and supporting documentation prepared by Mr Bruce H van Brunt, a Competent Person who is a Fellow of the Australasian Institute of Mining and Metallurgy (FAusIMM and a full-time employee of BvB Consulting. Mr Bruce H van Brunt has sufficient experience that is relevant to the style of mineralisation and type of deposits under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the JORC Code. Mr Bruce H van Brunt has provided his prior written consent as to the form and context in which the exploration results and the supporting information are presented in this announcement.

Disclaimer:

Forward-looking statements are statements that are not historical facts. Words such as "expect(s)", "feel(s)", "believe(s)", "will", "may", "anticipate(s)", "potential(s)" and similar expressions are intended to identify forward-looking statements. These statements include, but are not limited to statements regarding future production, resources or reserves and exploration results. All of such statements are subject to certain risks and uncertainties, many of which are difficult to predict and generally beyond the control of the Company, that could cause actual results to differ materially from those expressed in, or implied or projected by, the forward-looking information and statements. These risks and uncertainties include, but are not limited to: (i) those relating to the interpretation of drill results, the geology, grade and continuity of mineral deposits and conclusions of economic evaluations, (ii) risks relating to possible variations in reserves, grade, planned mining dilution and ore loss, or recovery rates and changes in project parameters as plans continue to be refined, (iii) the potential for delays in exploration or development activities or the completion of feasibility studies, (iv) risks related to commodity price and foreign exchange rate fluctuations, (v) risks related to failure to obtain adequate financing on a timely basis and on acceptable terms or delays in obtaining governmental approvals or in the completion of development or construction activities, and (vi) other risks and uncertainties related to the Company's prospects, properties and business strategy. Investors are cautioned not to place undue reliance on these forward-looking statements that speak only as of the date hereof, and the Company does not undertake any obligation to revise and disseminate forward-looking statements to reflect events or circumstances after the date hereof, or to reflect the occurrence of or non-occurrence of any events.

About Raiden Resources

Raiden Resources Limited (ASX:RDN / DAX:YM4) is a dual listed base metal—gold exploration Company focused on the emerging and prolific Western Tethyan metallogenic belt in Eastern Europe, where it has established a significant exploration footprint in Serbia and Bulgaria. In 2021 Raiden completed a transaction that resulted in the acquisition of highly prospective portfolio of gold, copper, nickel and PGE projects in the Pilbara region of Western Australia.

The Directors believe that the Company is well positioned to unlock value from this exploration portfolio and deliver a significant mineral discovery.

Appendix 1: Tenement Schedule

Tenement	Holder	Grant Date	Expiry	Area	RDN Equity %	Comment
E47/3468	Pilbara Gold Corporation Pty Ltd (Raiden Resources Ltd.'s 100% owned subsidiary)	12/09/2017	11/09/2022	1BI	100%	Covered by the NAC Heritage Agreement
E47/4309		24/07/2020	23/07/2025	2BI	100%	
E47/3339		14/09/2016	13/09/2026	1BI	80%	
E47/3181		13/08/2015	12/08/2025	5BI	80%	
P47/1762		01/09/2016	31/08/2024	139 Ha.	80%	
P47/1787		24/01/2017	23/01/2025	188 Ha.	80%	
P47/1788		24/01/2017	23/01/2025	200 Ha.	80%	
P47/1789		24/01/2017	23/01/2025	148 Ha.	80%	
P47/1790		30/11/2018	29/11/2022	197 Ha.	80%	
P47/1791		02/08/2018	01/08/2022	177 Ha.	80%	
P47/1792		02/08/2018	01/08/2022	193 Ha.	80%	
P47/1793		30/11/2018	29/11/2022	197 Ha.	80%	
P47/1794		30/11/2018	29/11/2022	157 Ha.	80%	
P47/1795		30/11/2018	29/11/2022	146 Ha.	80%	

Table 3: JORC Code, 2012 Edition. Section 1.

Criteria	JORC Code explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> • <i>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</i> • <i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i> • <i>Aspects of the determination of mineralisation that are Material to the Public Report.</i> • <i>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</i> 	<ul style="list-style-type: none"> • The deposits and prospects have been drilled using Rotary Air Blast (RAB), Air Core (AC), Reverse Circulation (RC) and Diamond drilling over numerous campaigns by several companies and currently by Raiden Resources Ltd. Hole spacing from previous drilling has varied according to company and purpose of drilling. Likewise, the dip and azimuth has varied. For this announcement the drill type was diamond drilling, however in relation to this announcement no sampling has been conducted as yet and no assays are being reported • Sample procedures followed by historic operators are assumed to be in line with industry standards at the time. Current QAQC protocols include the analysis of field duplicates and the insertion of appropriate commercial standards and blank samples. Based on statistical analysis of these results, there is no evidence to suggest the samples are not representative. In relation to this announcement no sampling has been conducted as yet and no assays are being reported • Where diamond drilling was undertaken ½ HQ3 or NQ2 core was sampled, while for duplicate samples ¼ core was sampled, and samples analysed at ALS Geochemical laboratory in Perth. In relation to this announcement no sampling has been conducted as yet and no assays are being reported
Drilling techniques	<ul style="list-style-type: none"> • <i>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</i> 	<ul style="list-style-type: none"> • Reverse circulation, open-hole percussion and diamond - both HQ and NQ sized core. • It is not known if a face sampling hammer was used by previous companies. • For this announcement it was diamond drilling using core sizes of HQ3 and NQ2

Criteria	JORC Code explanation	Commentary
Drill sample recovery	<ul style="list-style-type: none"> • Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> • It is not known how or whether sample recovery was monitored by previous companies. • Diamond drilling was undertaken by Raiden Resources Ltd and the core measured and orientated where appropriate to determine recovery. The diamond drilling recovery has been excellent with very little to no core loss identified. There was no sample loss related to the drilling in this announcement • In relation to this announcement no sampling has been conducted as yet and no assays are being reported
Logging	<ul style="list-style-type: none"> • Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> • Core and chip samples were geologically logged by previous companies. But it is not known if core was geotechnically logged. • The historical data has been used for Mineral Resource estimation of the Mt Sholl B2 JORC (2004) Mineral Resource estimate completed by RSG Global Consulting Pty Ltd (“RSG”) in 2007, and the Mt Sholl A1 & B1 JORC (2004) Mineral Resource estimates completed by Snowden Mining Industry Consultants Pty Ltd (“Snowden”) in 2010. • Snowden considered the geological logging as unreliable and geological contacts were often interpreted from assay values. • RSG relied on a Fox Resources Ltd supplied interpretation which was reviewed and modified as required. • All current diamond drill holes have been logged in full, and the diamond core photographed tray by tray wet and dry
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. 	<ul style="list-style-type: none"> • For previous companies the methods for splitting the drill samples and relevant quality control procedures are unknown. It is not known if duplicate splits were collected or analysed. Commercial laboratories followed standard procedures for sample preparation to produce sub-samples for analysis. • Diamond drilling completed by Raiden Resources on the Mt Sholl tenements has been ½ or ¼ core (for NQ) or ½ or ¼ core (for HQ) sampled.

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> • <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i> • <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i> • <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i> 	<ul style="list-style-type: none"> • Field QAQC procedures included the insertion of 2% certified reference ‘standards’ and 2% field duplicates and 2% ‘blanks’ for diamond drilling • The diamond core has been consistently sampled with the left-hand side of the HQ and NQ holes sampled, while for duplicate core samples the left hand side of the left-hand half was sampled • A sample size of between 3 and 5 kg was collected. This size is considered appropriate, and representative of the material being sampled given the width and continuity of the intersections.
<p>Quality of assay data and laboratory tests</p>	<ul style="list-style-type: none"> • <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i> • <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i> • <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i> 	<ul style="list-style-type: none"> • Laboratory procedures and assaying by previous companies are considered appropriate for the type of sample, but laboratory quality control procedures are not available for the samples. • Raiden’s diamond drilling samples are submitted to ALS Geochemistry laboratory in Perth for Four Acid Multi-Element Analysis ICP-AES (ME-ICP61). The Pt, Pd, Au analysis was carried out via lead fire assay with AES technique with 50g lead collection fire assay in new pots, analysed by Atomic Emission Spectrometry. • Fire Assay is an industry-standard for Pt, Pd, Au and it is considered appropriate as a first-pass analysis. For finer analysis on the Platinum Group Metals Raiden will undertake selective analysis using the Nickel Sulphide Fire Assay procedure where after dissolution of the pulp with aqua regia, PGM’s are determined by ICP-MS. • Certified Reference Materials (CRM or standards) and blanks are inserted at the rates 1:25 sample to assess the assaying accuracy of the external laboratories. • Standards, blanks, and duplicates have been used by the laboratory for QAQC. • No laboratory audits were undertaken.

personal use only

Criteria	JORC Code explanation	Commentary
<p>Verification of sampling and assaying</p>	<ul style="list-style-type: none"> • <i>The verification of significant intersections by either independent or alternative company personnel.</i> • <i>The use of twinned holes.</i> • <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i> • <i>Discuss any adjustment to assay data.</i> 	<ul style="list-style-type: none"> • Significant intercepts have not been verified by Raiden or independent personnel, as the core is not available. • Because the data are historical, the methods of data documentation, verification and storage are not known. • As far as the CP is aware, no adjustments have been made to assay data. • The current drill program by Raiden is purposely twinning historic holes, generally drilling at approximately 5m distance from those holes, to verify the accuracy of the historic drill hole data. • Primary data (geological) was collected using previously defined standard codes and the information uploaded in Excel files on laptop computers by Senior Supervising Geologists. • All data is received and stored securely in digital format in the Company's database. • Final data is rigorously interpreted by Raiden's geoscientific personnel. • All diamond drill holes were surveyed down-hole with north-seeking gyroscopic survey instruments by the supervising/senior driller.
<p>Location of data points</p>	<ul style="list-style-type: none"> • <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i> • <i>Specification of the grid system used.</i> • <i>Quality and adequacy of topographic control.</i> 	<ul style="list-style-type: none"> • The accuracy of the drillhole locations was questioned by Fox Resources Ltd as stated by Snowden in their resource report for the Mt Sholl A1 & B2 Mineral Resource. • No field verification of previous drill collars has been conducted to date. • Downhole surveys were not recorded for RC holes and generally not recorded for vertical diamond drillholes. • Snowden during their resource modelling for Fox Resources Ltd regarded the absence of downhole survey information not critical in the overall classification of the deposit because a small shift in the position of the ore intersects as a result of proper downhole survey information will not alter the global resource materially • Co-ordinates are provided in the Geocentric Datum of Australia (GDA94) Zone 50.

personal use only

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> • Raiden’s collars surveyed by handheld GPS with an accuracy of +/- 5m, and a registered surveyor will be contracted to accurately survey all drill collars at completed of drill program. • Topographic control is based on the 30m spaced SRTM (Shuttle Radar Topography Mission). Other topographical models from airborne geophysical surveys are available but have been assessed to not be as accurate as the SRTM data. Raiden intends to conduct a LiDAR survey of the area to establish appropriate topographical controls in the near future.
<p>Data spacing and distribution</p>	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • Drillhole spacing is variable, near surface drill holes generally spaced 30 m to 40 m along strike and down dip, deeper holes spaced approximately 100 m from one another • Drill samples were collected at a range of intervals up to 4m. • Current reporting is for progressive exploration results, and also for JORC (2004) Mineral Resource estimation as specified in the body of the announcement. • Sample compositing of drillhole results specified has not been applied for reporting exploration results. • Sample compositing over widths of 1 metre, which represents the majority of sample widths, occurred for the purpose of the Snowden Mt Sholl A1 & B2 JORC (2004) Mineral Resource estimates. • For the RSG Mt Sholl B2 JORC (2004) Mineral Resource estimate 2 metre composite samples were extracted from the mineralisation model provided by Fox Resources Ltd to RSG. • No sample compositing has been applied on the current diamond drill program. In relation to this announcement, samples have been collected and analysed with a maximum interval of 1m, and a minimum interval of 0.3m, with the majority of samples collected at 1m intervals.
<p>Orientation of data in</p>	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the</i> 	<ul style="list-style-type: none"> • Drillholes were oriented to result in approximately perpendicular penetration of the projected lodes.

personal use only

Criteria	JORC Code explanation	Commentary
relation to geological structure	<p><i>extent to which this is known, considering the deposit type.</i></p> <ul style="list-style-type: none"> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<ul style="list-style-type: none"> No known sampling bias was introduced because of the drill orientation.
Sample security	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> Sample security measures by previous companies are not known. For the current drilling the sample chain of custody is managed by Raiden. All samples were collected in the field at the project site in number-coded calico bags/secure labelled polyweave sacks by Raiden’s geological and field personnel. All samples were delivered directly to the associated carrier, RGR Road Haulage, by Raiden personnel before being transported to the ALS laboratory in Perth WA for final analysis.
Audits or reviews	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> No reviews or audits have been undertaken.

Table 4: JORC Code, 2012 Edition. Section 2. (Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> Raiden Resources Ltd tenements are located in the City of Karratha, within the Pilbara region of Western Australia. The tenements are held by either by Raiden Resources Ltd 100%, or Raiden Resources Ltd 80%/Welcome Exploration Pty Ltd 20%. (see Appendix 1: Tenement Schedule for further detail). Tenements are located on the Mt Welcome pastoral lease. Raiden is not aware of any existing impediments nor of any potential impediments which may impact ongoing exploration and development

personal use only

Criteria	JORC Code explanation	Commentary
		activities at the project site.
Exploration done by other parties	<ul style="list-style-type: none"> <i>Acknowledgment and appraisal of exploration by other parties.</i> 	<ul style="list-style-type: none"> A full search and compilation of historic exploration has been completed. Work included stream sediment, soil and rock sampling, geological mapping, geophysical surveys, drilling, resource estimation and mining studies.
Geology	<ul style="list-style-type: none"> <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> Magmatic Ni-Cu-PGE and orogenic gold mineralisation. Paleoarchean greenstone rocks intruded by Mesoarchean mafic-ultramafic intrusive complex associated with widespread disseminated to matrix and stringer pyrrhotite-pentlandite-chalcopyrite mineralisation. Mesoarchean mylonite in the Sholl Shear Zone north of the property, with lode gold mineralisation in related subsidiary structures.
Drill hole Information	<ul style="list-style-type: none"> <i>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</i> <ul style="list-style-type: none"> <i>easting and northing of the drill hole collar</i> <i>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</i> <i>dip and azimuth of the hole</i> <i>down hole length and interception depth</i> <i>hole length.</i> <i>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i> 	<ul style="list-style-type: none"> Drillhole data are tabulated in the body of the announcement. RL is not provided as it is not considered material.

Criteria	JORC Code explanation	Commentary
<p>Data aggregation methods</p>	<ul style="list-style-type: none"> • <i>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</i> • <i>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</i> • <i>The assumptions used for any reporting of metal equivalent values should be clearly stated.</i> 	<ul style="list-style-type: none"> • High grades have not been cut. • Cut off grades and treatment of internal waste for drill intercepts are listed in the body of the report. • Metal equivalent values are not reported
<p>Relationship between mineralisation widths and intercept lengths</p>	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg ‘down hole length, true width not known’).</i> 	<ul style="list-style-type: none"> • Intercept is quoted as downhole lengths; holes were oriented roughly perpendicular to mineralisation but the true width is not known.
<p>Diagrams</p>	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • Maps are included in the body of the announcement.

personal use only

Criteria	JORC Code explanation	Commentary
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> All historic results are reported as they have been released to the ASX by the previous companies. In relation to this announcement no sampling has been conducted as yet and no assays are being reported
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> All relevant data are reported in this release.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Raiden are currently conducting a comprehensive drill program to further assess the Mt Sholl A1, B1, and B2 JORC (2004) Mineral Resources.

personal use only