

ASX RELEASE | 14 February 2023

New assay results confirm strong lithium mineralisation at Adina

HIGHLIGHTS

- Assays from Adina continue to show impressive lithium mineralisation:
 - 1.28% Li₂O over 93.5m from 3.0m (AD-22-001)
 - 1.52% Li₂O over 23.9m from 4.6m (AD-22-005A)
 - 1.56% Li₂O over 17.0m from 88.6m, and
 - 1.04% Li₂O over 54.2m from 232.8m (AD-22-007)
- Intersections include exceptionally high grade zones such as:
 - 2.16% Li₂O over 16.0m from 23.0m,
 - 2.37% Li₂O over 5.7m from 60.4m, and
 - 4.19% Li₂O over 4.1m from 73.1m (AD-22-001)
 - 2.04% Li₂O over 13.9m from 4.6m (AD-22-005A)
 - 2.72% Li₂O over 7.0m from 98.6m, and
 - 2.14% Li₂O over 6.0m from 232.8m (AD-22-007)
- Assays have now been received from 6 drillholes of 32 holes completed to date.
- Results are in addition to the recent identification of a potential extension to the strike length of the Adina pegmatite body to 1,600m.
- Assays being received in a more consistent timeframe meaning further results will be able to be reported at regular intervals during the remainder of the programme.
- Expanded drilling program at Adina continues to progress rapidly and now well-funded after recent capital raising.

Winsome Resources (ASX:WR1; “Winsome” or “the Company”) is pleased to announce further assay results from drilling at its 100 per cent-owned Adina project in Quebec, Canada.

Assays reported here are from drillholes AD-22-001, AD-22-002, AD-22-005A, AD-22-007 and AD-22-008 within the Adina Main Zone with results including:

- 1.28% Li₂O over 93.5m from 3.0m to 96.5m, including:
 - 1.61% Li₂O over 8.0m from 3.0m to 11.0m
 - 2.16% Li₂O over 16.0m from 23.0m to 39.0m
 - 2.37% Li₂O over 5.7m from 60.4m to 66.1m
 - 1.89% Li₂O over 12.7m from 73.1m to 85.8m
further including 4.19% Li₂O over 4.1m from 73.1m to 77.2m
(AD-22-001)
- 1.52% Li₂O over 23.9m from 4.6m to 28.5m, including:
 - 2.04% Li₂O over 13.9m from 4.6m to 18.5m
(AD-22-005A)
- 1.56% Li₂O over 17.0m from 88.6m to 105.6m, including:
 - 2.72% Li₂O over 7.0m from 98.6m to 105.6m
and
- 1.04% Li₂O over 54.2m from 232.8m to 287.0m, including:
 - 2.14% Li₂O over 6.0m from 232.8m to 238.8
 - 1.14% Li₂O over 11.0m from 249.0m to 260.0m
 - 1.77% Li₂O over 11.7m from 275.3m to 287.0m
and
- 0.88% Li₂O over 19.0m from 324.6m to 343.6m, including:
 - 2.01% Li₂O over 4.6m from 324.6m to 329.6m
(AD-22-007)
- 0.88% Li₂O over 23.8m from 41.9m to 65.7m, including:
 - 1.31% Li₂O over 7.0m from 41.9m to 48.9m
 - 1.34% Li₂O over 3.0 m from 51.9m to 54.9m
 - 1.89% Li₂O over 3.0 m from 60.5m to 63.5m
(AD-22-008)

Intercepts are calculated using a 0.3 % Li₂O cut-off grade, a minimum thickness of 5m and including up to 7m of internal dilution. A full list of intersections can be found in Appendix 1 below.

WINSOME RESOURCES MANAGING DIRECTOR CHRIS EVANS SAID:

“These results are just as impressive as our initial assays from drill hole AD-22-005 and confirm the high-grade nature of the lithium mineralisation at the Adina Main Zone. They also give us encouragement for the numerous other intersections which are currently being logged, sampled, assayed and interpreted. The progress since we made the Jamar Discovery in September is remarkable and we continue to rapidly progress an intensive drill programme at Adina with the recent backing of the capital markets. We look forward to further results delineating the high grade zones of lithium mineralisation at Adina as well as building up the geological interpretation with the aim of starting resource estimation work later in the year.”

Adina Main Zone results commentary

Over 6,400 metres have been drilled in 32 holes at the Adina Main Zone (Appendix 2), defining a substantial continuous pegmatite body over a strike length of over 600m and to depths 200 metres from surface¹.

A further potential strike extension of the pegmatite body to a total of 1,600m has been interpreted based on recent drilling results and geophysical surveys, with drilling scheduled to verify this interpretation in coming months¹.

The assay results presented in this release are from 6 drillholes at the western margin of the Adina Main Zone (which covers the Jamar discovery, Figure 1). These holes were drilled in October-November 2022, at the commencement of the drilling programme.

Mineralisation remains open to the west and down dip from these results. Assays are awaited from some 26 drillholes along strike to the east, many of which have intersected thick zones of spodumene-bearing pegmatites¹ (Appendix 3). Mineralisation intersected in AD-22-008 indicates the potential for “fingering” of the dykes near surface.

The new assay results highlight the zonation of high-grade mineralisation within the pegmatite body with highest grades of lithium mineralisation seeming to occur at the top and base of the body, closest to the contact with the regional amphibolites. Detailed litho-geochemical data will be used to try and “map” different zones to aid interpretation and targeting of high grade zones in future drilling.


As detailed in ASX Announcements of 6 January 2023 and 25 January 2023 the helicopter supported drilling program at Adina has been extended significantly to more than 20,000m. Two drilling rigs are currently implementing the expanded drilling and resource definition program.

A drilling update was recently provided in the ASX Announcement of 25 January 2023. Further drilling updates, including summaries of visual observations of core recovered from drilling, will be provided on an on-going basis to the market.



*Photograph 1: Core recovery AD-22-007 – 94.7m to 107.1m
 Assays: 2.72% Li₂O over 7.0m from 98.6m to 105.6m*

¹ “Pegmatite at Adina extended to 1,600m of potential strike” ASX Announcement 25 January 2023

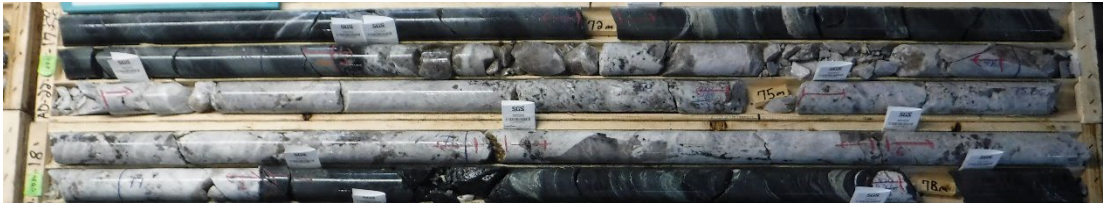

*Photograph 2: Core recovery AD-22-001 – 71.1m to 78.1m
Assays: 4.19% Li₂O over 4.1m from 73.1m to 77.2m*

Winsome carries out logging of all drill samples at its nearby exploration project base. Visual estimates of the pegmatite mineralogy - as a percentage range of spodumene content, textures, mineralogy and omnipresent structures - are recorded by project geologists and supervisors prior to sending samples to the laboratory. Strict handling procedures and QAQC protocols are followed.

The program's full results to date are set out in the appendices below.

Core samples from all mineralised intervals continue to be dispatched to SGS in neighbouring Ontario for analysis. Results will be reported when they become available.

The Company also expects to provide an update on its Cancet drilling campaign, which is running concurrently with the Adina campaign, in the near term.

The Company reminds investors that the presence of spodumene crystals within pegmatite does not necessarily equate to lithium mineralisation or indicate the percentage of lithium mineralisation, which can only be accurately confirmed by chemical assays. When such laboratory results become available, they will be reported in full in a future report.

For further information please contact

INVESTORS

Chris Evans - Managing Director
Winsome Resources
E. administration@winsomerresources.com.au

MEDIA

Simon Shepherdson - Media Manager
Spoke Corporate
E. simon@spokecorporate.com
P. +61 413 809 404

This announcement has been approved for release by the Board of Directors.

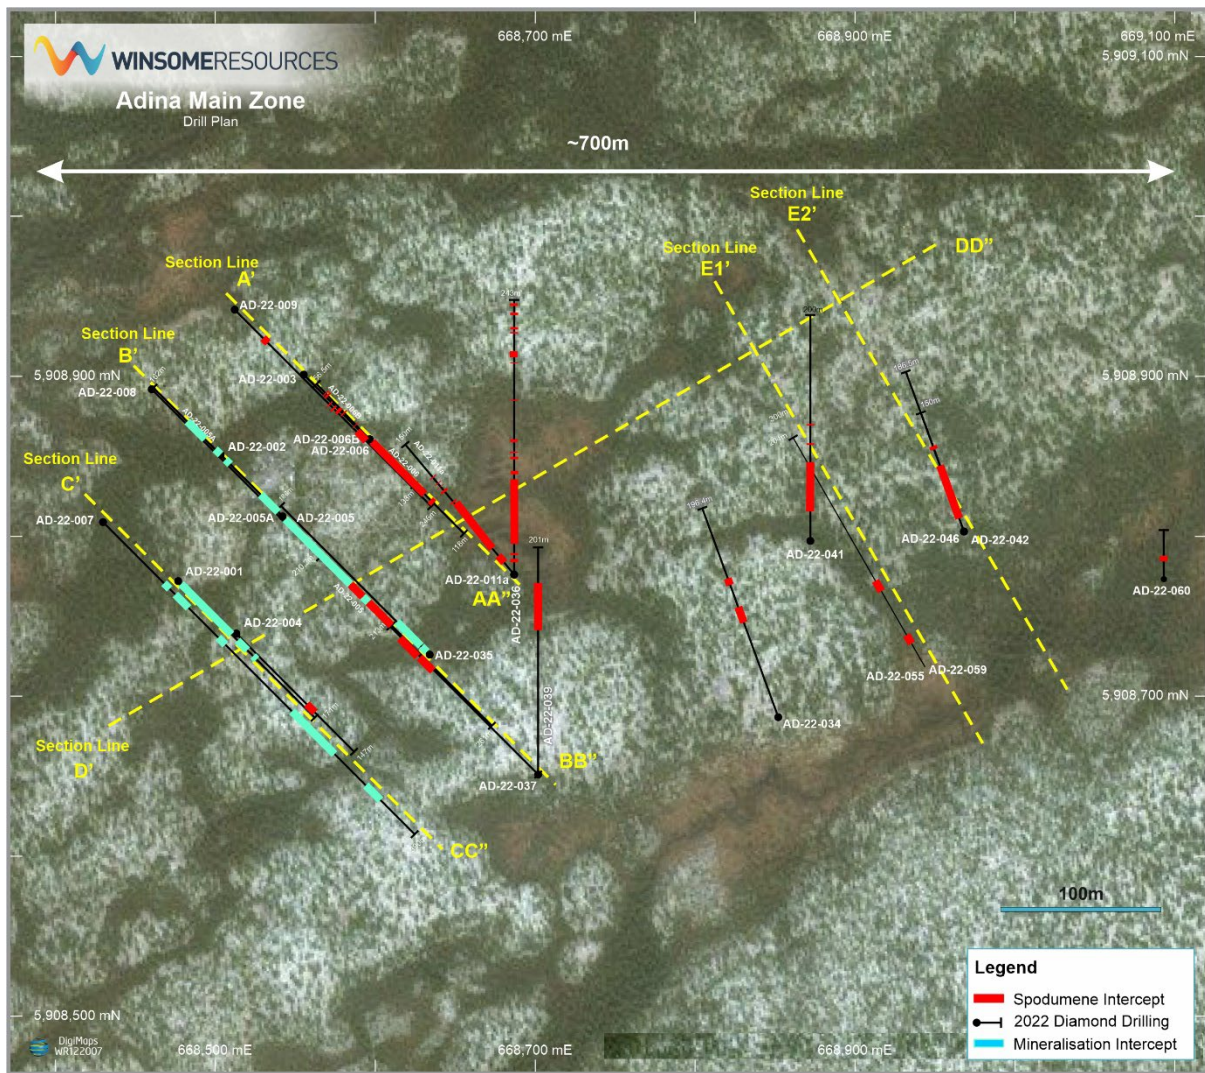


Figure 1: Plan view Adina Main Zone drilling
Sections A, E1 and E2 are awaiting assays and are not included in this announcement²

² Refer “Pegmatite at Adina extended to 1,600m of potential strike” ASX Announcement 25 January 2023 and “Strong lithium mineralisation recorded from first Adina drill hole assays” ASX Announcement 6 January 2023 for these sectional views.

For personal use only

For personal use only

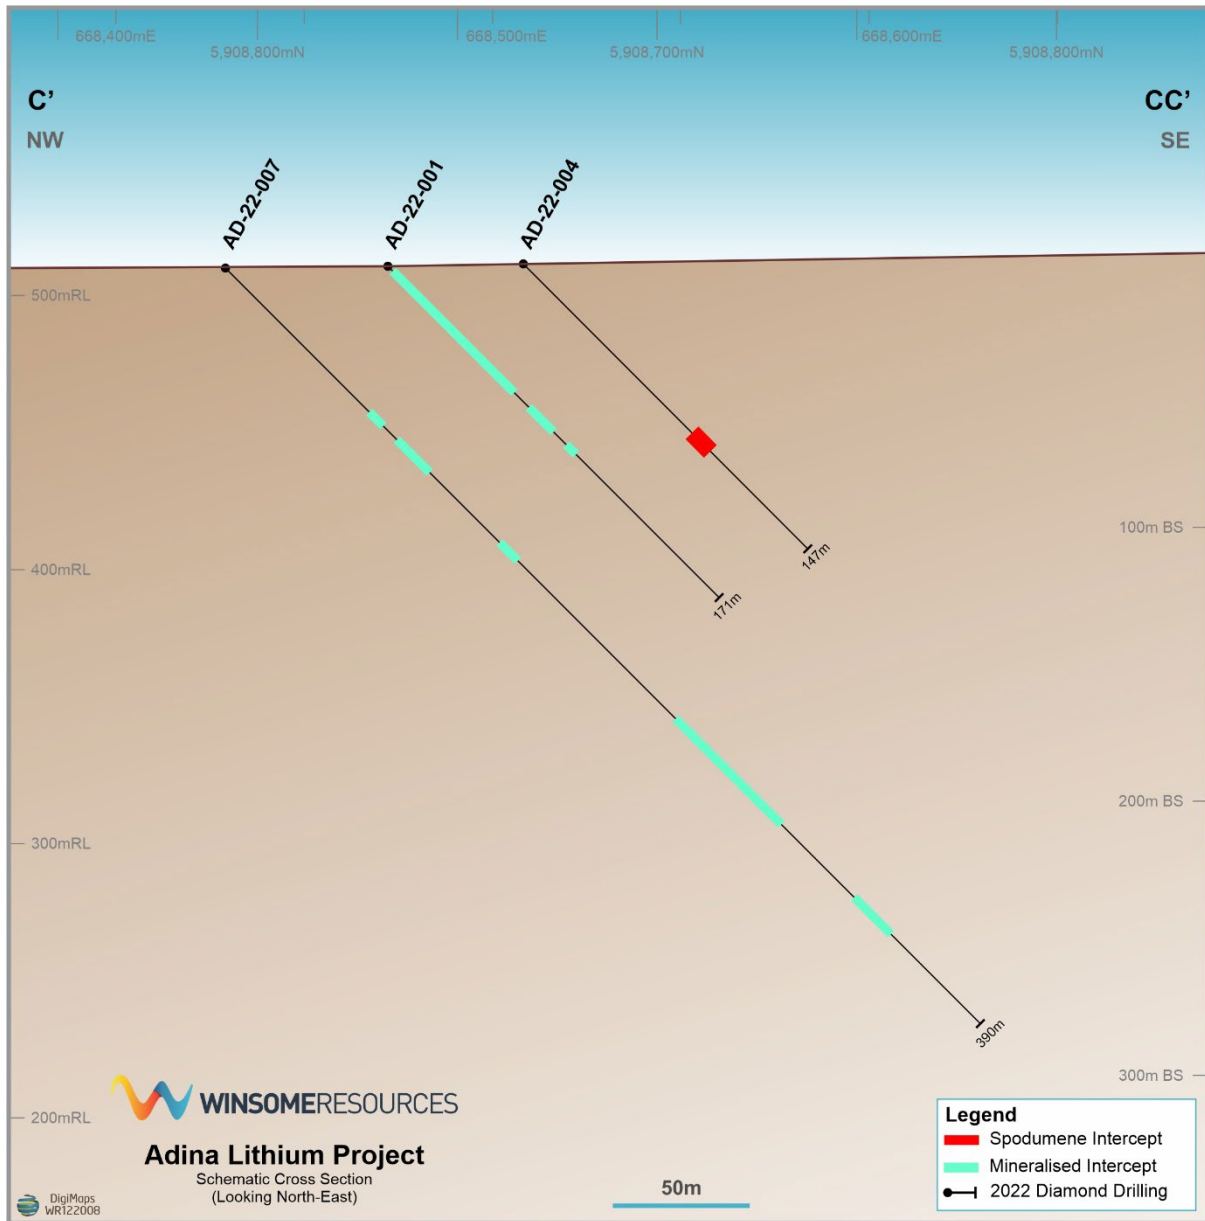


Figure 2: Section view looking North-East – Line C' – CC''

For personal use only

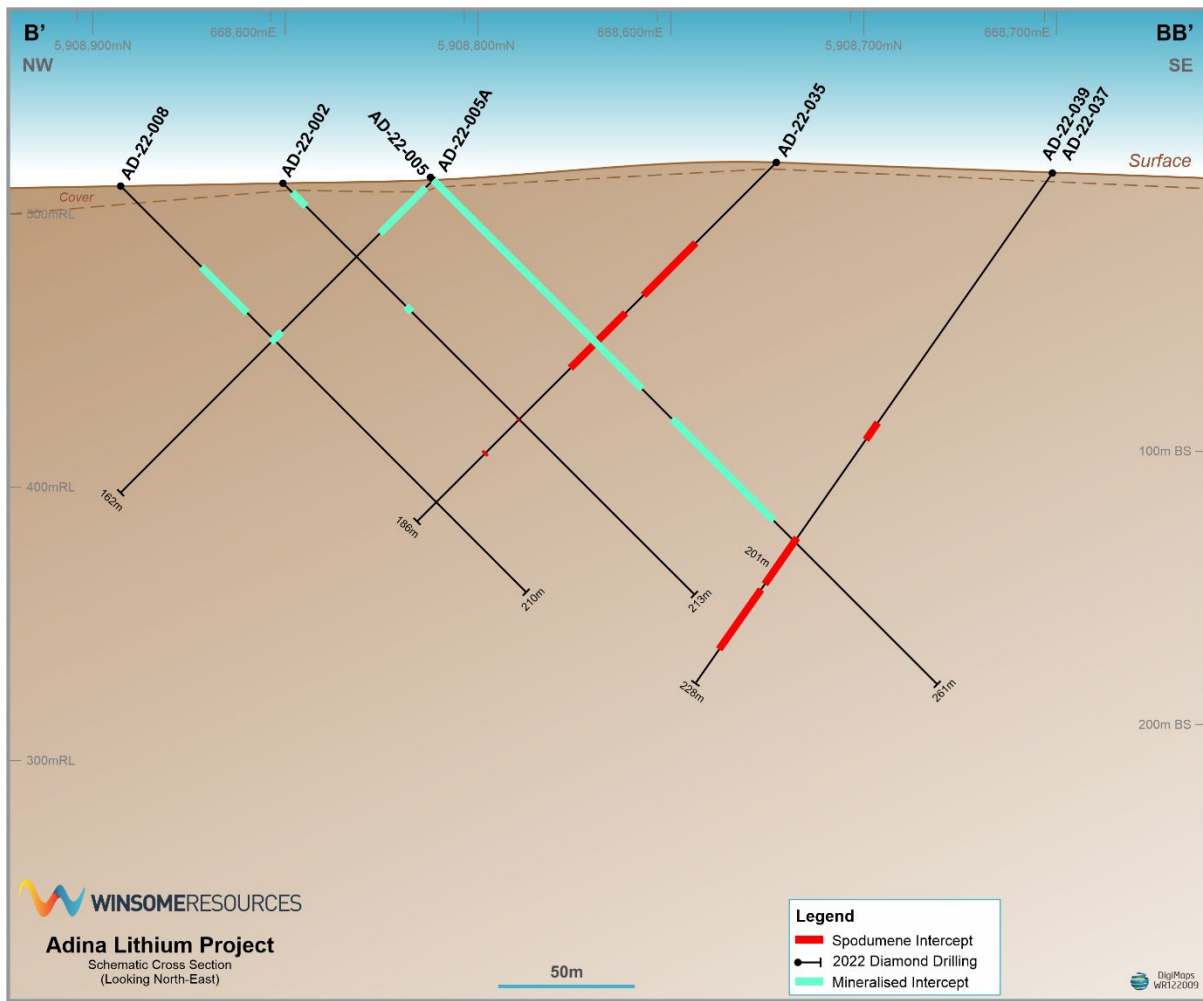


Figure 3: Section view looking North-East – Line B' – BB''

ABOUT WINSOME RESOURCES

Winsome Resources (ASX: WR1) is a Perth-based, lithium focused exploration and development company with five project areas in Quebec, Canada. Three of Winsome's projects – Cancet, Adina and Sirmac-Clappier are 100% owned by the Company. The Company has also expanded its lithium footprint in Quebec, with exclusive option agreements to acquire and explore 669 claims totalling 385km² in Decelles and a further 259 claims totalling 149km² at Mazerac, located near the Quebec mining town of Val-d'Or.

The most advanced projects - Cancet and Adina, provide shallow, high grade lithium deposits and are strategically located close to established infrastructure and supply chains. Winsome is led by a highly qualified team with strong experience in lithium exploration and development as well as leading ASX listed companies.

More details: www.winsomerresources.com.au

CAUTION REGARDING FORWARD-LOOKING INFORMATION

This document contains forward-looking statements concerning Winsome. Forward-looking statements are not statements of historical fact and actual events and results may differ materially from those described in the forward-looking statements as a result of a variety of risks, uncertainties and other factors. Forward-looking statements are inherently subject to business, economic, competitive, political and social uncertainties and contingencies. Many factors could cause the Company's actual results to differ materially from those expressed or implied in any forward-looking information provided by the Company, or on behalf of, the Company. Such factors include, among other things, risks relating to additional funding requirements, metal prices, exploration, development and operating risks, competition, production risks, regulatory, including environmental regulation and liability and potential title disputes.

Forward-looking statements in this document are based on the Company's beliefs, opinions and estimates of Winsome as of the dates the forward-looking statements are made, and no obligation is assumed to update forward-looking statements if these beliefs, opinions and estimates should change or to reflect other future developments.

COMPETENT PERSON'S STATEMENT

The information in this report which relates to Exploration Results is based on, and fairly represents, information and supporting documentation prepared by Mr Carl Caumartin, VP Exploration of Winsome Resources Ltd. Mr Caumartin is a member of the Quebec Board of Professional Engineers (OIQ, Canada) and he has sufficient experience which is relevant to the style of mineralisation and type of deposits under consideration and to the activity which has been undertaken to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves".

Mr Caumartin consents to the inclusion in this release of the matters based on the information in the form and context in which they appear. Mr Caumartin is a shareholder of Winsome.

Winsome confirms it is not aware of any new information or data which materially affects the information included in the original market announcements. Winsome confirms the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

-ends-

Appendix 1: Significant Drillhole Lithium Intercepts³.

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (degrees)	Azimuth (degrees)	From (m)	To (m)	Thickness (m)	Li ₂ O %
AD-22-001	668,477	5,908,772	511	-45	135	3.0	66.1	63.1	1.35
		including				3.0	11.0	8.0	1.61
		including				23.0	39.0	16.0	2.16
		including				60.4	66.1	5.7	2.37
		including				73.1	85.8	12.7	1.89
		further including				73.1	77.2	4.1	4.19
AD-22-002	668,503	5,908,851	511	-45	135	6.0	11.0	5.0	0.60
AD-22-005 ¹	668,542	5,908,812	513	-45	135	2.3	109.9	107.6	1.34
		including				2.3	23.0	20.7	1.52
		including				23.0	41.0	18.0	0.68
		including				41.0	71.0	30.0	2.21
		including				71.0	97.5	26.5	1.05
		including				103.0	109.9	6.9	0.96
AD-22-005A	668,542	5,908,812	513	-45	315	4.6	28.5	23.9	1.52
		including				4.6	18.5	13.9	2.04
						78.6	84.4	5.8	1.59
AD-22-007	668,430	5,908,809	510	-45	135	88.6	105.6	17.0	1.56
		including				98.6	105.6	7.0	2.72
						141.9	151.4	9.5	0.69
						232.8	287.0	54.2	1.04
		including				232.8	238.8	6.0	2.14
		including				249.0	260.0	11.0	1.14
		including				275.3	287.0	11.7	1.77
						324.6	343.6	19.0	0.88
		including				324.6	329.6	4.6	2.01
AD-22-008	668,460	5,908,892	510	-45	135	41.9	65.7	23.8	0.88
		including				41.9	48.9	7.0	1.31
		including				51.9	54.9	3.0	1.34
		including				60.5	63.5	3.0	1.89

¹ Assays previously reported. "Strong lithium mineralisation recorded from first Adina drill hole assays" ASX Announcement 6 January 2023

³ Intercepts calculated using a 0.3 % Li₂O cut-off grade, minimum 5m thickness and widths including up to 7m internal dilution.

For personal use only

Appendix 2: Diamond Drilling Summary for Winsome's drilling program at Adina.

Hole ID	Easting (NAD83)	Northing (NAD83)	RL (m)	Dip (Degrees)	Azimuth (Degrees)	Total Depth (m)
AD-22-001	668477	5908772	511	-45	135	171.0
AD-22-002	668503	5908851	511	-45	135	213.0
AD-22-003	668555	5908901	513	-45	135	138.0
AD-22-004	668513	5908739	511	-45	135	147.0
AD-22-005 ¹	668542	5908812	513	-45	135	261.0
AD-22-005A	668542	5908812	513	-45	315	162.0
AD-22-006	668596	5908861	515	-45	135	118.0
AD-22-006B	668596	5908861	515	-45	315	56.5
AD-22-007	668430	5908809	510	-45	135	390.0
AD-22-008	668460	5908892	510	-45	135	210.2
AD-22-009	668512	5908942	511	-45	135	246.0
AD-22-011	668687	5908776	517	-45	320	150.0
AD-22-034	668688	5909055	519	0	135	196.4
AD-22-035	668634	5908726	519	-45	315	186.0
AD-22-036	668687	5908776	517	-45	360	243.0
AD-22-037	668702	5908651	515	-45	315	228.0
AD-22-039	668702	5908651	515	-45	360	201.0
AD-22-041	668872	5908797	520	-45	360	213.0
AD-22-042	668968	5908803	520	-45	340	150.0
AD-22-043	670003	5909088	531	-45	340	141.1
AD-22-046	668968	5908803	520	-75	340	186.0
AD-22-055	668944	5908718	512	-55	330	300.0
AD-22-059	668944	5908718	512	-82	330	204.0
AD-23-044	670165	5909126	533	-45	340	168.0
AD-23-045	670312	5909224	533	-45	330	114.0
AD-22-048	668702	5908651	515	-75	360	297.0
AD-23-053	669034	5908748	512	-45	360	187.0
AD-23-054	669090	5908854	512	-45	360	231.0
AD-23-057	669034	5908748	512	-65	360	213.0
AD-23-060	669034	5908748	512	-85	240	240.0
AD-23-071	669094	5908773	512	-85	360	334
AD-23-072	669094	5908773	512	-65	360	252

Legend:

- AD-22-005 Assays previously reported
- AD-22-001 Assays reported in this announcement
- AD-22-006 Assays awaited, collar/lithological data reported previously
- AD-22-060 Assays awaited, collar/lithological data reported in this announcement

¹ Assays previously reported. "Strong lithium mineralisation recorded from first Adina drill hole assays" ASX Announcement 6 January 2023.

For personal use only

Appendix 3 – Visual estimates of mineralisation intersections in Adina diamond drill holes where assays are yet to be received (main sampling intervals).

Hole ID	From (m)	To (m)	Thickness (m)	Visual Estimate %
AD-22-003	84.0	91.8	7.8	Pegmatite – spodumene observed
AD-22-004	87.1	96.6	9.5	Pegmatite – spodumene observed
AD-22-006	2.2	77.3	75.1	Pegmatite – spodumene observed
AD-22-006	105.6	112.8	7.2	Pegmatite – spodumene observed
AD-22-006B	1.0	14.0	13.0	Pegmatite – spodumene observed
AD-22-008	41.1	65.7	24.6	Pegmatite – spodumene observed
AD-22-009	204.2	207.4	3.2	Pegmatite – spodumene observed
AD-22-011	28.8	81.4	52.6	Pegmatite – spodumene observed
AD-22-034	111.9	130.3	18.4	Pegmatite – spodumene observed
AD-22-035	41.7	106.8	65.1	Pegmatite – spodumene observed
AD-22-036	27.0	83.5	56.5	Pegmatite – spodumene observed
AD-22-036	191.0	196.5	5.5	Pegmatite – spodumene observed
AD-22-037	162.3	213.1	50.8	Pegmatite – spodumene observed
AD-22-039	128.0	169.3	41.3	Pegmatite – spodumene observed
AD-22-041	26.3	71.3	45.0	Pegmatite – spodumene observed
AD-22-042	30.7	80.5	49.8	Pegmatite – spodumene observed
AD-22-046	43.1	91.8	48.7	Pegmatite – spodumene observed
AD-22-043	62.3	79..4	17.1	Pegmatite – spodumene observed
AD-22-055	94.5	109.4	14.9	Pegmatite – spodumene observed
AD-22-059	118.2	170.4	52.2	Pegmatite – spodumene observed
AD-23-044				Logging/sampling in progress
AD-23-045				Logging/sampling in progress
AD-22-048				Logging/sampling in progress
AD-23-053				Logging/sampling in progress
AD-23-054				Logging/sampling in progress
AD-23-057				Logging/sampling in progress
AD-23-060				Logging/sampling in progress
AD-23-071				Logging/sampling in progress

Legend:

- AD-22-005 Assays previously reported
- AD-22-001 Assays reported in this announcement
- AD-22-006 Assays awaited, collar/lithological data reported previously
- AD-22-060 Assays awaited, collar/lithological data reported in this announcement

The Company reminds investors that the presence of spodumene crystals within pegmatite does not necessarily equate to lithium mineralisation or indicate the percentage of lithium mineralisation, which can only be accurately confirmed by chemical assays. When such laboratory results become available, they will be reported in full in a future report.

Visual estimates have been removed from this table for holes where assays have been received and reported (refer Appendix 1).

For personal use only

JORC Code, 2012 edition Table 1
Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	Explanation
Sampling techniques	<ul style="list-style-type: none"> All core is NQ (76mm) in this program. Core sample intervals were geologically logged, measured for average length, photographed, and placed into numbered core trays. Sample were sent to SGS Minerals Geochemistry under standard preparation procedures.
Drilling techniques	<ul style="list-style-type: none"> NQ diamond drilling was completed at Adina. Oriented core drilling was not completed. Downhole surveying was conducted using a gyro-based system.
Drill sample recovery	<ul style="list-style-type: none"> The recovery of the diamond drilling samples was reported by the operators and supervised by our consulting geologist. No sample bias has been established.
Logging	<ul style="list-style-type: none"> NQ core was logged and cut according to geological boundaries, with ~1 m intervals targeted for individual samples. Features such as rock type, modal mineralogy, rock textures, alteration were recorded. Geological logging information was recorded directly onto the Geotic Logger system and compiled onto Database platform, with weekly backups. The core is stored in the Geological consultants (TechnoMinex) yard in Rouyn-Noranda which is a secure location. Various qualitative and quantitative logs were completed. All core has been photographed. The logging database contains lithological data for all intervals in all holes in the database.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> Drill core was split (sawn) by TechnoMinex facilities in Rouyn-Noranda("RN"), QC; half core sample intervals submitted to SGS preparation facilities in Sudbury, ON; - 250gr pulp sub-samples were analysed at SGS analytical facilities in Burnaby, BC; Pulps and coarse rejects to be returned to Winsome, for storage at TechnoMinex facilities in RN. Laboratory QC procedures for drill core assays involve the use of internal certified reference material as assay standards, along with blanks, duplicates and replicates.
Quality control & Quality of assay data and laboratory tests	<ul style="list-style-type: none"> Industry standard assay quality control techniques were used for lithium related elements. Assay and laboratory procedures have been selected following a review of techniques provided by internationally certified laboratories. Samples are submitted for multi-element ICP analysis by SGS, which is applicable for high-grade lithium analysis

For personal use only

Criteria	Explanation
	<ul style="list-style-type: none"> • Sodium Peroxide Fusion is used followed by combined ICP-AES and ICP-MS analyses (56 elements). Li is reported by the lab and converted to Li₂O for reporting using a factor of 2.153 • No handheld instruments were used for analysis • Comparison of results with standards indicate sufficient quality in data. No external laboratory checks have been used but are planned to be completed shortly. • Different grades of certified reference material (CRM) for lithium mineralisation were inserted, as well as field duplicates, and blanks. The CRM's submitted represented a weakly mineralised pegmatite (OREAS 750), and a moderate lithium mineralised pegmatite (AMIS 0341) to high grade lithium mineralised pegmatite (OREAS 752 & 753). Quality Assurance and Quality Control utilised standard industry practice, using prepared standards, field blanks (approximately 0.4 kg), duplicates sampled in the field and pulp duplicates at the lab. • Blank samples were submitted at a rate of approximately 5%, same for duplicates and repeat assay determinations, whereas standards were submitted at a rate of approximately 20%.
Verification of sampling and assaying	<ul style="list-style-type: none"> • Hard copy field logs are entered into and validated on an electronic Excel database, both of which are stored at the Winsome Perth office and with Technominex. • Data verification was carried out by the Project Geologist on site, and a final verification was performed by a Senior Geologist at the Technominex core handling facilities in Rouyn Noranda. • Diamond core drilled was photographed on site where a preliminary geological logging was performed. Core boxes were then crated and ship to Technominex handling facilities for detailed logging and sample splitting/cutting. • Half core samples were packaged and ship to the SGS Sudbury Laboratory facilities Ontario, for preparation. • No assays have been adjusted. A factor of 2.153 has been applied to the reported Li assays so to report as Li₂O.
Location of data points	<ul style="list-style-type: none"> • The drill holes have been reported as being located by hand-held GPS. Historical drill holes have been verified by GPS. • The grid datum is NAD83. Zone 18N. • Topographic elevation and landmarks are readily visible from a Digital Elevation Model with a 50cm grid resolution and orthophoto obtained from Lidar surveys performed in 2017 and 2022 over the property. Government topographic maps have been used for topographic validation. The GPS is otherwise considered sufficiently accurate for elevation data. • Down hole dip surveys were taken at approximately 30m intervals and at the bottom of the diamond drill holes.

For personal use only

Criteria	Explanation
Data spacing and distribution	<ul style="list-style-type: none"> In this early delineation stage, drilling is largely set along sections at 100m spacing and aiming to intercept targeted horizon at 80-100m centres. No assessment has been made regarding the current drill hole location and intersections with respect to resources or reserve estimation. No sample compositing has been completed. However, internal dilution of non-mineralised material into calculated grade over widths reported herein may occur but is not considerable.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> Drilling is designed to confirm the historical drilling results and test potential mineralisation. They were oriented sub-perpendicular to the potential mineralised trend and stratigraphic contacts as determined by field data and cross section interpretation. Intersection widths will therefore be longer than true widths. No significant sample bias has been identified from drilling due to the optimum drill orientation described above. Where present, sample bias will be reported.
Sample security	<ul style="list-style-type: none"> The company takes full responsibility on the custody including the sampling process itself and transportation. Samples were shipped via accredited transporter KEPA Transport from project site to Technominex facilities in Rouyn-Noranda, where samples were split and then delivered to SGS facilities in Sudbury for sample preparation
Audits or reviews	<ul style="list-style-type: none"> No external audit of the database has been completed, apart for the consulting geologists acting on behalf of the company. Drill hole sample data is verified at time of entry into excel as well as when assays are linked.

Section 2 Reporting of Exploration Results

(Criteria in the preceding section also apply to this section.)

Criteria	Explanation
Mineral tenement and land tenure status	<ul style="list-style-type: none"> The Winsome Adina Lithium Project is a 100% owned by Winsome Adina Lithium Inc. All tenements are in good standing and have been legally validated by a Quebec lawyer specialising in the field.
Exploration done by other parties	<ul style="list-style-type: none"> Initial Exploration and Review was undertaken by MetalsTech Limited. Government mapping records multiple lithium bearing pegmatites within the project areas with only regional data available.
Geology	<ul style="list-style-type: none"> The mineralisation encountered at the Adina project is typical of a Lithium-Caesium-Tantalum (LCT) type of pegmatite. The pegmatite body is oriented sub-parallel to the general strike of the host rocks. The host rocks are composed of Archean Lac Guyer greenstone rocks, which include

Criteria	Explanation
	mafic and ultramafic rocks interlayered with horizons of metasedimentary and felsic volcanic rocks
Drill hole Information	<ul style="list-style-type: none"> For the current drill program, the following information has been included for all holes reported: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (reduced level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception level hole length A summary of drill hole information was included in the Company's prospectus within the Independent Geologists Report prepared by Mining Insights pages 19-38 and Table 3 of Appendix B, pages 69 and 70
Data aggregation methods	<ul style="list-style-type: none"> No sample weighting or metal equivalent values have been used in reporting. Aggregation issues are not considered material at this stage of project definition. No metal equivalent values were used
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> The pierce angle of the drilling varies from hole to hole, in order to attempt, wherever possible, to represent true widths
Diagrams	<ul style="list-style-type: none"> See figures and maps provided in the text of the announcement.
Balanced reporting	<ul style="list-style-type: none"> Winsome Resources Ltd will endeavour to produce balanced reports accurately detailing the results from any exploration activities. All drillholes and intersections have been presented in this announcement and in previous announcements.
Other substantive exploration data	<ul style="list-style-type: none"> No other substantive exploration data is available at this time.
Further work	<ul style="list-style-type: none"> Winsome Resources Ltd continues to complete further site investigations. Further work planned includes comprehensive data interpretation, field mapping and exploration drilling.