

THICK HIGH-GRADE NICKEL INTERCEPTED IN FIRST DRILL HOLES AT DFW PROSPECT

HIGHLIGHTS

- Five RC holes were drilled to test Kambalda nickel ore deposit model at Dordie Far West (DFW), part of the Widgiemooltha Project
- Three holes returned significant nickel results from first pass 3m composite RC samples, including:
 - WDR002 15m @ 1.86% Ni from 27m downhole, incl. 6m @ 2.4% Ni
 - WDR003 15m @ 1.11% Ni from 30m downhole
 - WRD003 12m @ 1.58% Ni from 48m downhole, incl. 3m @ 2.0% Ni
 - WDR005 3m @ 1.38% Ni from 30m downhole
- Detailed geochemical analysis on 1m split samples will be undertaken to confirm the nickel mineralisation model and determine follow up drill program
- Dynamic fully funded for exploration across its critical minerals portfolio following completion of \$7M IPO in January 2023

Dynamic Metals Limited (ASX:DYM) (“Dynamic” or “the Company”), a newly listed ASX lithium, nickel and gold explorer, is pleased to announce assay results from its first drill program at the Dordie Far West (“DFW”) nickel prospect, part of the larger Widgiemooltha Project (“Widgiemooltha” or the “Project”) in the Goldfields Region of Western Australia.

DFW is located on the northwest margin of the Widgiemooltha dome on E15/1680, where anomalous nickel results were detected in RC drilling completed by Mincor Resources Limited (ASX:MCR) in the late 2000s (Figure 1)^{1,2}. After review of the historic data, a drill program was designed to test for Kambalda komatiite type massive sulphide mineralisation interpreted to occur where the base of the komatiite stratigraphy is in contact with the underlying basalt, known as the ‘basal contact’.

Five Reverse Circulation (RC) holes were drilled for a total of 736m at the prospect in February 2023, with drilling undertaken on four sections over a strike length of approximately 300m (Figure 1). Drill hole collar positions and significant drill hole results from 3m composite RC samples are shown in Figure 1: and Table 1.

Importantly, the thick widths and high-grade tenor intersected in Dynamic’s drilling compare favourably with the historic drilling, confirming and enhancing the potential for significant mineralisation along this trend.

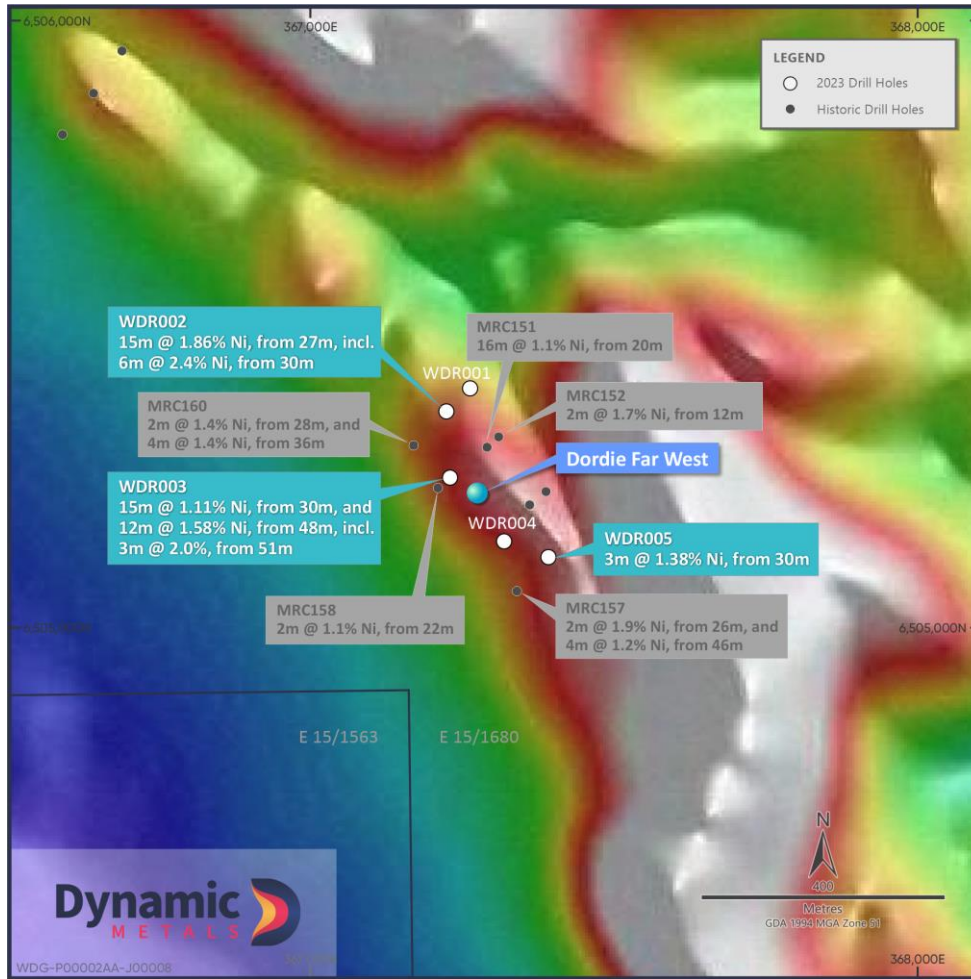


Figure 1: Drill hole positions and significant results at Dordie Far West

Table 1: Significant Nickel intercepts from 3m composite samples (cutoff 3m >1%Ni)

Hole	From	To	Interval	Ni %	Comments
WDR002	27	42	15	1.86	Including 6m @ 2.40% Ni
WDR003	30	45	15	1.11	
WDR003	48	60	12	1.58	Including 3m @ 2.0% Ni
WDR005	30	33	3	1.38	

The grade and thickness of the 3m composite samples from WDR002 and WDR003 are significant and whilst the results are returned from within the weathered profile (rather than fresh rock), the >1% Ni limit plotted on both sections (

For personal use only

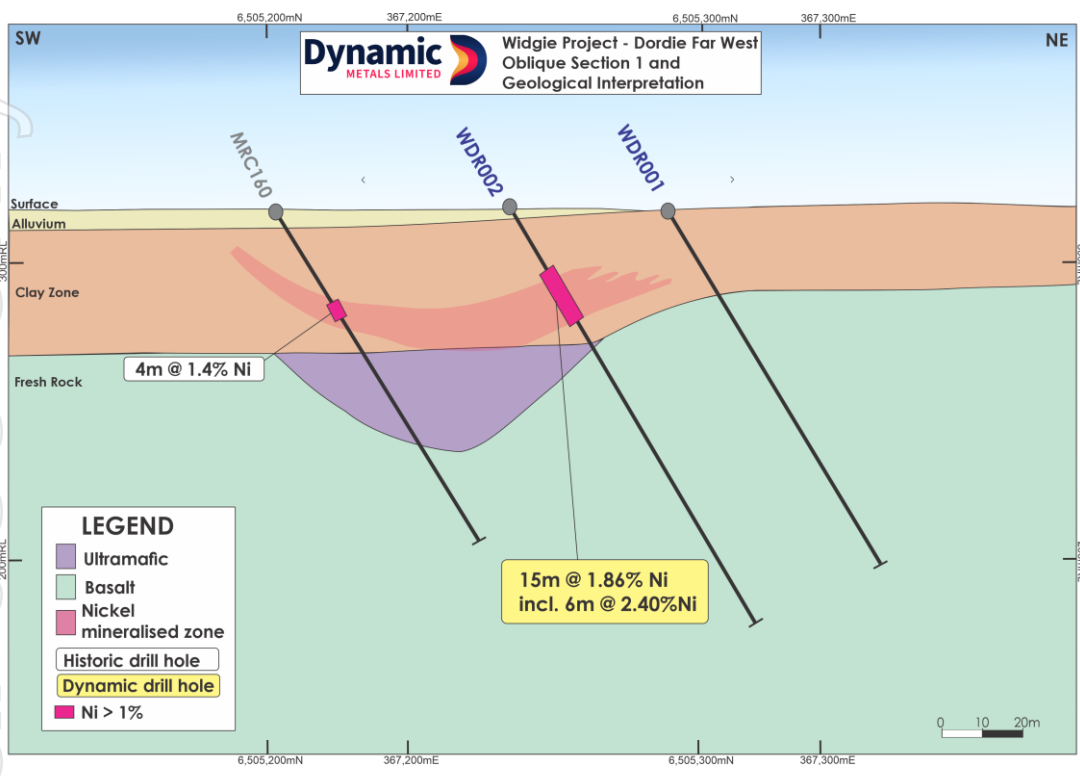


Figure 2 and Figure 3) and projected to surface indicates the potential for fresh rock nickel sulphides within a southerly plunging structure. Notably weathered sulphide box work textures were observed in geological logging of WDR003 between 51-54m.

For personal use only

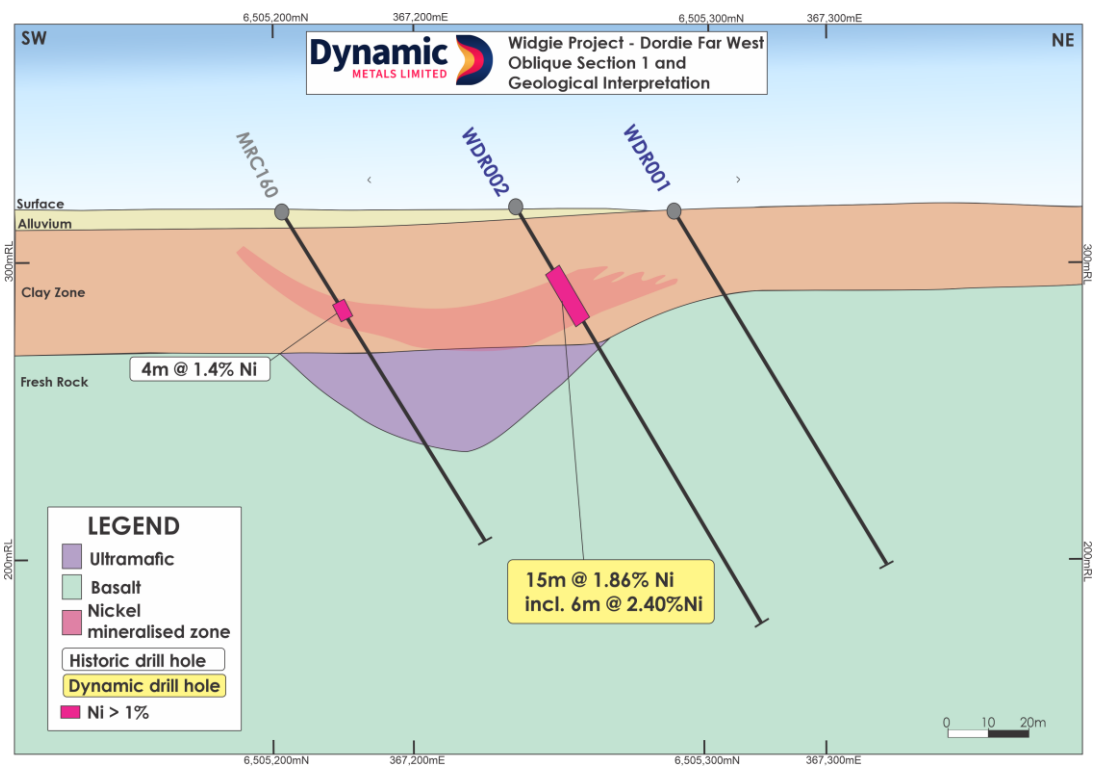


Figure 2: Section WDR002

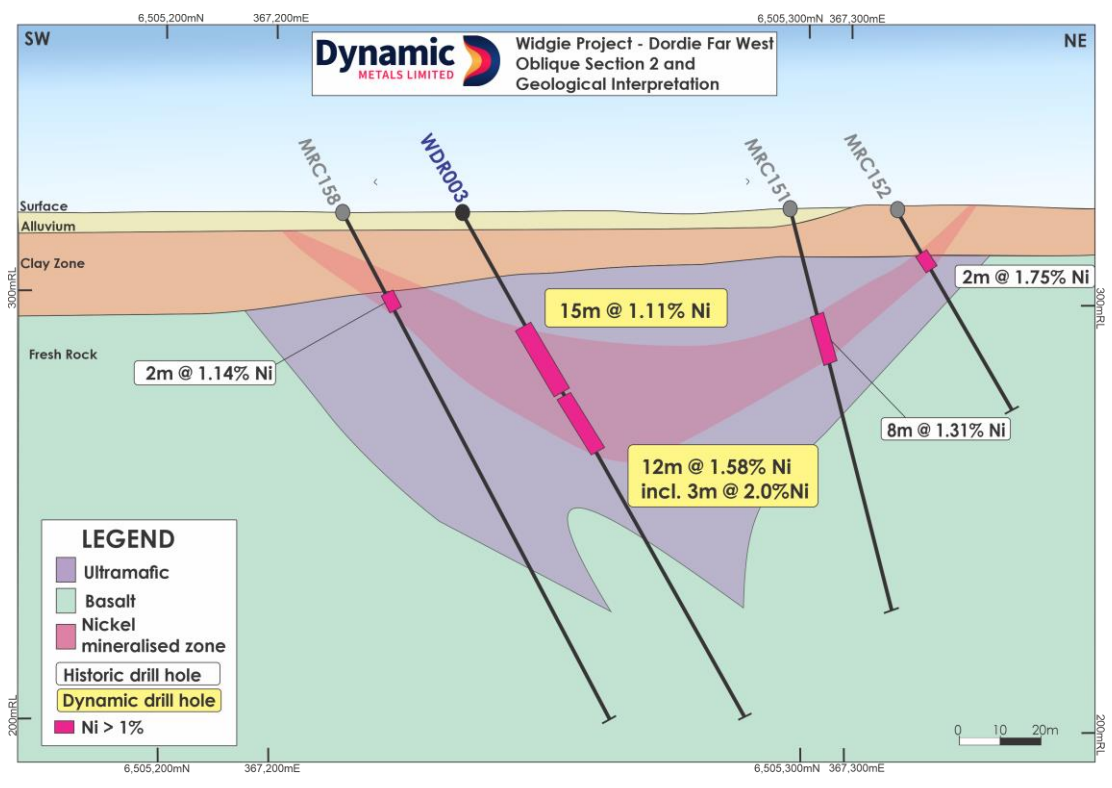


Figure 3: Section WDR003

Managing Director, Karen Wellman, commented:

“Returning thick and high-grade nickel intersections from our first five holes is an outstanding result from our maiden drill program at DFW. This is an excellent start to our first exploration campaign and we will prioritise our follow-up drill program, with an aim to further extend these intercepts at the Widgiemooltha Project.”

This is the first of four fully permitted drill programs expected to be completed at the Widgiemooltha Project during the first half of 2023, in addition to a regional Air Core (AC) program currently underway at the Lake Percy Project.

Next Steps

The Dynamic team will submit 1m samples from the significant 3m composite intercepts to the laboratory for further assaying. Results from the 1m composites will be used to update the geological model at the Dordie Far West prospect to determine the next phase of drilling.

At the Lake Percy Project, an AC rig is currently undertaking a 6,000m drill program³ intended to obtain fresh rock samples of the bedrock geology for geochemical analysis in areas of interest for nickel mineralisation. It is anticipated the program will also provide additional information on the nature and extent of pegmatites in the region.

Released with the authority of Dynamic Metals' Board of Directors.

For further information on the Company and our projects, please visit: www.dynamicmetals.com.au

CONTACT

Karen Wellman

Managing Director

enquiry@dynamicmetals.com.au

+61 8 9321 7550

ABOUT DYNAMIC METALS

Dynamic Metals (ASX: DYM) is a dedicated exploration company focused on advancing a highly prospective portfolio of future facing critical minerals projects in Australia. The Company completed a successful IPO in January 2023 raising \$7 million to fully fund an aggressive exploration program across the portfolio.

Dynamic's flagship project, Widgiemooltha, covers an extensive area of c.880km² extending between Norseman and Kambalda. The region is well known for its numerous nickel and gold mines, but more recently has emerged in significance for its lithium mineralisation and prospectivity.


DYNAMIC METALS CAPITAL STRUCTURE

Share Price: \$0.14/share

Cash at IPO: \$7.0M

Shares on Issue: 49M

Market Cap: \$6.9M

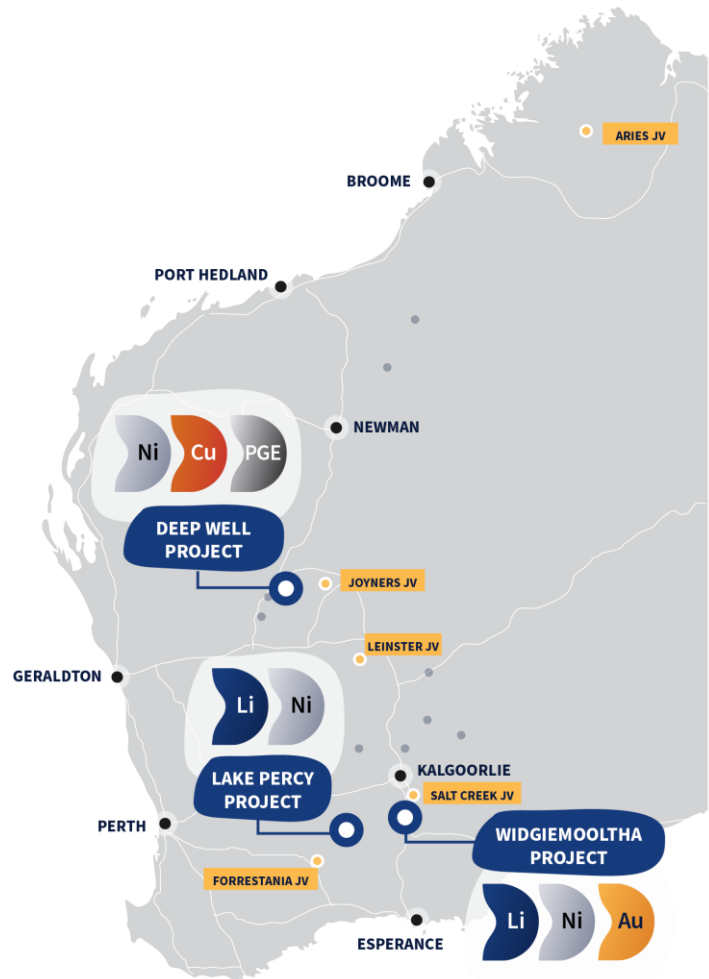

Portfolio of future-facing critical minerals projects in Australia



Exposure to global decarbonisation and battery metals thematic



Substantial exploration targets generated across Li, Ni, Cu, PGE and Au



Team has extensive experience and successful track record



On-ground activities are complete and ready to commence drilling



Attractive valuation and leverage to exploration success



REFERENCES

Additional details including JORC 2012 reporting tables, where applicable, can be found in the following releases lodged with ASX and referred to in this announcement:

1. Dynamic Metals ASX Disclosure 12/01/2023: “Prospectus”
2. Dynamic Metals ASX Announcement 31/01/2023: “Rig mobilises for first drill program at Widgiemooltha”
3. Dynamic Metals ASX announcement 10/03/2023: “Nickel drilling commences at Lake Percy”

COMPETENT PERSONS STATEMENT

The information in this report that relates to Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Mrs Karen Wellman. Mrs Wellman is an employee of the Company and a Member of the Australasian Institute of Mining and Metallurgy. Mrs Wellman has sufficient experience relevant to the styles of mineralisation and types of deposits under consideration, and to the activity being undertaken, to qualify as Competent Persons as defined in the 2012 Edition of the ‘Australasian Code for Reporting of Exploration Results, Minerals Resources and Ore Reserves.’ Mrs Wellman consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.

FORWARD LOOKING STATEMENT

This document may contain certain forward-looking statements. Forward-looking statements include but are not limited to statements concerning Dynamic Metals Limited’s (Dynamic’s) current expectations, estimates and projections about the industry in which Dynamic operates, and beliefs and assumptions regarding Dynamic’s future performance. When used in this document, the words such as “anticipate”, “could”, “plan”, “estimate”, “expects”, “seeks”, “intends”, “may”, “potential”, “should”, and similar expressions are forward-looking statements. Although Dynamic believes that its expectations reflected in these forward-looking statements are reasonable, such statements are subject to known and unknown risks, uncertainties and other factors, some of which are beyond the control of Dynamic and no assurance can be given that actual results will be consistent with these forward-looking statements.

1 ANNEXURE A

Drilling Table and Significant Intersections – Dordie Far West Prospect

Hole ID	Collar Coordinates (MGA)			EOH Depth	Dip	Azi	From	To	Interval	Ni (%)	Comments
	Northing	Easting	RL								
WDR001	6505394	367263	318	138	-60	45				NSR	
WDR002	6505356	367224	319	162	-60	45	27	42	15	1.86	Including 6m at 2.40% Ni from 30m
WDR003	6505247	367230	320	136	-60	45	30	45	15	1.11	No sample returned 45-48m
							48	60	12	1.58	Including 13m @ 2.00% Ni from 51m Samples 48-55m logged as 'wet'
WDR004	6505142	367319	323	150	-60	45				NSR	
WDR005	6505116	367392	324	150	-60	45	30	33	3	1.38	

Note: Significant intersections are defined by minimum 3m downhole length greater than 1% Ni and maximum of 3m internal dilution.
NSR means "No significant result" that means the assays did not meet the criteria above.

2 ANNEXURE B

JORC Code 2012 Edition – Table 1 Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
Sampling Techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> RC drilling was used to collect samples at 1m intervals. Approximately 2-4kg was collected from each interval in a calico bag using a rig mounted rotary splitter Calico bag samples from each meter were made up into 3m composite samples using a riffle splitter and were placed into individually labelled, consecutively numbered sample bags. The RC samples obtained are considered representative of the material drilled.
Drilling Techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Drilling was completed using conventional RC drilling techniques.
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> RC sample recovery was assessed by the sample produced from the rig mounted rotary splitter and recorded in logging sheets.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, 	<ul style="list-style-type: none"> Qualitative lithological descriptions (colour, weathering, grain size, lithology, mineralogy, veining textures and other significant features) were recorded by the field geologist.

Criteria	JORC Code explanation	Commentary
	<p>channel, etc) photography.</p> <ul style="list-style-type: none"> The total length and percentage of the relevant intersections logged. 	
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> 1m RC samples were made into 3m composites by riffle splitting 1m calico samples delivered from the rig mounted cyclone. The sample size is considered appropriate for the grain size of the material being sampled Duplicate samples were taken approximately 1 in 50 samples
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> All samples were initially analysed for nickel using ME-ICP61 (four acid digest followed by analysis using inductively coupled plasma atomic emission spectroscopy). Any samples showing >1% nickel were re-assayed using ME-OG62 (4 acid diges and analysis using atomic emission spectroscopy). Field blanks were inserted in the sample sequence approximately 1 in 100 samples Field standards were inserted in the sampel sequence approximately 1 in 33 samples The laboratory completed industry standard QAQC
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data 	<ul style="list-style-type: none"> Assay results were verified by more than one Dynamic geologist.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Sample locations were surveyed using a handheld GPS positions were also checked against a Digital Elevation Model (DEM). Locations are reported in metres GDA94 MGA Zone 51. A Reflex multishot tool was used for end of drill hole deviation surveys

Criteria	JORC Code explanation	Commentary
Data spacing and distribution	<ul style="list-style-type: none"> • <i>Data spacing for reporting of Exploration Results.</i> • <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i> • <i>Whether sample compositing has been applied.</i> 	<ul style="list-style-type: none"> • RC samples were combined into 3m composites. • No Mineral Resources have been estimated.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i> • <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assess and reported if material.</i> 	<ul style="list-style-type: none"> • Intervals reported are not considered true widths. • There is not enough information to make assumptions regarding drillhole orientation.
Sample security	<ul style="list-style-type: none"> • <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> • Samples were subject to industry standard sample security methods.
Audits or reviews	<ul style="list-style-type: none"> • <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> • No audits have been completed at this stage.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<ul style="list-style-type: none"> The Dordie Far West prospect and historic drilling are located on exploration licence E 15/1680 which is owned by Dynamic. No joint ventures or royalty interests are applicable.
Exploration done by other parties	<ul style="list-style-type: none"> Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> Nil
Geology	<ul style="list-style-type: none"> Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> Reported nickel mineralisation is of the Kambalda komatiite nickel sulphide deposit ore type.
Drill hole Information	<ul style="list-style-type: none"> A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> Please see table and figures in main body of text.
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> Significant intercepts are presented as a simple average above a 1% Ni cut-off with no internal waste and a minimum thickness of 3m2m.

Criteria	JORC Code explanation	Commentary
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • <i>These relationships are particularly important in the reporting of Exploration Results.</i> • <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i> • <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i> 	<ul style="list-style-type: none"> • Downhole lengths reported are true widths are not known.
Diagrams	<ul style="list-style-type: none"> • <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i> 	<ul style="list-style-type: none"> • See main body of announcement.
Balanced reporting	<ul style="list-style-type: none"> • <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i> 	<ul style="list-style-type: none"> • All drilling results above a cut-off of 1% Ni are regarded as significant and have been reported.
Other substantive exploration data	<ul style="list-style-type: none"> • <i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i> 	<ul style="list-style-type: none"> • No additional observations at this time.
Further work	<ul style="list-style-type: none"> • <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i> • <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i> 	<ul style="list-style-type: none"> • Complete analysis of 1m RC samples • Further RC drilling to test targets generated.