

## Massan returns further broad oxide gold intercepts incl. 57m @ 1.1 g/t gold from surface

West African gold explorer Golden Rim Resources Ltd (ASX: GMR; **Golden Rim** or **Company**) is pleased to announce gold assay results for the final 14 reverse-circulation (**RC**) holes (totalling 1,487m) from drilling of the Massan MRE area at its flagship Kada Gold Project (**Kada**) in Guinea.

### Highlights

- **All RC drilling assays now returned** from major drilling campaign at Massan and Bereko
- Notable gold intersections include:
  - MSRC042: **57m @ 1.1 g/t gold** from 0m, including **10m @ 2.3 g/t gold** from 3m  
**41m @ 0.6 g/t gold** from 61m (EOH mineralised)
  - MSRC034: **95m @ 0.6 g/t gold** from 18m, including **17m @ 1.3 g/t gold** from 75m
  - MSRC031: **36m @ 1.2g/t gold** from 0m, including **7m @ 3.3 g/t gold** from 20m
  - MSRC030: **48m @ 0.8 g/t gold** from 0m, including **14m @ 1.4 g/t gold** from 13m
  - MSRC040: **44m @ 0.9 g/t gold** from 30m, including **15m @ 1.5 g/t gold** from 46m
  - MSRC032: **34m @ 0.9 g/t gold** from 86m, including **4m @ 1.7 g/t gold** from 111m
  - MSRC037: **23m @ 1.2 g/t gold** from 0m, including **7m @ 2.1 g/t gold** from 0m  
**17m @ 1.4 g/t gold** from 44m
- **3,500m diamond drilling (DD)** at Bereko and Massan is progressing well, 2,351m drilled to date.
- **Massan has an existing Mineral Resource Estimate (MRE) of 930,000oz gold<sup>1</sup> – preparation of updated Massan MRE and maiden Bereko MRE on track for delivery in 2023.**

**Golden Rim's Managing Director, Tim Strong, commented:** "After extensive field mapping and trenching indicated more gold mineralisation within and around the Mineral Resource area, we opted to drill these additional 14 RC holes at Massan, aimed at either confirming new structures noted during the trenching or obtaining additional information in areas of poorer data density.


"RC drilling at Massan and Bereko has been a great success, with every hole intercepting significant gold mineralisation, including several high-grade intercepts. Excitingly, we have intercepted broad zones of gold mineralisation in multiple drilling orientations, bolstering our working understanding of the geologic controls on mineralisation. We will use this new data, along with the valuable information from our ongoing DD drilling program, to deliver a MRE update later in 2023."

<sup>1</sup> ASX release dated 3 March 2022: Kada Maiden Mineral Resource 930koz Gold

**Kada Exploration Drilling**

Golden Rim commenced a 10,000m RC drilling program at Kada in mid-December 2022. The program comprised of exploration drilling at the Bereko Prospect and north of the MRE area within the Massan Prospect, as well as some resource extension and infill drilling around the margins of the MRE. In addition, a 3,500m DD program testing open mineralisation and providing structural information commenced in March 2023, and a 3,000m air core drilling program targeting new discoveries is now complete, with final assay results announced on 11 May 2023


Drill hole collar details are provided in Table 1 and the hole locations are depicted on Figure 1. All significant new gold intersections ( $\geq 3\text{m} \times \text{g/t}$  gold) are presented in Table 2.

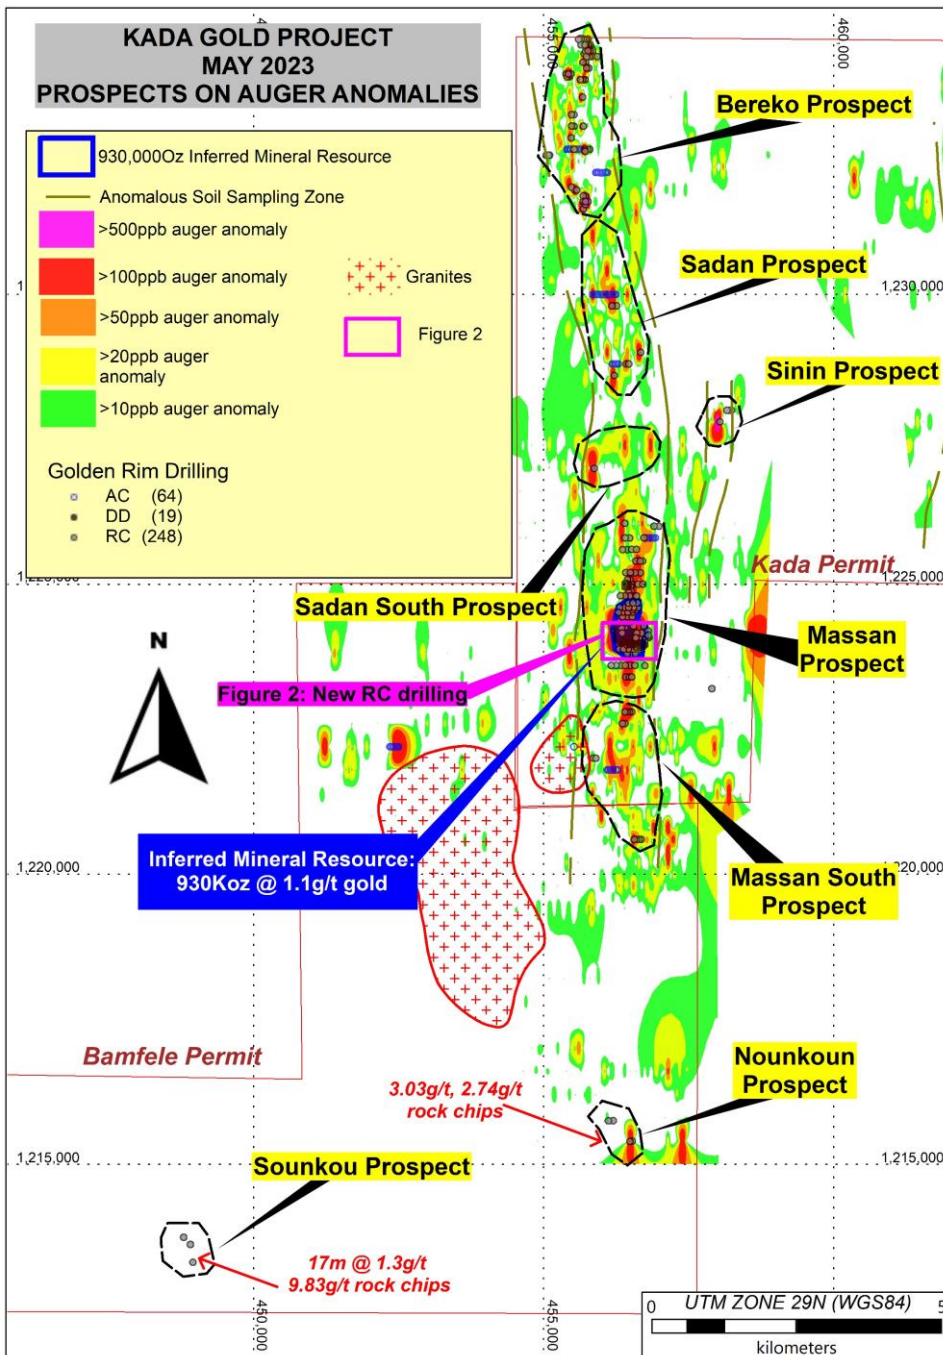

**Figure 1:** Kada Gold Project showing location of prospects and collars on auger results.

**RC Drilling**

Golden Rim has received results for the final 14 RC holes (1,487m) drilled at the Massan prospect, designed to test areas of open mineralisation or to infill areas of low confidence. Holes were drilled in multiple orientations to ensure mineralisation in all directions was understood (Figure 2).

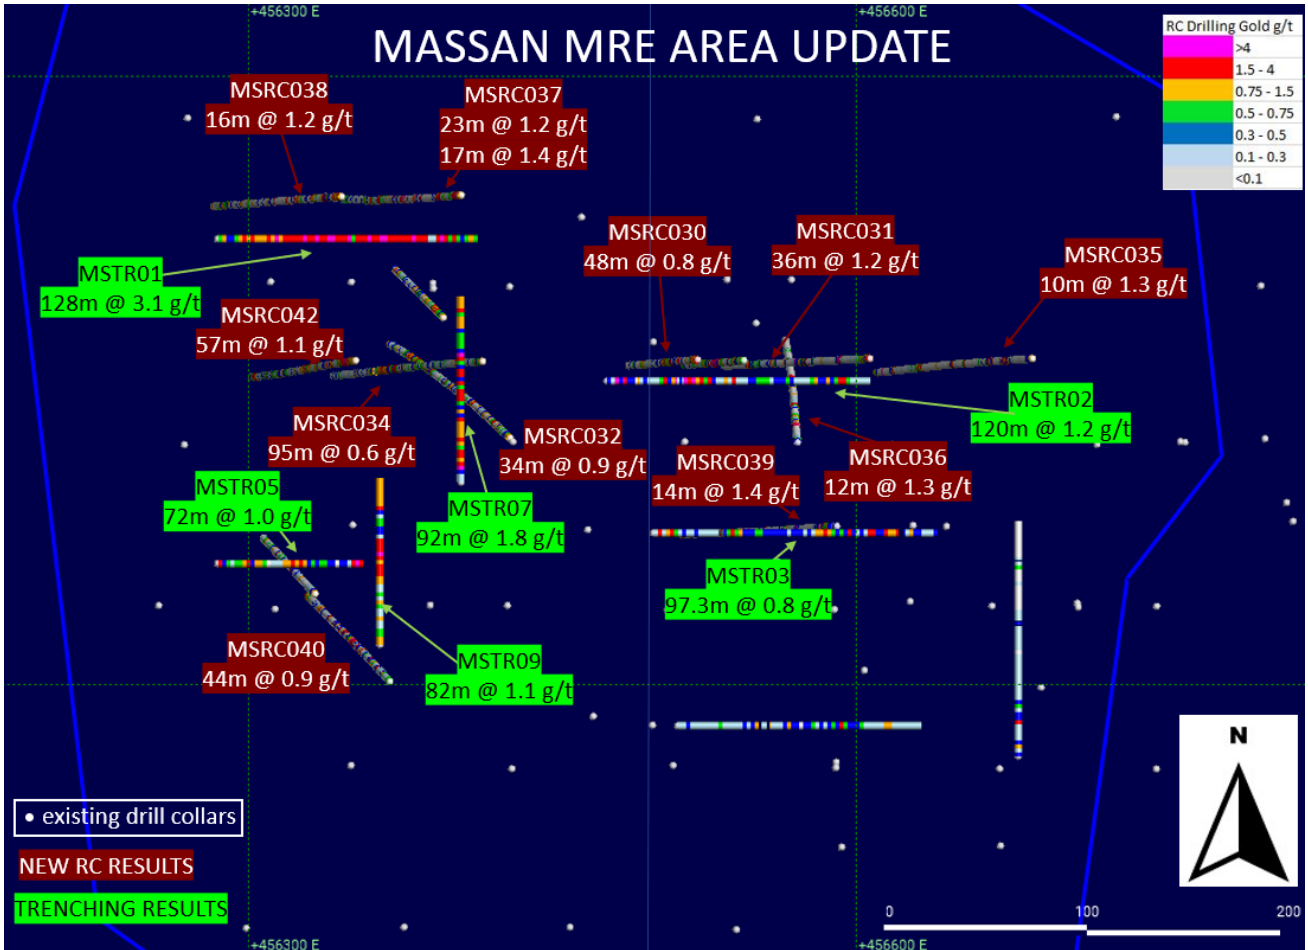

**Figure 2:** Massan MRE area with new RC drilling results (red) and recent trench results (green). See pink box in Fig 1 for location.

Drillholes MSRC029 to MSRC031 were drilled on the 1,224,160m Northing, just north of MSTR02 which returned **120m @ 1.2 g/t gold** including **14m @ 3.8 g/t gold**. These holes were drilled to test the down-dip continuity of the steeply east-dipping mineralised zones encountered in MSTR02. Encouragingly, MSRC031 intercepted **7m @ 3.3 g/t gold** from 20m and MSTR030 intercepted **16m @ 1.4 g/t gold** from 13m, both directly downdip of MSTR02’s high-grade zone (Figure 3). Mineralisation here is associated with the margin between siltstone and greywacke units and features strong hematite oxidation and abundant sulphides.

MSRC034 and MSRC042 were also drilled on the 1,224,160m Northing, further west (Figure 3). These holes infilled a zone of poor drilling density, south of drilling undertaken in 2021 which included intercepts up to **28m @ 2.4 g/t gold<sup>2</sup>**. MSRC042’s **57m @ 1.1 g/t gold** from surface includes a higher-grade intercept of **10m @ 2.3 g/t gold** from 3m and confirms that there is continuity in the high-grade zones of >40m. This hole is dominated by strongly hematite altered sedimentary rocks

<sup>2</sup> ASX release dated 14 December 2021: Kada Delivers Widest Oxide Gold Intersection to Date - 62m at 1.3ppm Gold

with abundant quartz (up to 10% in mineralised zones). MSRC034 intercepted 95m @ 0.6 g/t gold from 18m, with mineralisation extending down into the fresh rock approximately 100m below surface.

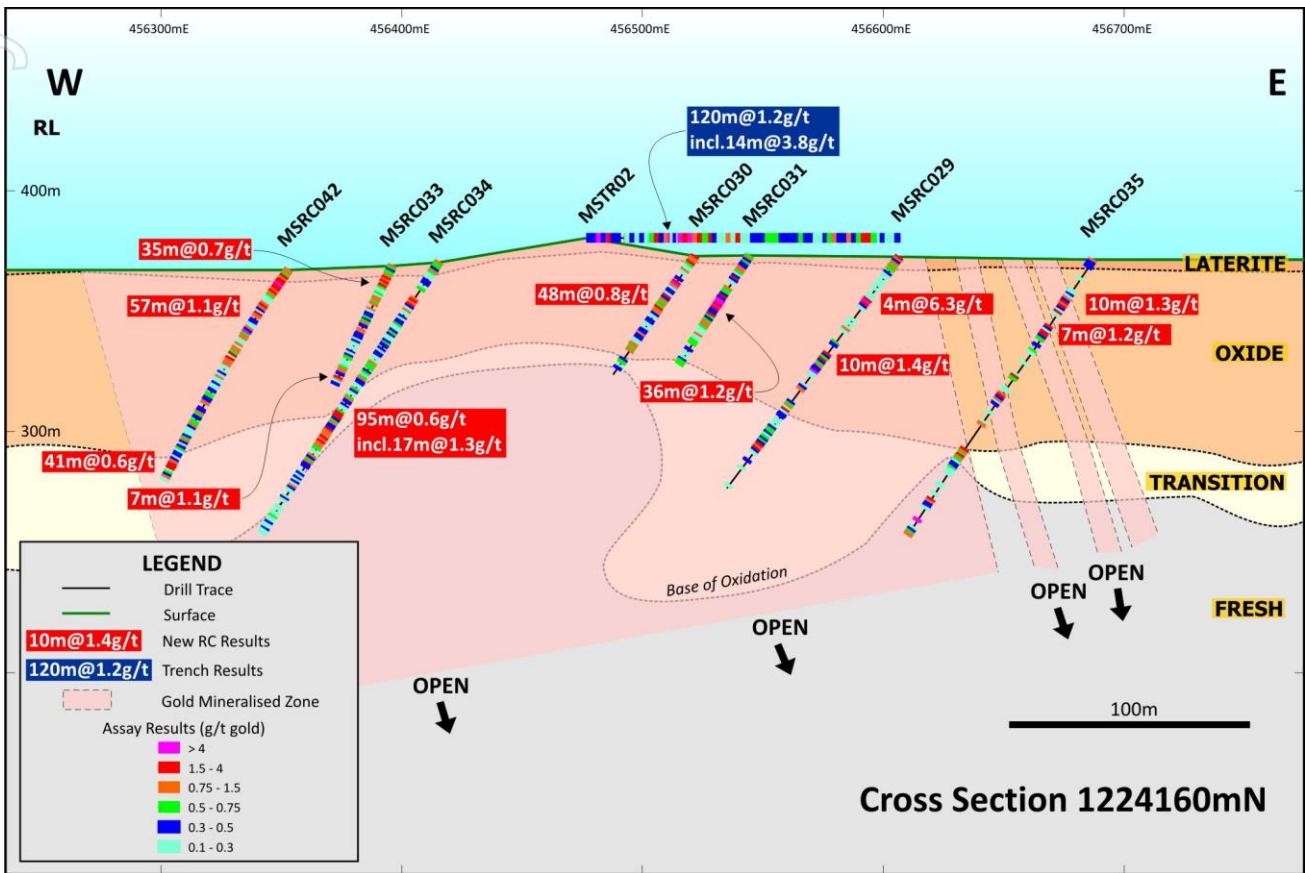


Figure 3: 1,224,160m Northing showing new drilling results

MSRC037 and MSRC038 were drilled to test the northern extension of high-grade zones discovered in 2021, and both intercepted wide zones of high-grade oxide gold mineralisation from the surface.

MSRC032, MSRC033, MSRC040 and MSRC041 were all drilled plunging to the northwest (Figure 2), to target down-dip extensions of sub-vertical, Northeast-Southwest to East-West trending gold-bearing structures encountered in MSTR07 and MSTR09. Each hole intercepted wide zones of mineralisation, including 44m @ 0.9 g/t gold from 30m in MSRC040 down-plunge of MSTR09.

**Current Progress & Next Steps**

A diamond drilling campaign is ongoing to confirm the width, grade, and structural controls on mineralisation in Bereko and Massan, providing further certainty to progress the Mineral Resource towards a higher confidence classification. First results from diamond drilling are expected late May 2023.

-ENDS-

Contact Information:

**Tim Strong**  
**Managing Director**  
 +61 3 8677 0829  
[tim@goldenrim.com.au](mailto:tim@goldenrim.com.au)



This announcement was authorised for release by the Board of Golden Rim Resources Ltd.

## ABOUT GOLDEN RIM RESOURCES

Golden Rim Resources Limited is an ASX listed exploration company with a portfolio of advanced minerals projects in Guinea and Burkina Faso, West Africa and in Chile, South America.

The Company's flagship project is the advanced Kada Gold Project in eastern Guinea. Guinea remains one of the most under-explored countries in West Africa. Golden Rim has outlined a maiden Inferred Mineral Resource Estimate of 25.5Mt at 1.1g/t gold for 930Koz<sup>3</sup>, the majority of which is shallow oxide-transitional gold mineralisation. Golden Rim is focussed on growing the Mineral Resource Estimate. Most of the 200km<sup>2</sup> project area remains under explored and there is considerable upside for the discovery of additional oxide gold mineralisation.

The Company has outlined an Indicated and Inferred Mineral Resource of 50Mt at 1.3g/t gold for 2Moz<sup>4</sup> at the Kouri Gold Project, located in north-east Burkina Faso, and it also holds the Paguanta Copper and Silver-Lead-Zinc Project in northern Chile which has a Measured, Indicated and Inferred Mineral Resource of 2.4Mt at 88g/t silver, 5.0% zinc and 1.4% lead for 6.8Moz silver, 265Mlb zinc and 74Mlb lead<sup>5</sup> at the Patricia Prospect, which remains open. The Company is seeking to divest these projects to focus on Kada.

At the adjacent Loreto Copper Project in Chile, Golden Rim has signed an Option and Joint Venture agreement with Teck Chile whereby Teck Chile can acquire up to a 75% interest in the project.

**ASX:GMR**

**Market Capitalisation: A\$19.5 million**

**Shares on Issue: 591.6 million**

**T + 61 3 8677 0829 | E [info@goldenrim.com.au](mailto:info@goldenrim.com.au) | [goldenrim.com.au](http://goldenrim.com.au)**

<sup>3</sup> ASX Announcement: Kada Maiden Mineral Resource 930koz Gold dated 3 March 2022.

<sup>4</sup> ASX Announcement: Kouri Mineral Resource Increases by 43% to 2 Million ounces Gold dated 26 October 2020 (Total Mineral Resource includes: Indicated Mineral Resource of 7Mt at 1.4g/t gold and Inferred Mineral Resource of 43Mt at 1.2g/t gold).

<sup>5</sup> ASX Announcement: New Resource Estimation for Paguanta dated 30 May 2017 (Total Mineral Resource includes: Measured Mineral Resource of 0.41Mt at 5.5% zinc, 1.8% lead, 88g/t silver, 0.3g/t gold; Indicated Mineral Resource of 0.61Mt at 5.1% zinc, 1.8% lead, 120g/t silver, 0.3g/t gold; Inferred Mineral Resource of 1.3Mt at 4.8% zinc, 1.1% lead, 75g/t silver, 0.3g/t gold).

### Competent Persons Statements

The information in this report relating to previous exploration results and Mineral Resources are extracted from the announcements: Trenching at Massan returns 10m @ 10.7g/t within 128m @ 3.1g/t gold dated 12 May 2023; Golden Rim identifies new gold targets at Kada dated 11 May 2023; Maiden Drilling at Sounkou prospect hits 17m @ 1.3g/t dated 24 April 2023; Kada drilling delivers 56m @ 1.7g/t gold at Massan, 9m @ 2.8g/t gold at Bereko dated 05 April 2023; Golden Rim intercepts 9m @ 3.3gt oxide gold at Kada dated 17 March 2023; GMR hits 57m @ 1.0g/t gold in Oxide at Kada dated February 20 2023; GMR intercepts further oxide gold zones at Kada's Bereko prospect dated 06 February 2023; Golden Rim identifies extensive additional oxide gold target areas at Bereko dated 14 July 2022; Golden Rim Hits 43m at 1.2gt Gold Outside Kada Mineral Resource dated 21 June 2022; Golden Rim Commences Infill Auger Drilling at Bereko Gold Prospects dated 25 May 2022; Golden Rim hits shallow high-grade oxide gold at Bereko dated 19 May 2022; Golden Rim's Drilling Outside Kada Mineral Resource Area Delivers More Oxide Gold dated 11 May 2022; Kada Maiden Mineral Resource 930Koz Gold dated 3 March 2022; Golden Rim Discovers More Oxide Gold in Exploration Drilling at Kada dated 1 March 2022; Golden Rim hits 171.5g/t gold in sampling at Kada with multiple new targets identified dated 22 February 2022; Golden Rim Discovers Exciting New Zone of Oxide Gold at Kada – 66m at 1.0g/t Gold dated 17 February 2022; Golden Rim Hits More Oxide Gold at Kada - 61m at 1.2ppm Gold from Surface dated 28 January 2022; Golden Rim Continues to Identify Additional Gold Mineralisation at Kada dated 20 January 2022; Kada Delivers Exceptional Shallow Oxide Gold Intersection - 96m at 3.3ppm Gold dated 20 December 2021; Kada Delivers Widest Oxide Gold Intersection to Date - 62m at 1.3ppm Gold dated 14 December 2021; Golden Rim Delivers More Broad Zones of Oxide Gold at Kada dated 19 August 2021; Golden Rim Intersects 32m at 1.4ppm Gold in Oxide at Kada dated 05 August 2021; Golden Rim Expands Kada Bedrock Gold Corridor to 15km dated 30 July 2021; Golden Rim's Oxide Gold Blanket at Kada Expands to 700m Width dated 26 July 2021; Golden Rim Hits 46m at 1.3ppm Gold at Kada dated 19 July 2021; Golden Rim Continues to Outline Broad Oxide Gold Area at Kada dated 13 July 2021; Golden Rim Confirms Broad Zones of Oxide Gold in Resource Drillout at Kada dated 29 June 2021; Major Bedrock Gold Corridor Extends to 4.7km at Kada dated 20 May 2021; Major 3.5km Bedrock Gold Corridor Confirmed at Kada dated 19 April 2021. These reports are available on the Company's website ([www.goldenrim.com.au](http://www.goldenrim.com.au)). The Company confirms that it is not aware of any new information or data that materially affects the information included in these announcements and, in the case of the Mineral Resource estimate, that all material assumptions and technical parameters underpinning estimate continue to apply and have not materially changed.

The information in this report that relates to exploration results is based on information compiled by Brendan Hogan, a Competent Person, who is a Member of the Australasian Institute of Mining and Metallurgy. Mr Hogan is a full-time employee of the Company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Hogan consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

### Forward Looking Statements

Certain statements in this document are or maybe "forward-looking statements" and represent Golden Rim's intentions, projections, expectations or beliefs concerning among other things, future exploration activities. The projections, estimates and beliefs contained in such forward-looking statements necessarily involve known and unknown risks, uncertainties and other factors, many of which are beyond the control of Golden Rim, and which may cause Golden Rim's actual performance in future periods to differ materially from any express or implied estimates or projections. Nothing in this document is a promise or representation as to the future. Statements or assumptions in this document as to future matters may prove to be incorrect and differences may be material. Golden Rim does not make any representation or warranty as to the accuracy of such statements or assumptions.

**Table 1:** Collar information for holes reported.

Hole ID	Easting (m)	Northing (m)	RL (m)	Dip (o)	Azimuth (o)	EOH (m)	Status
MSRC029	456606	1224161	366	-55	270	120	Results this release
MSRC030	456523	1224160	371	-55	270	60	Results this release
MSRC031	456546	1224158	380	-55	270	54	Results this release
MSRC032	456430	1224122	375	-55	320	136	Results this release
MSRC033	456397	1224180	363	-55	320	60	Results this release
MSRC034	456418	1224157	379	-55	270	135	Results this release
MSRC035	456686	1224159	370	-55	270	138	Results this release
MSRC036	456571	1224121	384	-55	0	100	Results this release
MSRC037	456404	1224240	370	-55	270	126	Results this release
MSRC038	456348	1224338	375	-55	270	121	Results this release
MSRC039	456590	1224077	374	-55	270	150	Results this release
MSRC040	456371	1224001	390	-55	320	114	Results this release
MSRC041	456333	1224045	393	-55	320	70	Results this release
MSRC042	456353	1224160	346	-55	270	102	Results this release

## Notes:

- MS prefix denotes drilling within Massan Prospect.
- BK prefix denotes drilling within Bereko Propsect.
- NK prefix denotes drilling within Nounkoun Prospect.
- SK prefix denotes drilling within Sounkou Prospect.
- Co-ordinate projection UTM, WGS 84 zone 29 North.

**Table 2:** Significant intercepts from RC drilling

Hole ID	From (m)	To (m)	Significant Gold Intersections (≥3m x g/t or >1g/t intersection gold EOH)
MSRC029	0	9	9m @ 0.8 g/t gold
	22	26	4m @ 6.3 g/t gold Including 1m @ 21.4 g/t gold from 23m
	50	60	10m @ 1.4 g/t gold
	75	83	8m @ 0.6 g/t gold
	88	101	13m @ 0.9 g/t gold Including 3m @ 2.2 g/t gold from 97m
MSRC030	0	48	48m @ 0.8 g/t gold Including 16m @ 1.4 g/t gold from 13m
MSRC031	0	36	36m @ 1.2 g/t gold Including 7m @ 3.3 g/t gold from 20m
MSRC032	0	31	31m @ 0.6 g/t gold
	42	57	15m @ 0.7 g/t gold
	62	77	15m @ 0.6 g/t gold
	86	120	34m @ 0.9 g/t gold Including 4m @ 1.7 g/t gold from 111m
	126	136 (EOH)	10m @ 0.5 g/t gold (EOH mineralised)
MSRC033	0	35	35m @ 0.7 g/t gold
	51	58	7m @ 1.1 g/t gold
MSRC034	0	6	6m @ 0.8 g/t gold

Hole ID	From (m)	To (m)	Significant Gold Intersections (≥3m x g/t or > 1g/t intersection gold EOH)
	18	113	95m @ 0.6 g/t gold Including 17m @ 1.3 g/t gold from 75m
MSRC035	17	27	10m @ 1.3 g/t gold
	33	40	7m @ 1.2 g/t gold
	67	71	4m @ 1.4 g/t gold
	95	105	10m @ 0.8 g/t gold
	120	124	4m @ 1.4 g/t gold
	130	131	1m @ 7.0 g/t gold
	137	138 (EOH)	1m @ 1.2 g/t gold (EOH mineralised)
MSRC036	12	24	12m @ 1.3 g/t gold Including 4m @ 2.6 g/t gold from 12m
	28	33	5m @ 1.3 g/t gold
	55	59	4m @ 2.1 g/t gold
MSRC037	0	23	23m @ 1.2 g/t gold Including 7m @ 2.1 g/t gold from 0m
	32	40	8m @ 1.3 g/t gold
	44	61	17m @ 1.4 g/t gold
	64	74	9m @ 1.0 g/t gold
	77	88	11m @ 0.8 g/t gold
	97	113	16m @ 0.3 g/t gold
MSRC038	0	16	16m @ 1.2 g/t gold Including 6m @ 1.8 g/t gold from 0m
	20	25	5m @ 1.3 g/t gold
	28	47	19m @ 0.6 g/t gold
	57	64	7m @ 0.6 g/t gold
	76	83	7m @ 0.6 g/t gold
	98	114	16m @ 0.6 g/t gold
	119	120 (EOH)	1m @ 1.1 g/t gold (EOH mineralised)
MSRC039	4	18	14m @ 1.4 g/t gold Including 1m @ 12.1 g/t gold from 13m
	31	36	5m @ 3.2 g/t gold Including 2m @ 7.5 g/t gold from 33m
	42	50	8m @ 0.4 g/t gold
	78	85	7m @ 2.6 g/t gold Including 2m @ 7.5 g/t gold from 78m
	116	132	16m @ 0.6 g/t gold
	137	141	4m @ 1.1 g/t gold
	145	150 (EOH)	5m @ 2.5 g/t gold (EOH mineralised)
MSRC040	0	26	26m @ 0.5 g/t gold
	30	74	44m @ 0.9 g/t gold Including 15m @ 1.5 g/t gold from 46m
	79	82	3m @ 1.5 g/t gold
	89	96	7m @ 0.8 g/t gold
	106	116 (EOH)	8m @ 1.0 g/t gold
MSRC041	16	49	33m @ 0.6 g/t gold
	53	68	15m @ 0.5 g/t gold
MSRC042	0	57	57m @ 1.1 g/t gold



Hole ID	From (m)	To (m)	Significant Gold Intersections ( $\geq 3\text{m} \times \text{g/t}$ or $> 1\text{g/t}$ intersection gold EOH)
			Including 10m @ 2.3 g/t gold from 3m
	61	102 (EOH)	41m @ 0.6 g/t gold (EOH mineralised) Including 3m @ 2.5 g/t gold from 95m

## Notes:

- Intercept cut-off grade is 0.3g/t gold.
- Intervals are reported no more than 3m of continuous internal dilution.
- Sample preparation and assaying conducted by SGS Laboratory in Ouagadougou, Burkina Faso.
- Assayed by 50g charge fire assay with Atomic Absorption Spectrometry (AAS) finish (FAA515).
- Any assays over 10,000ppb are assayed with a gravimetric assay (FAA505).
- EOH means end of hole.

## Appendix 1: JORC Code (2012 Edition), Assessment and Reporting Criteria

### Section 1: Sampling Techniques and Data

Criteria	JORC Code Explanation	Explanation
Sampling Techniques	Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.	<p>The sampling described in this report refers to reverse circulation (RC) drilling.</p> <p>Samples were all collected by qualified geologists or under geological supervision.</p> <p>The samples are judged to be representative of the rock being drilled.</p> <p>The nature and quality of sampling is carried out under QAQC procedures as per industry standards.</p> <p>RC samples are collected by a three-tier riffle splitter using downhole sampling hammers with nominal 127 to 140mm holes.</p>
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	<p>Sampling is guided by Golden Rim's protocols and Quality Control procedures as per industry standards.</p> <p>To ensure representative sampling, 1m RC samples are collected from a cyclone, passing them through a 3-tier riffle splitter (producing a 2kg sample). Duplicate samples are taken every 40<sup>th</sup> sample.</p> <p>Measures were taken to avoid wet RC drilling.</p>
	Aspects of the determination of mineralisation that are Material to the Public Report.	<p>RC drilling samples are firstly crushed using a Jaw Crusher and there after crushed to 90% passing -2mm using a RSD Boyd crusher. A less than 1kg split sample is then pulverised via LM2 to a nominal 85% passing - 75<math>\mu\text{m}</math>.</p> <p>Assayed by 50g charge fire assay with Atomic Absorption Spectrometry (AAS) finish (FAA515)</p> <p>Any assays over 10,000ppb are assayed with a gravimetric assay (FAA505).</p>

For personal use only

Criteria	JORC Code Explanation	Explanation
Drilling Techniques	Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc.).	<p>RC drilling 139.7mm rods and face-sampling bit.</p> <p>The location of each hole was recorded by handheld GPS with positional accuracy of approximately +/-5m. Location data was collected in WGS 84, UTM zone 29N.</p> <p>The majority of drill holes were planned to be drilled at -55° on azimuth 270°. This is considered an optimum angle for intersecting the primary north-south trending mineralisation. Additional holes have been drilled at -55° on azimuths 320° and 140°, to give geologists understanding of the interaction between primary north-south mineralisation and secondary ENE-WNW mineralisation, and to determine how these interactions affect grade distribution.</p> <p>Downhole surveying occurred (where-ever possible) at 30m intervals down hole.</p>
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	All RC samples are weighed to determine recoveries. Samples are recovered directly from the rig (via the cyclone and a 3-tier riffle splitter) in 1m intervals.
	Measures taken to maximise sample recovery and ensure representative nature of the samples.	<p>All RC drill samples are visually checked for recovery, moisture and contamination.</p> <p>A technician is always present at the rig to monitor and record recovery. Recoveries are recorded in the database. There are no significant sample recovery problems.</p> <p>The RC rig has an auxiliary compressor and boosters to help maintain dry samples. When wet samples are encountered, the RC drilling is discontinued.</p>
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	<p>No relationship is seen to exist between sample recovery and grade.</p> <p>No sample bias is due to preferential loss/gain of any fine/coarse material due to the acceptable sample recoveries obtained by RC drilling methods.</p>
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	<p>Logging of RC chips recorded lithology, mineralogy, mineralisation, weathering, alteration, colour and other features of the samples.</p> <p>The geological logging was done using a standardised logging system. This information and the sampling details were transferred into Golden Rim's drilling database.</p> <p>All drilling has been logged to a standard that is appropriate for the category of Resource which is being reported.</p>
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	<p>Logging is both qualitative and quantitative, depending on the field being logged.</p> <p>The drill chips were photographed in both dry and wet form.</p>

For personal use only

Criteria	JORC Code Explanation	Explanation
	The total length and percentage of the relevant intersections logged.	All holes are logged in full and to the total length of each drill hole. 100% of each relevant intersection is logged in detail.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	N/A for RC drilling
	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	RC samples were collected on the rig using a three-tier riffle splitter. Most of the samples were dry.  On the rare occasion that wet samples were encountered, they were dried prior to splitting with a riffle splitter.  The standard RC sample interval was 1m.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Samples were transported by road to SGS Laboratory in Ouagadougou, Burkina Faso.  The sample preparation for all samples follows industry best practice.  At the laboratory, all samples were weighed, dried and crushed to -2mm in a jaw crusher. A split of the crushed sample was subsequently pulverised in a ping mill to achieve a nominal particle size of 90% passing 75 µm.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	Golden Rim has protocols that cover the sample preparation at the laboratories and the collection and assessment of data to ensure that accurate steps are used in producing representative samples.  The crusher and pulveriser are flushed with barren material at the start of every batch.
	Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.	Sampling is carried out in accordance with Golden Rim's protocols as per industry best practice.  Field QC procedures involve the use of certified reference material as assay standards and blanks, as well as field duplicates. The insertion rate of these averaged 1:40.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	The sample sizes are considered appropriate to correctly represent the style of mineralisation, the thickness and consistency of the intersections.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	Assayed by 50g charge fire assay with Atomic Absorption Spectrometry (AAS) finish (FAA515)  Any assays over 10,000ppb are assayed with a gravimetric assay (FAG505).  The analytical method is considered appropriate for this mineralisation style and is of industry standard.

Criteria	JORC Code Explanation	Explanation
		The quality of the assaying and laboratory procedures are appropriate for this deposit type.
	For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	No geophysical tools were used to determine any element concentrations.
	Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.	<p>Sample preparation checks for fineness were carried out by the laboratory as part of their internal procedures to ensure the grind size of 90% passing 75 microns.</p> <p>Internal laboratory QAQC checks are reported by the laboratory.</p> <p>Review of the internal laboratory QAQC suggests the laboratory is performing within acceptable limits.</p>
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	Reported results are compiled and verified by the Company's Senior Geologist and the CEO.
	The use of twinned holes.	None of the drill holes in this report are twinned.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	<p>Primary field data is collected by Golden Rim geologists on standardised logging sheets. This data is compiled and digitally captured.</p> <p>The compiled digital data is verified and validated by the Company's database geologist.</p>
	Discuss any adjustment to assay data.	The primary data is kept on file. There were no adjustments to the assay data.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	<p>Down-hole surveys were completed at the end of every hole (where possible) using a Reflex down-hole survey tool. Measurements were taken at approximately every 30 meters.</p> <p>Collars are surveyed with a handheld GPS (+/- 5m accuracy) while drilling is ongoing, then all holes are surveyed with a DGPS, which has locational accuracy of +/- 0.1m, X, Y and Z at the completion of drilling.</p>
	Specification of the grid system used.	Location data was collected in UTM grid WGS84, zone 29 North.
	Quality and adequacy of topographic control.	Topographic control was established by using a survey base station.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	<p>Drilling of the Bereko Prospect has used 40m spacing, with line spacing varying from 50m and up.</p> <p>Drilling in the Massan Prospect was a combination of infill (to 40m x 40m), and exploration (up to 80m x 80m).</p>

Criteria	JORC Code Explanation	Explanation
	Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	Drill data spacing and distribution are sufficient to establish the geological and grade continuity appropriate for a JORC-compliant resource.
	Whether sample compositing has been applied.	There was no sample compositing.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	All drill holes reported here were drilled approximately at right angles to the strike of the target mineralisation.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	No orientation-based sampling bias has been identified in the data at this point.
Sample security	The measures taken to ensure sample security.	Samples are stored on site prior to road transport by Company personnel to the laboratory in Ouagadougou, Burkina Faso.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	RPM Global reviewed Golden Rim's sampling techniques prior to the release of a JORC-compliant resource in March 2022. Sampling was deemed to be appropriate.

## Section 2: Reporting of Exploration Results

Criteria	JORC Code explanation	Explanation
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	The reported drilling results are from the Kada permit.  Golden Rim can acquire up to a 75% interest in the Kada permit.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	Tenure is in good standing.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	The area that is presently covered by the Kada permit has undergone some previous mineral exploration.
Geology	Deposit type, geological setting and style of mineralisation.	The Kada Project covers an area of 200km <sup>2</sup> and is located in the central Siguiri Basin. It lies 36km along strike from and to the south of the 10Moz Siguiri Gold Mine operated by AngloGold Ashanti.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar elevation or RL (Reduced Level –</li> </ul>	Appropriate locality maps for some of the holes also accompanies this announcement.  Further information referring to the drill hole results can be found on Golden Rim's website



Criteria	JORC Code explanation	Explanation
	<p>elevation above sea level in metres) of the drill hole collar</p> <ul style="list-style-type: none"> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length.</li> </ul>	<p><a href="http://www.goldenrim.com.au/site/News-and-Reports/ASX-Announcements">http://www.goldenrim.com.au/site/News-and-Reports/ASX-Announcements</a></p>
	<p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>There has been no exclusion of information.</p>
Data aggregation methods	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high-grades) and cut-off grades are usually Material and should be stated.</p>	<p>All RC samples were taken at 1m intervals.</p> <p>For the 0.3 g/t gold cut-off calculations, up to 3m (down hole) of continuous internal waste.</p> <p>No weighting or high-grade cutting techniques have been applied to the data reported.</p> <p>Assay results are generally quoted rounded to 1 decimal place.</p>
	<p>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p>	<p>Any aggregation done uses a length weighted average.</p>
	<p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<p>Metal equivalent values are not reported in this announcement.</p>
Relationship between mineralisation widths and intercept lengths	<p>These relationships are particularly important in the reporting of Exploration Results.</p>	<p>The orientation of the mineralised zone has been established and the drilling was planned in such a way as to intersect mineralisation in a perpendicular manner.</p>
	<p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p>	<p>All results are listed in down-hole lengths, which structural modelling is ongoing to confirm geometry of orebody.</p>
	<p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</p>	<p>All results are listed in down-hole lengths, which structural modelling is ongoing to confirm geometry of orebody.</p>
Diagrams	<p>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</p>	<p>Maps are provided in the main text.</p>

For personal use only

Criteria	JORC Code explanation	Explanation
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high-grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	The accompanying document is considered to represent a balanced report.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	There is no other exploration data which is considered material to the results reported in the announcement.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).	Further exploration and infill drilling is currently ongoing, and will continue to target the Bereko Prospect and the northern extension of the Massan MRE area.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Refer to main body of this report.