

13 October 2023

## Fields Find Exploration Update

### HIGHLIGHTS:

- Phase 1 drilling of base metal and gold targets at Fields Find West completed; 17 RC holes drilled for 4,672m, with receipt of assays expected in 4-6 weeks.
- Next phase of exploration and drilling at Fields Find West is scheduled to commence in early November and continue into CY2024; testing a further 4-7 prospective areas, covering both base metal and gold targets.
- The rig is also scheduled to return to the Rothschild gold deposit (eastern Fields Find Project) to target further extensions of the Main Lode (at depth and along strike), as well as test the potential for northern and southern lodes.
- Updated Rothschild Mineral Resource estimate expected in Q1 CY2024, following completion of the next phase of drilling and integration of assay results.

---

Warriedar Resources Limited (ASX: WA8) (**Warriedar** or the **Company**) is pleased to advise that the Phase 1 drilling program at Fields Find West has been completed. Fields Find West is part of Warriedar's broader Golden Range and Fields Find Projects located in the Murchison province of Western Australia (see Figure 1).

Fields Find West is a structurally complex geological region in the western part of the Fields Find Project with at least 10 discrete target areas identified for drill testing (refer WA8 ASX release dated 3 August 2023). The area offers a strong pipeline of high-potential targets for significant base metal and gold discoveries.

The Phase 1 program commenced within the central corridor area, which represented the easiest area to drill first in terms of access, previous disturbance, status of surveys (flora/fauna, geophysical) and approved Programs of Work (**POW**) status. A total of 17 reverse circulation (**RC**) holes were completed for approximately 4,672m, targeting both key base metal and gold targets at the Warriedar Copper, Falcon, Mopoke and Sandpiper prospects (refer Figure 2). Assays from these holes are expected to be received in the next 4-6 weeks.

The next phase of drilling at Fields Find West is set to commence in early November and continue into next year, testing a further 4-7 prospective areas (refer Figure 2). Many of the targets to be drilled in the next phase are amongst the most prospective in this area. Ground geophysical surveys, supplementary soil sampling and/or flora and fauna surveys are ongoing to refine the respective targets; and POW approvals continue to be progressed.

As part of the next phase of drilling, further extensional drilling of the Rothschild gold deposit is planned (located on an existing ML in the eastern part of the Fields Find Project). Drilling at Rothschild earlier this year extended mineralisation along strike, down dip, and demonstrated the potential for multi-lode discoveries (refer WA8 ASX releases dated 12 July 2023, 29 May 2023 and 28 April 2023).

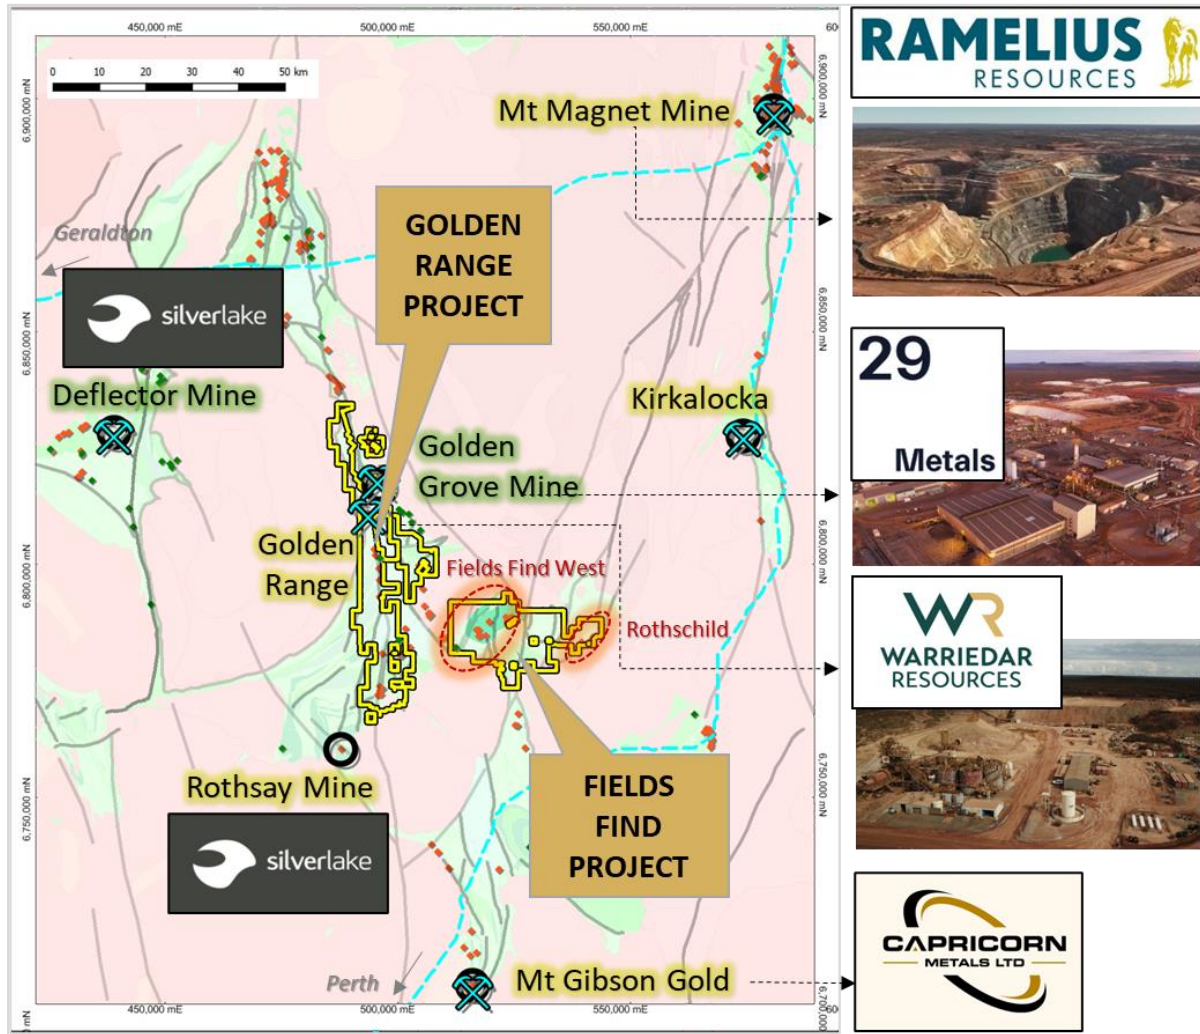


Figure 1: The location of the Golden Range and Fields Find Projects, surrounded by existing mines and development projects (large black circles). Processing plants (existing or proposed) are annotated with the cyan mining symbol.

The next stage of drilling at Rothschild is designed to test for further extensions of the Main Lode along strike and down dip, as well as step-out drilling of the interpreted northern and southern lodes (totalling approximately 2,100m).

Following completion of the next stage of drilling at Rothschild, and incorporation of assay results into geological modelling, an updated Mineral Resource estimate for this deposit is planned to be released in Q1 CY2024 (existing Mineral Resource at Rothschild is 31koz Au; refer Appendix 1 for more details). Leading geological and exploration consultant, Mining Associates Pty Ltd, have been engaged to undertake the updated Mineral Resource estimate.

For personal use only

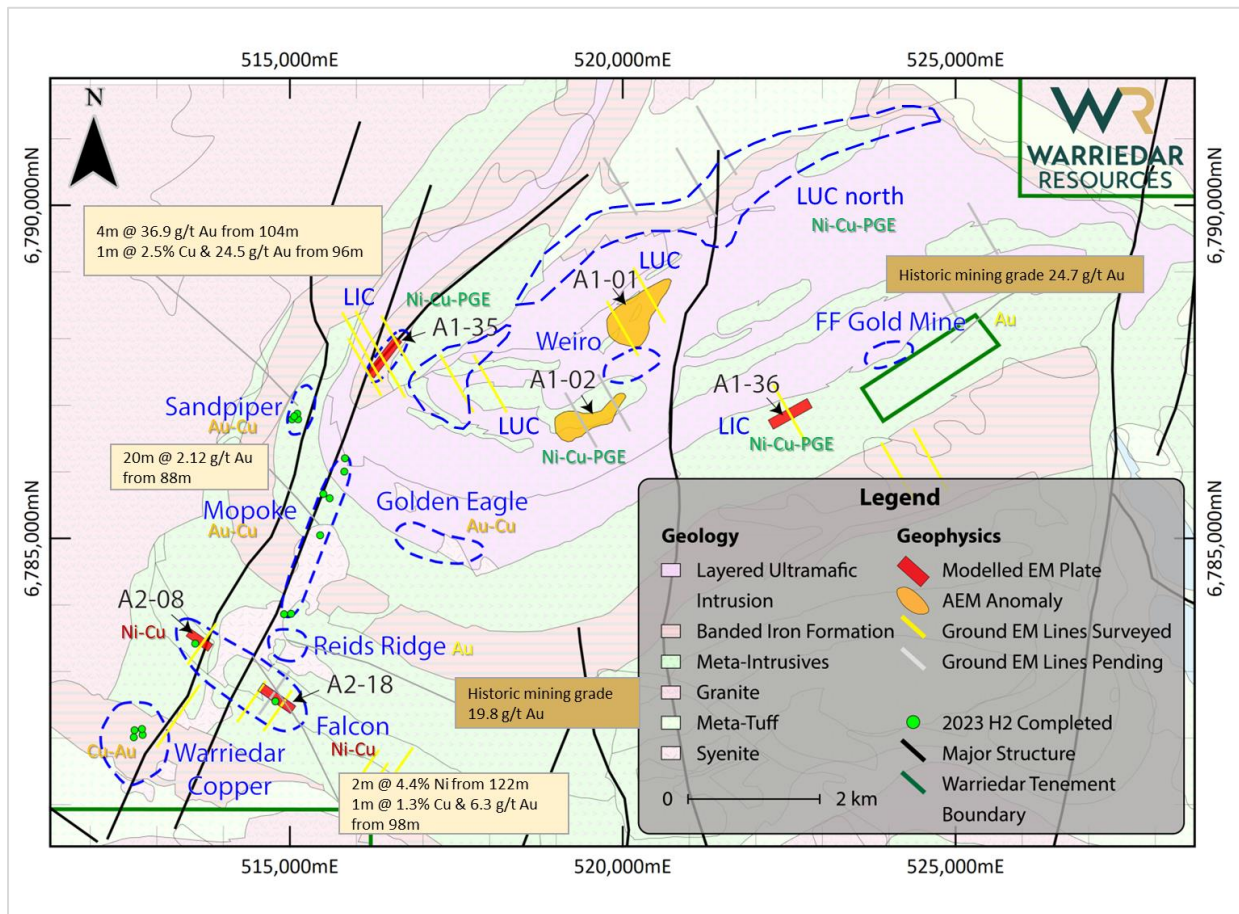


Figure 2: Fields Find West Project area. Targets drilled to date during H2 2023 (Phase 1) are Warriedar Copper, Falcon, Mopoke and Sandpiper. Drillhole collars annotated in light green. Phase 2 (commencing early November and continuing into 2024) will involve drilling at a further 4 to 7 prospects, including EM anomaly 35 and proximal to the Fields Find gold mine. Phase 3 will follow in 2024 after further groundwork, testing the remaining target areas.



Figure 3: Photo of the recent drilling at Fields Find West.

## Broader Rothschild ML exploration

### Stone Hut drilling

Results from RC drilling of the Stone Hut Prospect (refer WA8 ASX release dated 18 July 2023), located near the southern corner of the broader Rothschild ML, have demonstrated that mineralisation is relatively narrow. Of the 12 holes drilled for 2,287m (see Figure 4), the best intercept returned was 2m @ 4.02 g/t Au (refer Table 1 for collar locations and Table 2 for significant intercepts).

The results will be integrated into our targeting model for the area and help build an understanding of the controls on mineralization in this relatively underexplored area on the Rothschild Mining lease.

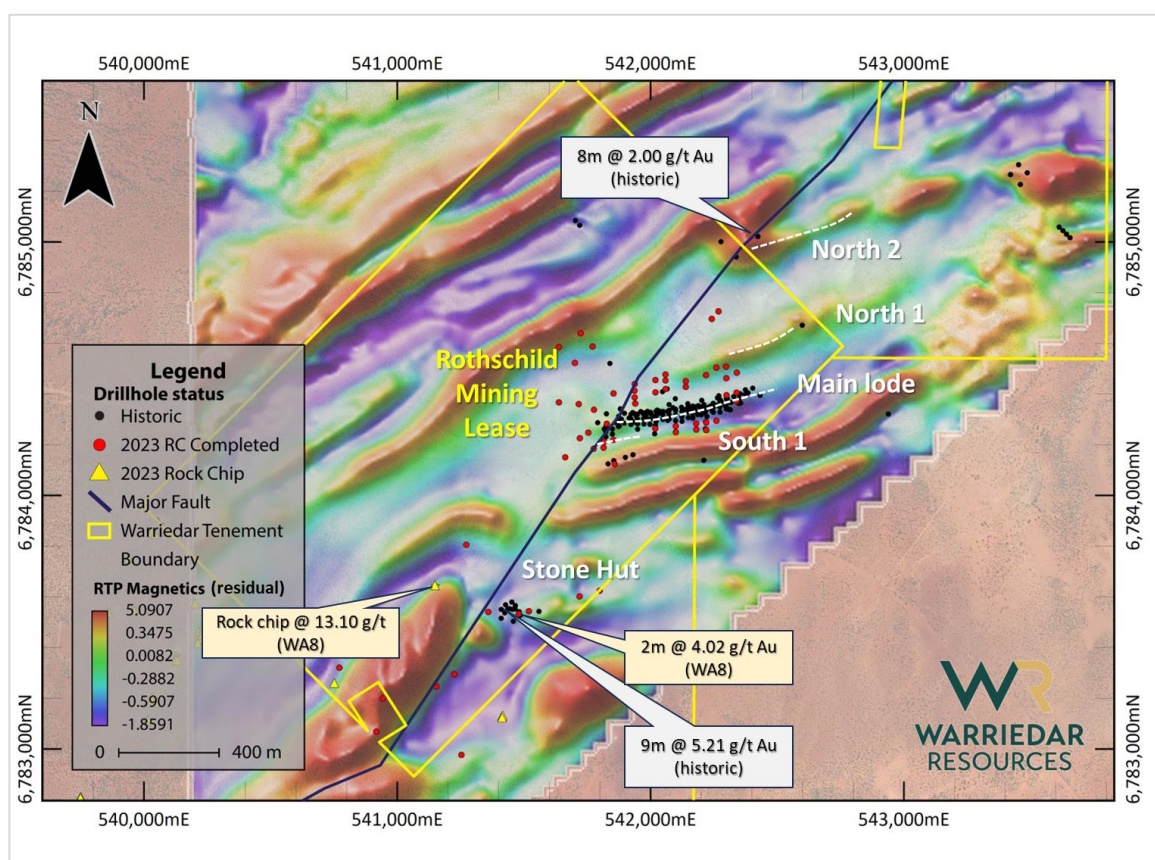


Figure 4: The Rothschild ML gold project. The locations of the interpreted parallel lodes are annotated, either side of the main lode. The Stone Hut prospect is to the southwest of the main lode, along the main fault transecting the project area. The magnetic data are shown as a backdrop, over an aerial photo.

### Field sampling

Rock chip sampling carried out over select parts of the broader Rothschild ML (see Table 3) have returned a number of exceptionally positive results, including an assay of 13.1 g/t Au located on the edge of a strongly magnetic (and structurally complex) lithological unit (see Figure 4 for sample location). The magnetic data provides an essential and objective baseline dataset to guide follow-up exploration.

These geochemical anomalies are set to be integrated into Warriedar's overarching targeting model, as the Company pursues the larger camp-scale gold play that it believes exists on the eastern side of the Fields Find Project.

**This announcement has been authorised for release by:** Amanda Buckingham, Managing Director.

**CONTACT:**

**Investors**

+61 8 9481 0389

[info@warriedarresources.com.au](mailto:info@warriedarresources.com.au)

**Media**

Michael Vaughan (Fivemark Partners)

+61 422 602 720

For personal use only

## About Warriedar

Warriedar Resources Limited (ASX: WA8) is an advanced gold and copper exploration business with an existing resource base of almost 2 Moz gold (149 koz Measured, 867 koz Indicated and 944 koz Inferred)<sup>1</sup> across Western Australia and Nevada, and a robust pipeline of high-calibre drill targets. Our focus is on rapidly building our resource inventory through modern, innovative exploration.

## Competent Person Statement

The information in this report that relates to Exploration Result is based on information compiled by Dr. Amanda Buckingham and Mr Peng Sha. Buckingham and Sha are both employees of Warriedar and members of the Australasian Institute of Mining and Metallurgy and have sufficient experience of relevance to the styles of mineralisation and types of deposits under consideration, and to the activities undertaken to qualify as Competent Persons as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Dr. Buckingham and Mr Sha consent to the inclusion in this report of the matters based on his information in the form and context in which they appear.

Table 1: Stone Hut drill collar table.

Hole ID	Hole Type	Depth	East MGA50	North MGA50	RL MGA50	Azimuth	Dip	Hole Status
SNRC001	RC	160	541720	6783601	316	5	-58	COMPLETE
SNRC002	RC	156	541800	6783624	312	4	-60	COMPLETE
SNRC003	RC	156	541520	6783543	316	5	-62	COMPLETE
SNRC004	RC	180	541480	6783532	317	283	-61	COMPLETE
SNRC005	RC	120	541360	6783540	323	1	-59	COMPLETE
SNRC006	RC	198	541226	6783294	314	305	-52	COMPLETE
SNRC007	RC	270	541155	6783246	313	302	-58	COMPLETE
SNRC008	RC	156	541254	6782976	303	323	-60	COMPLETE
SNRC009	RC	216	540918	6783068	315	314	-54	COMPLETE
SNRC010	RC	198	540944	6783199	325	312	-64	COMPLETE
SNRC011	RC	198	540772	6783320	317	124	-59	COMPLETE
SNRC012	RC	279	541273	6783805	324	146	-66	COMPLETE

Table 2 – Stone Hut drilling significant intercept table.

Hole ID	East MGA50	North MGA50	RL	From (m)	To (m)	Interval	Au g/t	Release Date
SNRC004	541480	6783532	317m	44	46	2	4.02	Current

Table 3 – Stone Hut rock chip sampling –locations and results.

Sample ID	Sample Type	East MGA50	North MGA50	Au ppm	Cu ppm	Co ppm	Li ppm	Ta ppm	Release Date
MGRX003087	Rock chips	541414	6783127	0.00	1102	3723	134	53	Current
MGRX003088	Rock chips	541416	6783131	0.00	84	20	-1	-10	Current
MGRX003089	Rock chips	541150	6783643	<b>13.10</b>	725	68	-1	-10	Current
MGRX003099	Rock chips	541414	6783123	0.00	149	5	-1	-10	Current
MGRX003204	Rock chips	541149	6783645						Pending
MGRX003205	Rock chips	540752	6783259						Pending
MGRX003204	Rock chips	541149	6783645						Pending

For personal use only

## Appendix 1: Mineral Resources

Golden Range Mineral Resources (JORC 2012) - December 2019												
Deposit	Measured			Indicated			Inferred			Total Resources		
	kt	g/t Au	kOz Au	kt	g/t Au	kOz Au	kt	g/t Au	kOz Au	kt	g/t Au	kOz Au
Austin	-	-	-	222	1.3	9.1	212	1.5	10.1	434	1.4	19.2
Baron Rothschild	-	-	-	-	-	-	693	1.4	31.3	693	1.4	31.3
M1	55	1.7	3	131	2.5	10.4	107	4.0	13.7	294	2.9	27.4
Riley	-	-	-	32	3.1	3.2	81	2.4	6.3	113	2.6	9.5
Windinne Well	16	1.9	1	636	3.5	71	322	1.9	19.8	975	2.9	91.7
Bugeye	14	1.5	0.7	658	1.2	24.5	646	1.1	22.8	1319	1.1	48.1
Monaco-Sprite	52	1.4	2.3	1481	1.2	57.7	419	1.1	14.2	1954	1.2	74
Mt Mulgine	15	2.1	1	1421	1.1	48.2	2600	1.0	80.2	4036	1.0	129.8
Mugs Luck-Keronima	68	2.3	5	295	1.6	15	350	1.6	18.5	713	1.7	38.6
Silverstone	62	3.0	6	4008	1.6	202.6	4650	1.8	267.5	8720	1.7	475.9
<b>Grand Total</b>	<b>282</b>	<b>2.2</b>	<b>19.7</b>	<b>8,887</b>	<b>1.5</b>	<b>441</b>	<b>10,080</b>	<b>1.5</b>	<b>484.5</b>	<b>19,249</b>	<b>1.5</b>	<b>945</b>

Note: Appropriate rounding applied

The information in this report that relates to estimation, depletion and reporting of the Golden Range and Fields Find Mineral Resources for is based on and fairly represents information and supporting documentation compiled by Dr Bielin Shi who is a Fellow (CP) of The Australasian Institute of Mining and Metallurgy. Dr Bielin Shi has sufficient experience relevant to the style of mineralisation and type of deposits under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Dr. Shi consents to the inclusion in the report of the matters based on the information in the form and context in which it appears.

Big Springs Mineral Resources (JORC 2012) - November 2022												
Deposit	Measured			Indicated			Inferred			TOTAL		
	kt	g/t Au	koz	kt	g/t Au	koz	kt	g/t Au	koz	kt	g/t Au	koz
North Sammy	345	6.6	73.4	698	3.1	70.6	508	2.4	39.1	1,552	3.7	183.1
North Sammy Contact				439	2.2	30.9	977	1.4	45	1,416	1.7	75.8
South Sammy	513	3.4	55.5	4,112	2.0	260.7	1,376	1.5	64.9	6,001	2.0	381.2
Beadles Creek				753	2.6	63.9	2,694	1.9	164.5	3,448	2.1	228.4
Mac Ridge							1,887	1.3	81.1	1,887	1.3	81.1
Dorsey Creek							325	1.8	18.3	325	1.8	18.3
Briens Fault							864	1.7	46.2	864	1.7	46.2
<b>Sub-Totals</b>	<b>858</b>	<b>4.7</b>	<b>128.9</b>	<b>6,002</b>	<b>2.2</b>	<b>426.1</b>	<b>8,631</b>	<b>1.7</b>	<b>459.1</b>	<b>15,491</b>	<b>2.0</b>	<b>1,014.1</b>

Note: Appropriate rounding applied

The information in the release that relates to the Estimation and Reporting of the Big Springs Mineral Resources has been compiled and reviewed by Ms Elizabeth Haren of Haren Consulting Pty Ltd who is an independent consultant to Anova Metals Ltd and is a current Member and Chartered Professional of the Australasian Institute of Mining and Metallurgy and Member of the Australian Institute of Geoscientists. Ms Haren has sufficient experience, which is relevant to the style of mineralisation and types of deposits under consideration and to the activities undertaken, to qualify as a Competent Person as defined in the 2012 Edition of the "Australasian Code of Reporting of Exploration Results, Mineral Resources and Ore Reserves (The JORC Code).



## Appendix 2

### JORC CODE (2012) TABLE 1

The table below summaries the assessment and reporting criteria used for the Golden Dragon and Fields Find projects gold deposit Mineral Resource estimate and reflects the guidelines in Table 1 of The Australasian Code for the Reporting of Exploration Results, Mineral Resources and Ore Reserves (the JORC Code, 2012).

#### Section 1 Sampling Techniques and Data (Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<p><i>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc.). These examples should not be taken as limiting the broad meaning of sampling.</i></p> <p><i>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</i></p> <p><i>Aspects of the determination of mineralisation that are Material to the Public Report.</i></p> <p><i>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverized to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</i></p>	<ul style="list-style-type: none"> <li>• WA8: For the 2023 Reverse Circulation (RC) drilling program, 1m RC drill samples are collected through a rig-mounted cone splitter designed to capture a one metre sample with optimum 3kg to 4kg sample weight. Once drilling reached fresh rock a fine spray of water was used to suppress dust and limit the loss of fines through the cyclone chimney.</li> <li>• Compositing RC samples in lengths of 4 m was undertaken from host rocks via combining 'Spear' samples of the 1.0 m intervals to generate a 2 kg (average) sample.</li> <li>• RC field duplicates were collected at a ratio of 1:50 and collected at the same time as the original sample through the chute of the cone splitter. Certified reference materials (CRM) and blanks were inserted at a ratio of 1: 25. Grade range of the certified samples were selected based on grade population and economic grade ranges.</li> <li>• Samples were sent to the lab where they were pulverised to produce a 30 g charge for fire assay.</li> <li>• Rock-chips Samples is a composite of approximately 10-20 pieces of rock collected within a 5m radius of the recorded sample point to give a total sample weight of approximately 2kg.</li> <li>• Tenements first systematically explored by Normandy Exploration in late 1980s and 1990s. Project were acquired by Gindalbie Gold N.L. in December 1999. Golden Stallion Resources Pty Ltd acquired the whole project in March 2009. Shandong Tianye purchased 51% of Minjar (the operating company) in July 2009. Minjar became the wholly owned subsidiary of Tianye in 2010. Warriedar Resources became the owner and operator of both Golden Range and Fields Find projects in Jan 2023.</li> <li>• Fields duplicates and certified standard data are presented in the database.</li> <li>• Soil and rock chip samples were taken in different times of the exploration history.</li> </ul>
<b>Drilling techniques</b>	<p><i>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc.) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether</i></p>	<ul style="list-style-type: none"> <li>• WA8: Top Drill drill rig and Challenge Drilling rig were used for the RC holes. Hole diameter was 140 mm.</li> <li>• Historically, there are 32325 drill holes in the database, among which 16827 are RC and diamond holes. Other drilling types</li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>core is oriented and if so, by what method, etc.).</i>	include AC, Auger, and RAB.
<b>Drill sample recovery</b>	<i>Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximize sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</i>	<ul style="list-style-type: none"> <li>• WA8: For each metre interval sample recovery, moisture and condition were recorded systematically. The majority of samples were of good quality with ground water having minimal effect on sample quality or recovery. There is no obvious relationship between sample recovery and grade.</li> <li>• During the RC sample collection process, the sample sizes were visually inspected to assess drill recoveries.</li> <li>• Historical exploration: It has not been possible to check sample recoveries for all the historical drill holes. However, drill recovery data were recorded for drill holes completed since 2010.</li> <li>• Minjar's database shows that the majority of samples were of good quality with ground water having minimal effect on sample quality or recovery.</li> </ul>
<b>Logging</b>	<i>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc.) photography. The total length and percentage of the relevant intersections logged.</i>	<ul style="list-style-type: none"> <li>• WA8: RC chips were washed and stored in chip trays in 1 m intervals for the entire length of each hole. Chip trays were stored on site in a sealed container. Chips were visually inspected and logged by an onsite geologist to record lithology, alteration, mineralisation, veining, structure, sample quality etc. Mineralisation, veining, and minerals were quantitative or semi quantitative in nature. The remaining logging was qualitative.</li> <li>• Drill hole logs are recorded in LogChief and uploaded into database (DataShed), and output further validated in 3D software such as Surpac and Micromine. Corrections were then re-submitted to database manager and uploaded to DataShed.</li> <li>• Historical exploration: Detailed geology logs exist for most of the holes in the database.</li> <li>• Logging is both qualitative and quantitative or semi quantitative in nature.</li> <li>• Diamond drill holes were logged by site geologists for the entire length of each core. Core trays were photographed wet and dry prior to sampling.</li> <li>• A geological description of the rock chips sample was recorded.</li> </ul>
<b>Sub-sampling Techniques and sample preparation</b>	<i>If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc. and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are</i>	<ul style="list-style-type: none"> <li>• WA8: RC samples were split from dry 1 m bulk samples via a splitter directly from the cyclone to obtain a sample mass of 2-3kg. Field duplicates were collected at a ratio of 1:50 and collected at the same time as the original sample through the cone splitter. CRMs and blanks were inserted at a ratio of 1:25.</li> <li>• Samples including RC and rock chips were sorted and dried at 105 °C in client packaging or trays.</li> <li>• All samples weighed and recorded when sample sorting.</li> <li>• Pulverize 3kg to nom 85% &lt;75um All samples were analysed for Au using fire assay.</li> <li>• Sample preparation technique is appropriate for Golden Range and Fields Find projects and is standard industry practice for gold deposits.</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>appropriate to the grain size of the material being sampled.</i></p>	<ul style="list-style-type: none"> <li>• Historical exploration: Core is half and/or quarter cut using an automatic core saw to achieve a representative sample for laboratory submission.</li> <li>• The sample preparation technique is considered industry best standard practice.</li> <li>• RC samples were generally dried and split at the rig using a riffle splitter. Large samples weighing between 3 and 5 kg each were dried, crushed and pulverized using industry best practice at the time.</li> <li>• Soil samples were about 500 grams for each, and organic materials were sieved out.</li> </ul>
<p><b>Quality of assay data and Laboratory tests</b></p>	<p><i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc., the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established.</i></p>	<ul style="list-style-type: none"> <li>• WA8: Drilling samples were submitted to Jinning Testing &amp; Inspection's Perth laboratory. RC samples were assayed by 30 gm fire assay. Field duplicates and CRM samples were selected and placed into sample stream analysed using the same methods.</li> <li>• In addition, most of samples were analysed for multi elements with 4 acid digest and ICP finish. No portable XRF analyses have been done on any samples.</li> <li>• Historical exploration: Drill samples were submitted to labs in Perth such as ALS, SGS, Kalassay, Genalysis, and Jinning Testing &amp; Inspection. All samples were analysed by various industry standard fire assay methods. Most of these individual methods are recorded in the database.</li> <li>• RC Field duplicates and CRM's were collected and inserted at a rate of 1:20. The grade ranges of the CRM's were selected based on anticipated grade populations, material composition and oxidation state.</li> <li>• No portable XRF results were used to determine any elemental concentrations in Minjar's database.</li> </ul>
<p><b>Verification of sampling and assaying</b></p>	<p><i>The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.</i></p>	<ul style="list-style-type: none"> <li>• WA8: Logging and sampling were recorded on print logging sheet, digital logging sheet and sample book. Information was imported into DataShed database after data validation. File validation was also completed by geologist on the rig. Datashed was also applied for data verification and administration.</li> <li>• Assay results received were plotted on section and were verified against neighbouring holes. QAQC data were monitored on a hole-by-hole basis.</li> <li>• Any failure in company QAQC protocols resulted in follow up with the lab and occasional repeat of assay as necessary.</li> <li>• Rock chips location and sample description data were collected in the field. Assay results were merged with the field data based on sample number</li> <li>• Historical exploration: Independent consultant reports have been viewed that verify significant historic interactions. Visual inspections have been completed with original and close grade control RC holes and results are comparable.</li> </ul>

For personal use only

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>• Primary data was sourced from an existing digital database and compiled into an industry standard drill hole database management software (DataShed). Records have been made of all updates that have been made in cases of erroneous data. Data verification has been ongoing with historical assay and survey being checked.</li> <li>• Some of Minjar drill holes were infill and grade control holes nearby historical holes and produced comparable results.</li> <li>• No adjustments have been made to the assay data other than length weighted averaging.</li> </ul>
<p><b>Location of data points</b></p>	<p><i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></p> <p><i>Specification of the grid system used.</i></p> <p><i>Quality and adequacy of topographic control.</i></p>	<ul style="list-style-type: none"> <li>• WA8: RC hole collar positions and the rock chips sample point were surveyed using handheld GPS. All location data are captured in the MGA projection coordinates on GDA94 geodetic datum. Selected holes will be picked-up by a licenced surveyor using DGPS equipment.</li> <li>• During drilling most holes underwent gyroscopic down hole surveys on 30m increments. Upon completion of the hole a continuous gyroscopic survey with readings taken automatically at 5m increments inbound and outbound. Each survey was carefully checked to be in bounds of acceptable tolerance.</li> <li>• Historical exploration: Collar survey has been used from the supplied database. All holes have been checked spatially in 3D.</li> <li>• All historical drill holes drilled since 2010 were staked using total station DGPS by a professional surveyor.</li> <li>• The topo surface files were sourced from the mine closure site survey results by professional surveyors.</li> <li>• Drilling contractor shall supply a digital camera capable of single shot down hole surveys, which will be undertaken for every 30 meters, and a gyro tool capable of surveys at 10 meters interval down/up hole at completion of the hole.</li> </ul>
<p><b>Data spacing and distribution</b></p>	<p><i>Data spacing for reporting of Exploration Results.</i></p> <p><i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></p> <p><i>Whether sample compositing has been applied.</i></p>	<ul style="list-style-type: none"> <li>• WA8: Samples from RC drilling were collected and recorded for each meter down the hole.</li> <li>• In combination with historical drill holes, spacing varied between 25 meters to 100 meters.</li> <li>• Some of the holes drilled within this program may be of suitable data spacing for use in a resource estimation.</li> <li>• Historical exploration: Grade control drilling were conducted for historical open pit mining activities.</li> <li>• Drill hole spacing varies from different projects. Spacing of 20 m by 20 m will be classified as indicated, measured resources with drill hole spacing less than 10m.</li> <li>• Various soil sampling data with different spacing. It varies from 50 meters up to 200 meters.</li> </ul>
<p><b>Orientation of data in relation to</b></p>	<p><i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is</i></p>	<ul style="list-style-type: none"> <li>• WA8: Drill lines are orientated across strike on an MGA grid. Windinne Well and Rothschild ore bodies dip at about vertical. The rest of targets and deposits controlled by Mougooderra</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>geological structure</b>	<i>known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	<p>Shear is generally moderate to steeply west-dipping.</p> <ul style="list-style-type: none"> <li>Holes in the program have been drilled at inclination of about -60 degrees. Orientation of the drilling is suitable for the mineralisation style and orientation of the gold mineralisation.</li> <li>Historical exploration: The drilling was orientated perpendicular to the perceived strike of the mineralised structures, with holes drilled dominantly toward east. Inclined holes with the angle in the range of -45 degrees and -90 degrees are considered to be appropriate to the dip of the mineralised structure creating minimal sampling bias.</li> <li>Shallow AC, RAB and Auger holes were drilled as vertical holes.</li> </ul>
<b>Sample security</b>	<i>The measures taken to ensure sample security.</i>	<ul style="list-style-type: none"> <li>WA8: Calico sample bags are tied, grouped by sample ID placed into polyweave sacks and cable tied. These sacks were then appropriately grouped, placed within larger in labelled bulka bags for ease of transport by company personnel, and dispatched by third party transport contractor. Each dispatch was itemised and emailed to laboratory for reconciliation upon arrival.</li> <li>Historical exploration: For samples collected since 2010, all the procedures were following industry standard.</li> <li>Calico samples are sealed into green or polyweave bags and cable tied. These are then sealed on a pallet and transported to the laboratory in Perth by company staff or contractors or established freight companies.</li> <li>All historical drill cores and RC chips were stored on Golden Dragon mine site core yard. Company geologists have checked and compared with the digital drill hole data base.</li> </ul>
<b>Audits or reviews</b>	<i>The results of any audits or reviews of sampling techniques and data.</i>	<ul style="list-style-type: none"> <li>WA8: the competent person for exploration results has visited the project where sampling has taken place and has reviewed and confirmed the sampling procedures.</li> <li>Historical exploration: All information were initially processed and interpreted by a qualified person.</li> <li>Geologist checked of historical assays with favourable comparisons.</li> </ul>

## Section 2 Reporting of Exploration Results (Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to</i>	<ul style="list-style-type: none"> <li>There are 70 tenements associated with both Golden Dragon and Fields Find. Among them, 22 are mining leases, 29 are in exploration licenses and 3 are in prospecting licenses. The rest of the tenements are G and L licenses. Total tenement size is 813 km<sup>2</sup>. Third party rights include: 1) the JV with Mid-west Tungsten Pty Ltd at the Mt Mulgine project; 2) Gindalbie iron ore rights; 3) Mt</li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>operate in the area.</i>	<p>Gibson Iron ore right for the Shine project; 4) Messenger's Patch JV right on M 59/357 and E 59/852; 5) Mt Gibson's iron ore and non-metalliferous dimension stone right on Fields Find; 6) GoldEX Royalty to Anketell Pty Ltd for 0.75% of gold and other metals production from M 59/379 and M 59/380; 7) 2% NSR royalty on products produced from Fields Find tenements to Mt Gibson; 8) Royalty of A\$5 per oz of gold produced payable to Mr Gary Mason, limited to 50Koz produced from P 59/1343, which covers part of E 59/1268. 9) Minjar royalty for A\$ 20 per oz of gold production from the project subject to a minimum received gold price of A\$2000 per oz with a cap of A\$18 million.</p> <ul style="list-style-type: none"> <li>• There is no determined native title in place.</li> </ul>
<b>Exploration done by other parties</b>	<i>Acknowledgment and appraisal of exploration by other parties.</i>	<ul style="list-style-type: none"> <li>• Gold exploration at the region commenced in the 1980s. Normandy Exploration commenced the systematic exploration in late 1980s and 1990s. Project were acquired by Gindalbie Gold N.L. in December 1999. Golden Stallion Resources Pty Ltd acquired the whole project in March 2009. Shandong Tianye purchased 51% of Minjar (the operating company) in July 2009. Minjar became the wholly owned subsidiary of Tianye in 2010.</li> <li>• Over 30,000 drill holes are in the database and completed by multiple companies using a combination technic of Reserve Circulation (RC), diamond drilling (DD), airecore (AC), Auger and RAB. Most of the drill holes were completed during the period of 2001-2004 and 2013-2018 by Gindalbie and Minjar respectively.</li> </ul>
<b>Geology</b>	<i>Deposit type, geological setting and style of mineralisation.</i>	<ul style="list-style-type: none"> <li>• In the Golden Range area, gold mineralisation is dominantly controlled by structures and lithologies. North-northeast trending shear zones and secondary structures are interpreted to be responsible for the hydrothermal activity that produced many of the region's gold deposits. Two major shear structures have been identified, the Mougooderra Shear Zone and the Chulaar Shear Zone; both striking approximately north and controlling the occurrence of gold deposits. Host lithology units for gold mineralisation are predominantly the intensely altered mafic to ultramafic units, BIF, and dolerite intrusions. Gold mineralisation hosted by porphyries has been discovered as well, from the most recent drilling programs at Sandpiper and Reids Ridge. Main mechanism for mineralisation is believed to be associated with: 1) Shear zones as a regional control for fluid; 2) dolerite intrusions to be reacted and mineralized with auriferous fluids; 3) BIF as a rheological and chemical control; 4) porphyry intrusions associated with secondary or tertiary brittle structures to host mineralisation.</li> </ul>

For personal use only

Criteria	JORC Code explanation	Commentary
		<ul style="list-style-type: none"> <li>The Fields Find project is contiguous with the Warriedar project, which, in combination; covers the entire Warriedar greenstone belt. Regional metamorphic grades are generally considered to be lower than amphibolite facies. Similar to Golden Dragon, gold deposits are structurally controlled, and occur in the settings of: 1) contact zones between mafic and ultramafic units; 2) hosted by BIF; 3) hosted by dolerite and porphyry intrusions.</li> </ul>
<b>Drill hole Information</b>	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <p>easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length.</p> <p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<ul style="list-style-type: none"> <li>Table 1 and Table 2 of this release provides details of drill hole coordinates, orientations and length for all drill holes, and significant intercept.</li> </ul>
<b>Data aggregation methods</b>	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p> <p>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</p> <p>The assumptions used for any reporting of metal equivalent values should be clearly stated.</p>	<ul style="list-style-type: none"> <li>Reported intercepts include a minimum of 0.5g/t Au value over a minimum length of 1 m with a maximum 2 m length of consecutive interval waste.</li> <li>No upper cuts have been applied. No aggregation methods have been applied for the rock chips. No upper cuts have been applied.</li> <li>No metal equivalent values were reported.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<p>These relationships are particularly important in the reporting of Exploration Results.</p> <p>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</p> <p>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</p>	<ul style="list-style-type: none"> <li>Gold mineralisation at Rothschild deposit and Stone Hut prospect are about vertical. Drill holes are variable orientated with dipping angles between -50 to -70 degree.</li> <li>Majority of the historical drill holes were drilled as inclined holes with dipping angles close to -60 degree from multiple orientations; most of the drill holes are toward south at Rothschild and drilled toward to southeast at Stone Hut prospect. This is considered to be appropriate for the interpreted dip of the major mineralised structure and creating minimal sampling bias.</li> <li>Historical shallow AC, RAB, and Auger holes were drilled as vertical. Historical RC and diamond holes were drilled from multiple orientations.</li> </ul>
<b>Diagrams</b>	<p>Appropriate maps and sections (with scales) and tabulations of intercepts</p>	<ul style="list-style-type: none"> <li>Appropriate maps are included in the announcement</li> </ul>

Criteria	JORC Code explanation	Commentary
	<i>should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</i>	
<b>Balanced reporting</b>	<i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i>	<ul style="list-style-type: none"> <li>The accompanying document is considered to be a balanced report with a suitable cautionary note.</li> </ul>
<b>Other substantive exploration data</b>	<i>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</i>	
<b>Further work</b>	<i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i>	<ul style="list-style-type: none"> <li>Further work includes RC and diamond core drilling programs to extend the identified mineralisation along strike and toward depth.</li> <li>Repeated parallel ore bodies toward will be tested as well.</li> <li>QAQC assessment, geotechnical assessment and bulk density test work needs to be conducted at selected deposits and targets.</li> </ul>

For personal use only