

## ASX Announcement | ASX: TNC

29 November 2023

### TNC intersects 69.95m @ 1.91% Cu and 16.75m @ 5.30% Cu at Vero Resource, Mt Oxide

True North Copper Limited (ASX:TNC) (True North, TNC or the Company) is pleased to report exceptional assay results from drillhole MOXD226A, the final drillhole of its successful initial Vero Resource drilling program. The Vero Resource is part of TNC's 100% owned Mt Oxide Project (located 140km north of Mount Isa, Queensland, see Figure 1).

#### HIGHLIGHTS

- MOXD226A has returned three key zones of strong mineralisation including a broad interval of 69.95m and further intervals of up to 11.19% Cu. Highlights include:
  - 69.95m (42.85m\*) @ 1.91% Cu, 17.7g/t Ag and 675 ppm Co from 224.55m
    - Inc. 9.65m (5.89m\*) @ 2.74% Cu, 24.1g/t Ag and 993 ppm Co from 239.50m
    - Inc. 18.15m (11.07m\*) @ 3.23% Cu, 26.8g/t Ag and 585 ppm Co from 276.35m
  - 16.75m (16.75m\*) @ 5.30% Cu, 44.0g/t Ag and 120 ppm Co from 165.25m
    - Inc. 4.65m (4.65m\*) @ 11.19% Cu, 93.9g/t Ag and 136 ppm Co from 172.55m
  - 16.60m (11.17m\*) @ 2.11% Cu, 18.9g/t Ag and 468 ppm Co from 342.00m
    - Inc. 6.30m (4.22m\*) @ 4.50% Cu, 33.7g/t Ag and 141 ppm Co from 343.05m
- These follow previous results including MOXD217 returning 66.5m @ 4.95% Cu<sup>1</sup>; MOXD225 returning two intersects of 26.20m @ 4.45% Cu and 46.60m @ 2.18% Cu<sup>2</sup>; MOXD221 returning 42.10m @ 1.66% Cu (inc. 4.00m @ 7.65% Cu)<sup>3</sup>.
- Results further confirm the Vero Resource hosts a large-scale, copper-cobalt-silver system with multiple wide high-grade Cu-Co steeply dipping shoots and lenses.
- TNC expects to announce a re-estimated Vero Resource in Q1 2024 with 3D geological interpretation, metallurgical sampling, and test program design underway.

#### COMMENT

True North Copper Managing Director, Marty Costello said:

*We're incredibly excited to share these exceptional assay results from the final drillhole of our initial Vero Resource drilling program. The Vero drilling program has delivered phenomenal intersections across multiple drillholes reaffirming the significant potential of the resource. From the first drillhole MOXD217 returning 66.5m @ 4.95% Cu to this final drillhole MOXD226A hitting up to 11.19% Cu and revealing three broad mineralisation zones including 69.95m @ 1.91% Cu and 16.75m @ 5.30% Cu, this program has been a major success.*

*Confirmation of the Vero Resource's outstanding mineralisation places us in a very confident position as we work to re-estimate the Vero Resource. We look forward to announcing the re-estimated resource in early 2024.*

*This final suite of Vero assay results will feed into our current geological modelling and ongoing mining studies. Metallurgical sampling and test program design is also continuing across the Mt Oxide Project. We are committed to maximising the Vero Resource and remain steadfast in unlocking the entirety of the Mt Oxide Project's highly prospective potential.*

\*= Estimated True Width

For personal use only

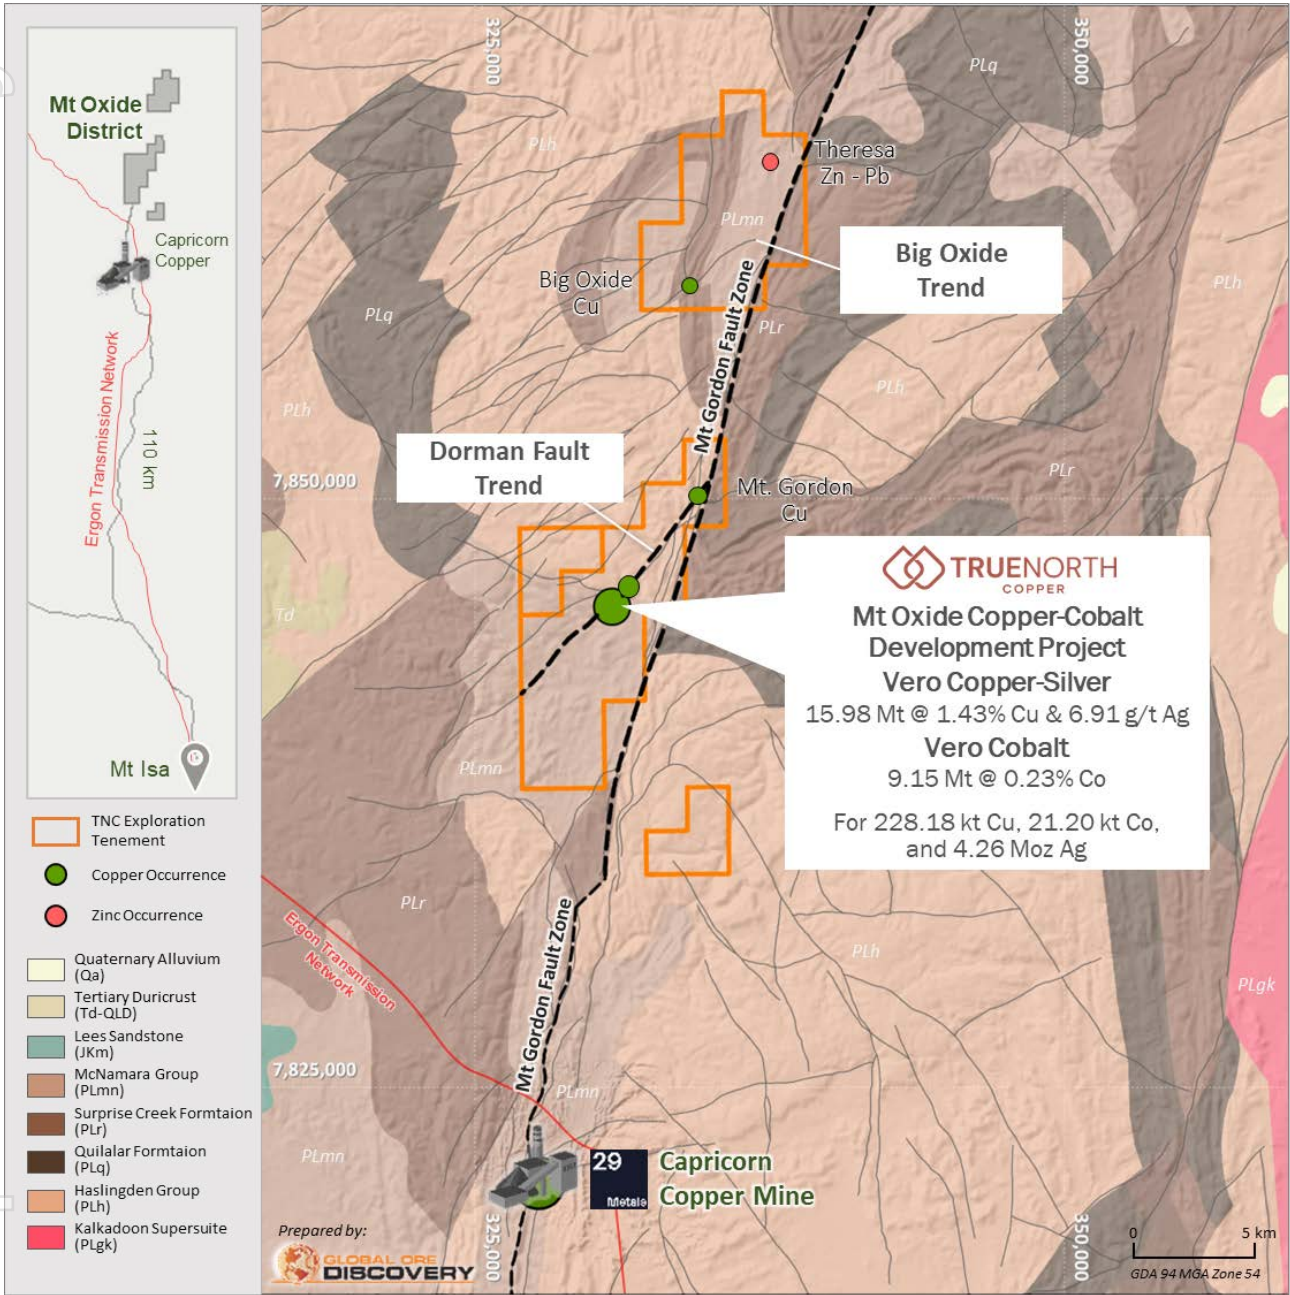


Figure 1. Location and regional geological framework Mt Oxide Project which hosts the Vero Copper-Silver-Cobalt Resource<sup>5</sup>



## SUMMARY OF DRILL INTERSECTIONS

### Drillhole MOXD226A – Final drillhole of the 2023 Vero Resource drilling program

**PLEASE NOTE - [\*= estimated true width]**

MOXD226A was drilled in September 2023 (Figure 3) with the aim of extending the steeply dipping, high grade, breccia style mineralisation down dip and along strike as well as infilling the shallowly dipping stratiform replacement and stockwork vein style mineralisation at the Vero Copper-Silver-Cobalt Deposit (15.98 Mt at 1.43% Cu and 6.91 g/t Ag total combined Measured, Indicated, and Inferred resource and a separate 9.15 Mt at 0.23% Co total combined Measured, Indicated, and Inferred resource)<sup>5</sup>.

MOXD226A targeted 25m south of MOXD217 (66.50m (48.00m\*) @ 4.95% Cu, 32.7 g/t Ag and 685 ppm Co from 234.00m<sup>1</sup>, and 30m down dip of historic hole S200 drilled by Gunpowder Copper in the late 1960's early 1970's. TNC previously reported exceptional visual copper mineralisation from MOXD226A<sup>4</sup>.

Assay results confirm the visual intersections contain broad zones of copper-silver-cobalt mineralisation including (Table 1, Table 2, Figure 2, Figure 3 & Figure 4):

- 69.95m (42.85m\*) @ 1.91% Cu, 17.7g/t Ag and 675 ppm Co from 224.55m
  - Inc. 9.65m (5.89m\*) @ 2.74% Cu, 24.1g/t Ag and 993 ppm Co from 239.50m
  - Inc. 18.15m (11.07m\*) @ 3.23% Cu, 26.8g/t Ag and 585 ppm Co from 276.35m
- 16.75m (16.75m\*) @ 5.30% Cu, 44.0g/t Ag and 120 ppm Co from 165.25m
  - Inc. 4.65m (4.65m\*) @ 11.19% Cu, 93.9g/t Ag and 136 ppm Co from 172.55m
- 16.60m (11.17m\*) @ 2.11% Cu, 18.9g/t Ag and 468 ppm Co from 342.00m
  - Inc. 6.30m (4.22m\*) @ 4.50% Cu, 33.7g/t Ag and 141 ppm Co from 343.05m

The 69.95m (42.85m\*) @ 1.91% Cu, 17.7g/t Ag and 675 ppm Co from 224.55m intersection (Figure 2, Figure 3 & Figure 4) consists of crackle brecciation, vein breccias and disseminated copper mineralisation interpreted to correlate with high grade intercepts in other TNC drilling including:

- MOXD217 - 66.50m (48.00m\*) @ 4.95% Cu, 32.7 g/t Ag and 685 ppm Co from 234.00m<sup>1</sup> approximately 25m to the north.
- MOXD225 - 26.20m (16.48m\*) @ 4.45% Cu, 42.9g/t Ag and 1,964 ppm Co from 258.80m<sup>2</sup> approximately 40m to the north.
- MOXD221 - 36.10m (20.10m\*) @ 1.23% Cu, 15.7g/t Ag and 1,952 ppm Co from 266.90m<sup>3</sup> approximately 110m to the north.

TNC's new intersections, when combined with historic intersections, now define a steep high-grade lens with overall dimensions of 140m long, 100m high and 25-40m thick with approximately 25m drill centres. It is considered likely that the grade and confidence of this lens have been improved by TNC's drilling.

The deeper intersection in MOXD226A 16.60m (11.17m\*) @ 2.11% Cu, 18.9g/t Ag and 468 ppm Co from 342.00m (Figure 3 & Figure 4) correlate to MOXD089 which intersected 31.00m downhole @ 6.2% Cu, 48.0g/t Ag, and 430ppm Co from 346m<sup>6</sup> 80m to the north of MOXD226A.

Other TNC drillhole intersections that correlate to this lens of mineralisation include:

- MOXD217 - 11.00m (8.19m\*) @ 3.06% Cu, 34.2g/t Ag and 682 ppm Co from 357.50m<sup>1</sup> approximately 40m to the north.
- MOXD225 - 46.60m (34.02m\*) @ 2.18% Cu, 26.3g/t Ag and 487 ppm Co from 352.50m<sup>2</sup> approximately 60m to the north.

Drilling now defines this steep high-grade lens of veinlet and vein breccia style pyrite-chalcopyrite-bornite-chalcocite mineralisation to be approximately 90m long by 40m high and 10-15m thick at 25m drillhole centres.

MOXD226A also contains a high-grade interval of shallowly dipping, chalcocite breccia mineralisation at 165.22m consisting of 16.75m (16.75m\*) @ 5.30% Cu, 44.0g/t Ag and 120 ppm Co (Figure 3 & Figure 4). This intercept was not expected based on the adjacent holes and current resource. This intercept is expected to have a positive impact on future resource estimations.

TNC's drilling program has provided the geological team with new insights into the Vero system including alteration and sulphide species zonation patterns and structural and lithological controls. This information will feed into new 3D geological models that will be used in resource estimation and exploration program design to test for extensions of the Vero resource at depth and along strike and to prioritise other Cu-Ag-Co prospects at the Mt Oxide project.

### Vero Resource development priorities

- 3D geological interpretation has commenced to feed into the future resource estimations.
- Metallurgical sampling and test program design is nearing completion, with drill core samples for test-work currently in transit to the laboratory.
- Surface geological mapping and a rock chip sampling program is in progress at other high priority targets in the immediate vicinity of the Vero Resource.

For personal use only

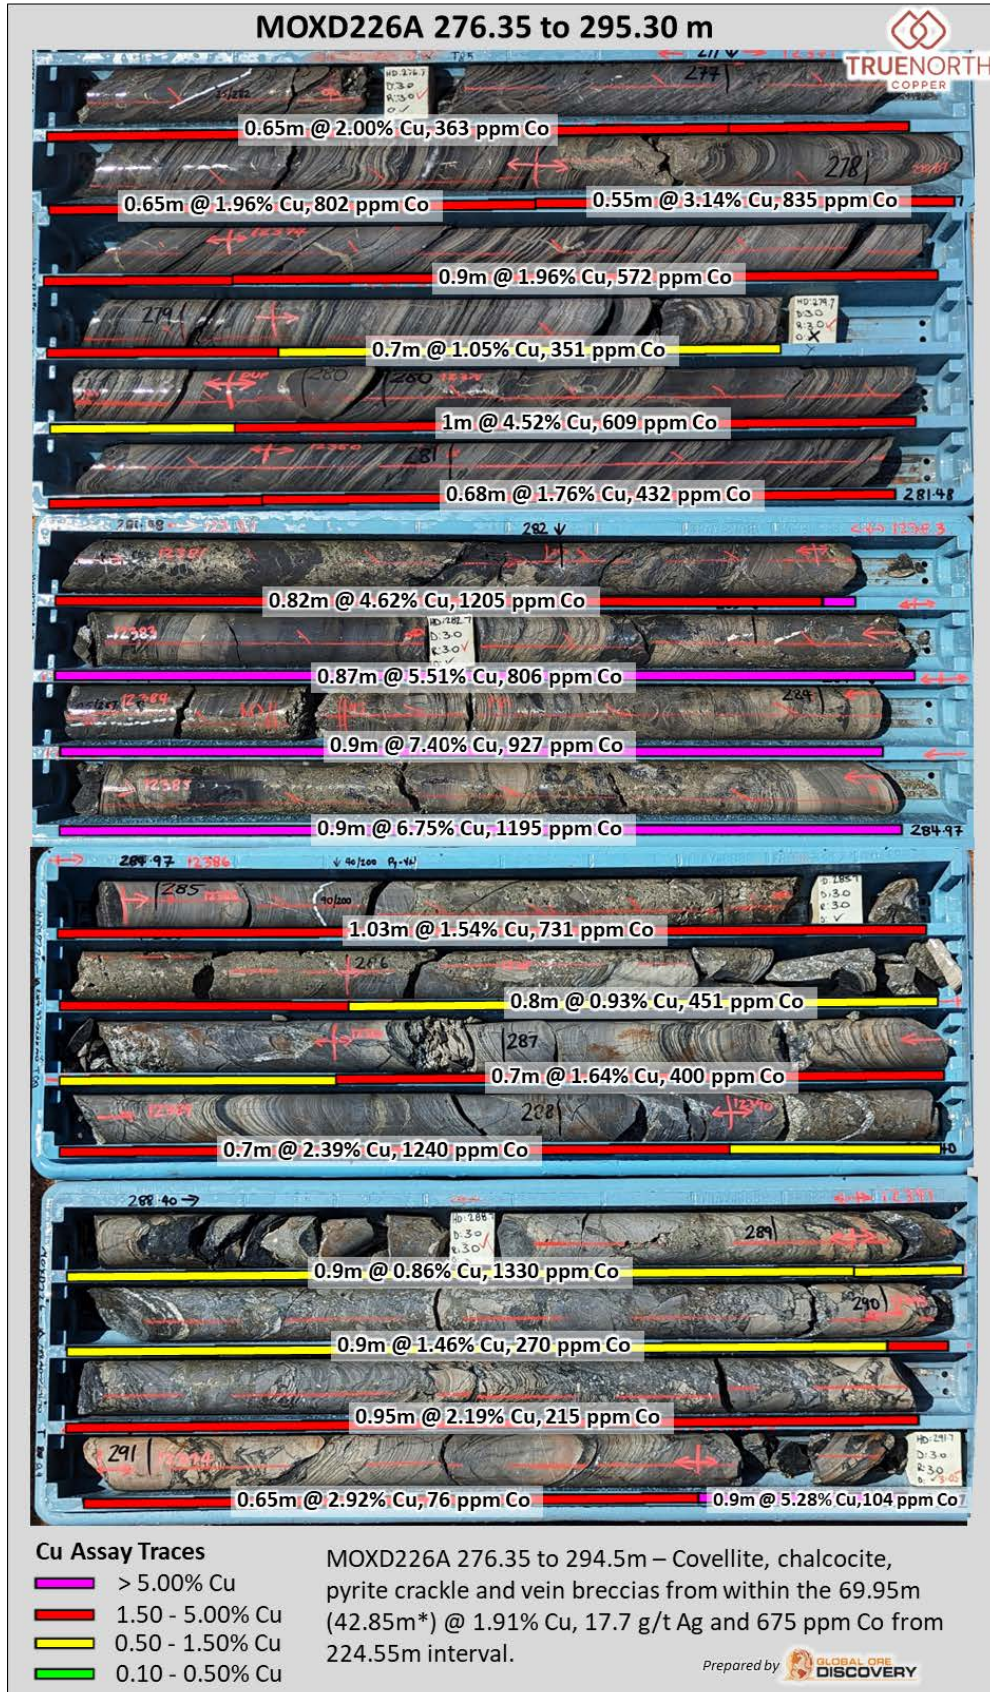


Figure 2: MOXD226A 276.35 to 294.5m – Covellite, chalcocite, pyrite crackle and vein breccias from within the 69.95m (42.85m\*) @ 1.91% Cu, 17.7 g/t Ag and 675 ppm Co from 224.55m interval.



**Table 1. Selected copper, silver, and cobalt intercepts from TNC's initial diamond drilling program at the Vero Resource.**  
 (MOXD217, 218, 219, 221, 223, 224, 225 1,2,3 previously reported). See Table 2 for complete list of intercepts.

| Hole ID     | Depth From (m) | Depth To (m) | Downhole Interval (m) | Estimated True Width ETW (m) | Cu %  | Ag g/t | Co ppm | News Release        |
|-------------|----------------|--------------|-----------------------|------------------------------|-------|--------|--------|---------------------|
| MOXD226A    | 165.25         | 182.00       | 16.75                 | 16.75                        | 5.30  | 44.0   | 120    | This Release        |
| <i>Inc.</i> | 172.55         | 177.20       | 4.65                  | 4.65                         | 11.19 | 93.9   | 136    | This Release        |
| MOXD226A    | 224.55         | 294.50       | 69.95                 | 42.85                        | 1.91  | 17.7   | 675    | This Release        |
| <i>Inc.</i> | 239.50         | 249.15       | 9.65                  | 5.89                         | 2.74  | 24.1   | 993    | This Release        |
| <i>Inc.</i> | 276.35         | 294.50       | 18.15                 | 11.07                        | 3.23  | 26.8   | 585    | This Release        |
| MOXD226A    | 342.00         | 358.60       | 16.60                 | 11.17                        | 2.11  | 18.9   | 468    | This Release        |
| <i>Inc.</i> | 343.05         | 349.35       | 6.30                  | 4.22                         | 4.50  | 33.7   | 141    | This Release        |
| MOXD217     | 234.00         | 300.50       | 66.50                 | 48.00                        | 4.95  | 32.7   | 686    | Previously Reported |
| <i>Inc.</i> | 234.60         | 255.20       | 20.60                 | 15.47                        | 10.51 | 63.5   | 1,149  | Previously Reported |
| <i>Inc.</i> | 290.15         | 298.70       | 8.55                  | 5.62                         | 6.03  | 51.6   | 98     | Previously Reported |
| MOXD217     | 357.50         | 368.50       | 11.00                 | 8.19                         | 3.06  | 34.2   | 682    | Previously Reported |
| <i>Inc.</i> | 357.50         | 361.50       | 4.00                  | 2.93                         | 6.00  | 63.7   | 544    | Previously Reported |
| MOXD217     | 172.50         | 181.05       | 8.55                  | 8.55                         | 6.16  | 45.9   | 140    | Previously Reported |
| MOXD217     | 178.25         | 181.05       | 2.80                  | 2.80                         | 14.74 | 102.5  | 54     | Previously Reported |
| MOXD218     | 355.80         | 365.00       | 9.20                  | 5.56                         | 1.22  | 10.9   | 154    | Previously Reported |
| MOXD219     | 112.00         | 128.00       | 16.00                 | 16.00                        | 1.24  | 8.0    | 183    | Previously Reported |
| <i>Inc.</i> | 112.00         | 122.00       | 10.00                 | 10.00                        | 1.27  | 8.1    | 134    | Previously Reported |
| MOXD219     | 213.10         | 236.00       | 22.90                 | 14.67                        | 1.64  | 18.5   | 2,256  | Previously Reported |
| <i>Inc.</i> | 224.45         | 230.25       | 5.80                  | 3.71                         | 2.76  | 29.5   | 3,515  | Previously Reported |
| MOXD219     | 267.50         | 282.20       | 14.70                 | 9.41                         | 2.95  | 30.2   | 1,945  | Previously Reported |
| <i>Inc.</i> | 270.30         | 282.20       | 11.90                 | 7.62                         | 3.04  | 30.2   | 2,352  | Previously Reported |
| MOXD221     | 154.90         | 197.00       | 42.10                 | 41.00                        | 1.66  | 13.5   | 1,083  | Previously Reported |
| <i>Inc.</i> | 163.40         | 171.40       | 8.00                  | 7.76                         | 2.07  | 16.7   | 1,340  | Previously Reported |
| <i>Inc.</i> | 191.20         | 195.20       | 4.00                  | 2.24                         | 7.65  | 57.3   | 1,164  | Previously Reported |
| MOXD221     | 266.90         | 303.00       | 36.10                 | 20.10                        | 1.23  | 15.7   | 1,952  | Previously Reported |
| <i>Inc.</i> | 274.40         | 280.30       | 5.90                  | 3.31                         | 2.75  | 34.2   | 2,061  | Previously Reported |
| <i>Inc.</i> | 281.30         | 286.10       | 4.80                  | 2.67                         | 2.15  | 24.9   | 2,141  | Previously Reported |
| MOXD223     | 231.25         | 235.45       | 4.20                  | 3.02                         | 2.72  | 32.4   | 173    | Previously Reported |
| MOXD223     | 364.50         | 371.00       | 6.50                  | 4.68                         | 1.40  | 13.4   | 62     | Previously Reported |
| MOXD224     | 87.40          | 93.00        | 5.60                  | 5.60                         | 0.91  | 4.6    | 588    | Previously Reported |
| MOXD225     | 159.70         | 166.50       | 6.80                  | 6.80                         | 2.32  | 12.6   | 717    | Previously Reported |
| MOXD225     | 258.80         | 285.00       | 26.20                 | 16.48                        | 4.45  | 42.9   | 1,964  | Previously Reported |
| <i>Inc.</i> | 265.50         | 276.40       | 10.90                 | 6.87                         | 7.32  | 72.2   | 2,915  | Previously Reported |
| MOXD225     | 320.80         | 327.90       | 7.10                  | 5.00                         | 2.19  | 27.1   | 253    | Previously Reported |
| MOXD225     | 352.50         | 399.10       | 46.60                 | 34.02                        | 2.18  | 26.3   | 487    | Previously Reported |
| <i>Inc.</i> | 352.50         | 356.70       | 4.20                  | 3.07                         | 11.15 | 129.5  | 135    | Previously Reported |

For personal use only


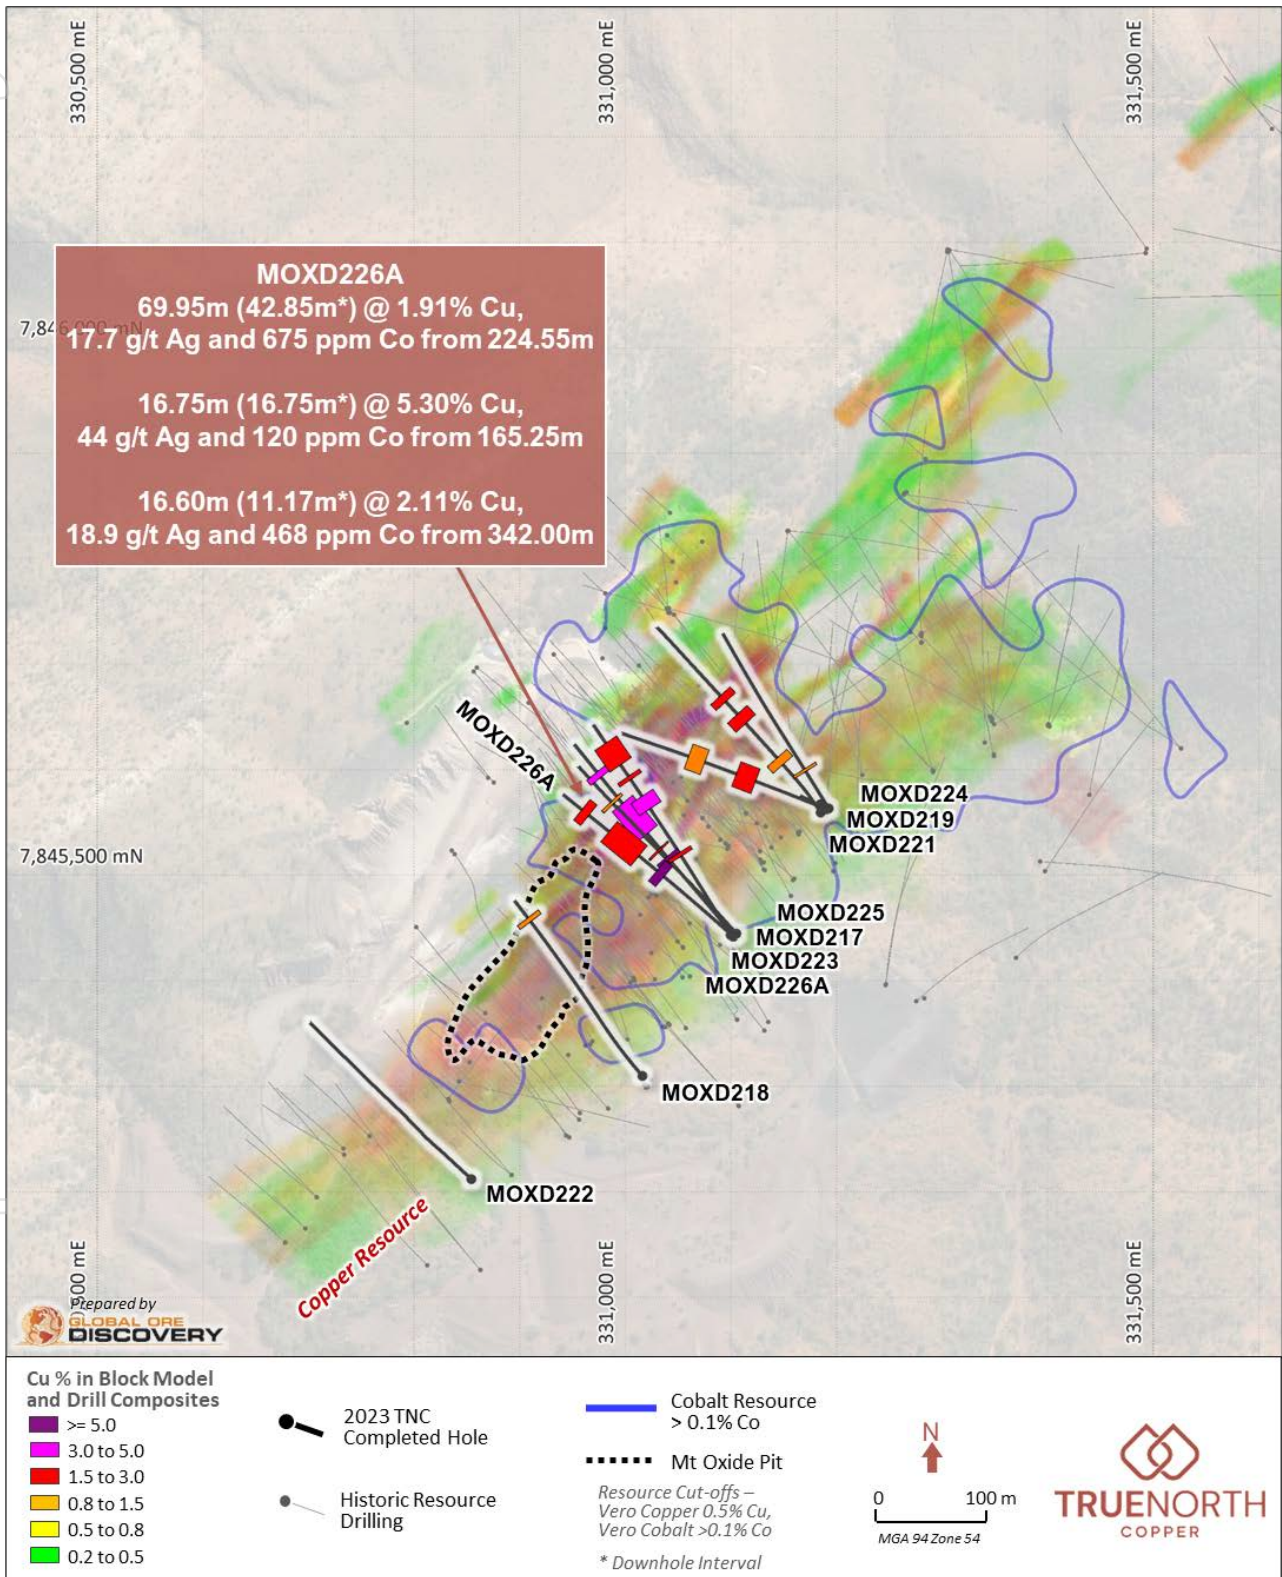


Figure 3. Plan view showing the all-collar location and drill traces from the 2023 drill Vero drill program including MOXD226A. Copper Block model displayed at > 0.2% Cu. Resource Cutoffs – Vero Copper 0.5% Cu and Vero Cobalt 0.1% Co and new TNC intercepts for MOXD226A (this release) and MOXD217-225 <sup>1,2,3</sup> previously released.





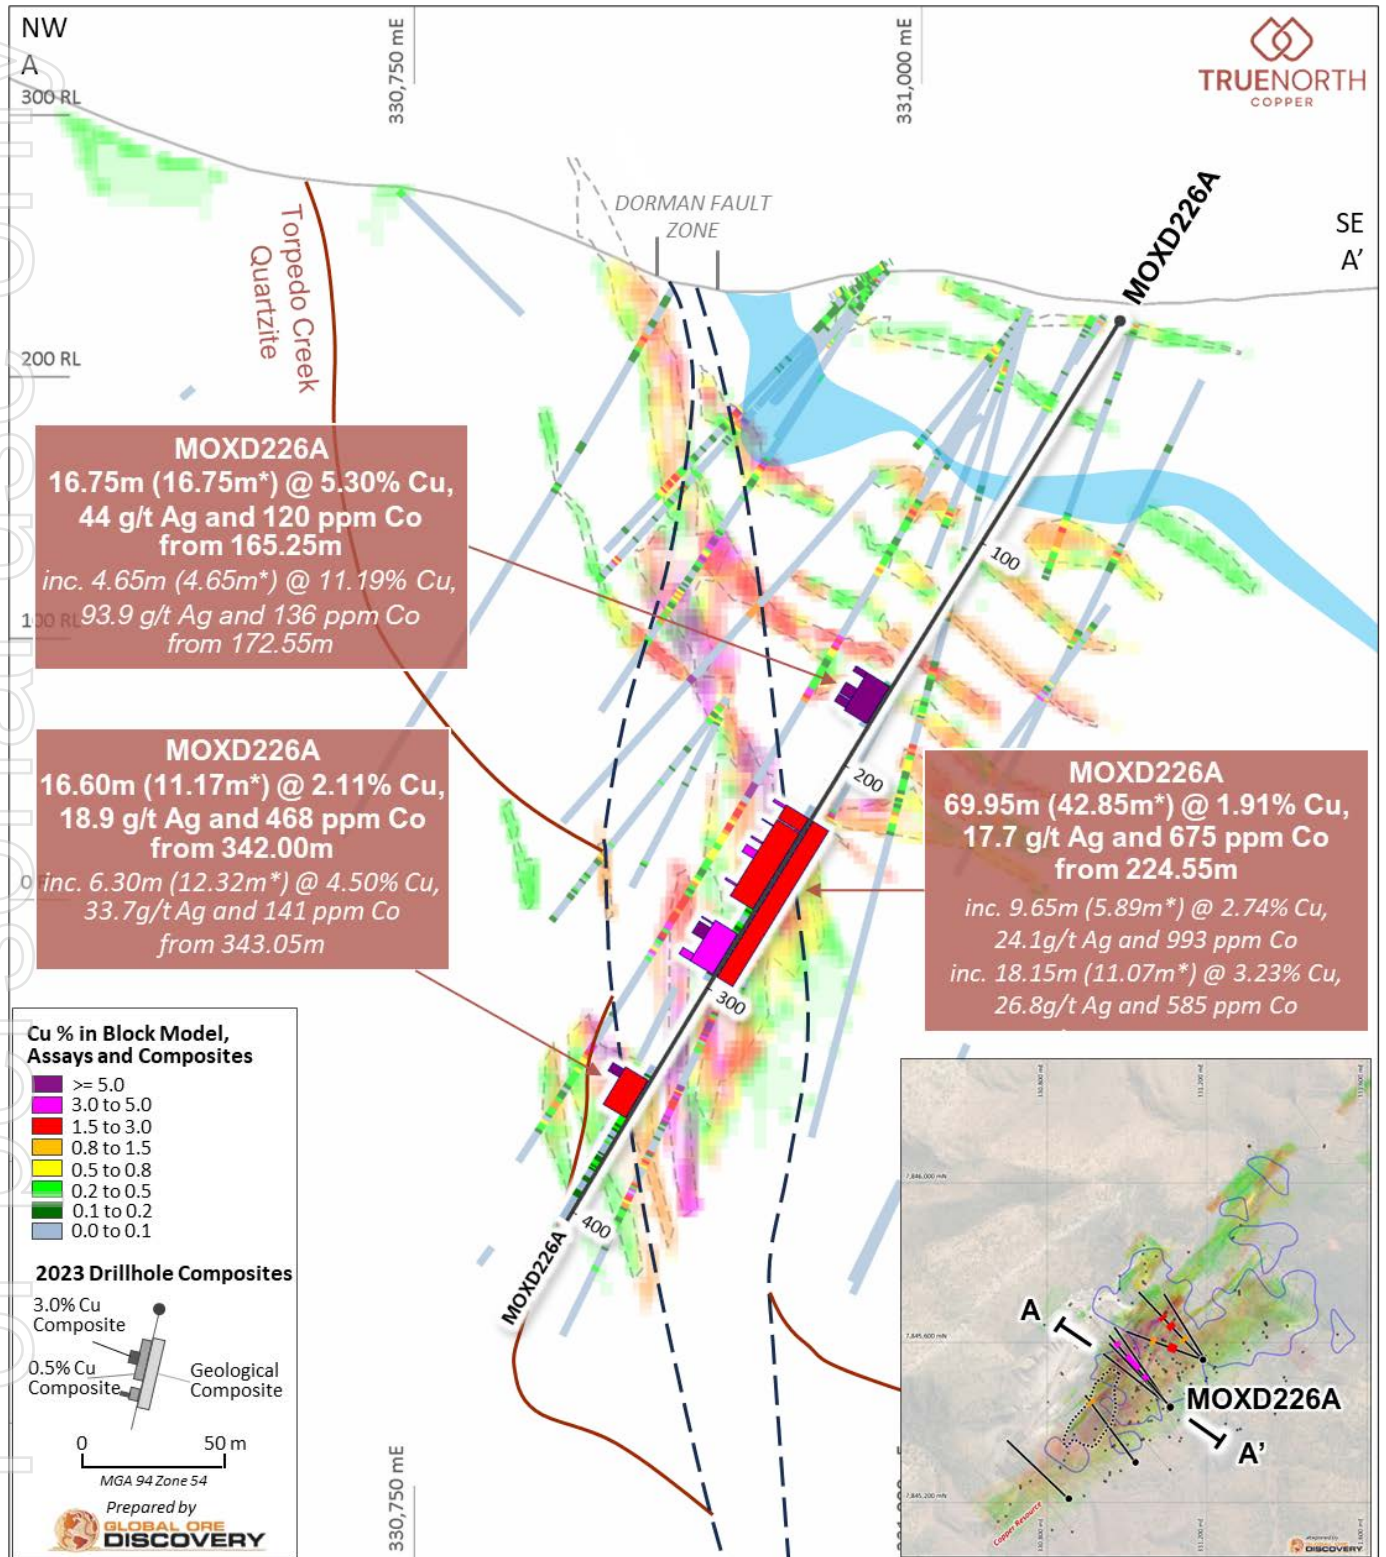

## REFERENCES

- 1 True North Copper Limited. ASX (TNC): Release 10 August 2023, *TNC intersects 66.5m at 4.95% Cu in first drillhole at Vero Resource, Mt Oxide.*
- 2 True North Copper. ASX (TNC): Release 14 November 2023, *TNC intersects 26.20m @4.45% Cu, Vero.*
- 3 True North Copper. ASX (TNC): Release 20 September 2023, *Drilling returns up to 7.65% Copper, Vero Resource.*
- 4 True North Copper. ASX (TNC): Release 23 October 2023, *Vero Resource, exceptional visual copper mineralisation.*
- 5 True North Copper. ASX (TNC): Release 28 February 2023, *Acquisition of the True North Copper Assets.*
- 6 Perilya Limited. ASX (PER): Release 5 June 2008, *Spectacular drill intercepts increase potential of the Mount Oxide Copper Project.*

## AUTHORISATION

This announcement has been approved for issue by Marty Costello, Managing Director and the True North Copper Limited Board.

## COMPETENT PERSON'S STATEMENT

Mr Daryl Nunn

The information in this announcement includes exploration results comprising MOXD226A assay results. Interpretation of these assay results is based on information compiled by Mr Daryl Nunn, who is a fulltime employee of Global Ore Discovery who provide geological consulting services to True North Copper Limited. Mr Nunn is a Fellow of the Australian Institute of Geoscientists, (FAIG): #7057. Mr Nunn has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the Australasian Code for the Reporting of Exploration Results, Mineral Resources, and Ore Reserves (JORC Code). Mr Nunn and Global Ore Discovery hold shares in True North Copper Limited.

## DISCLAIMER

This release has been prepared by True North Copper Limited ABN 28 119 421 868 ("TNC" "True North" or the "Company"). The information contained in this release is for information purposes only. This release may not be reproduced, disseminated, quoted or referred to, in whole or in part, without the express consent of TNC.

The information contained in this release is not investment or financial product advice and is not intended to be used as the basis for making an investment decision. Please note that, in providing this release, TNC has not considered the objectives, financial position or needs of any particular recipient. The information contained in this release is not a substitute for detailed investigation or analysis of any particular issue and does not purport to be all of the information that a person would need to make an assessment of the Company or its assets. Current and potential investors should seek independent advice before making any investment decisions in regard to the Company or its activities.

No representation or warranty, express or implied, is made as to the fairness, accuracy, completeness or correctness of the information, opinions and conclusions contained in this news release. To the maximum extent permitted by law, none of TNC, its related bodies corporate, shareholders or respective directors, officers, employees, agents or advisors, nor any other person accepts any liability, including, without limitation, any liability arising out of fault or negligence for any loss arising from the use of information contained in this release.

This release includes "forward looking statements" within the meaning of securities laws of applicable jurisdictions. Forward looking statements can generally be identified by the use of the words "anticipate", "believe", "expect", "project", "forecast", "estimate", "likely", "intend", "should", "could", "may", "target", "plan" "guidance" and other similar expressions. Indications of, and guidance on, future earning or dividends and financial position and performance are also forward-looking statements.

Such forward-looking statements are not guarantees of future performance and involve known and unknown risks, uncertainties and other factors, many of which are beyond the control of TNC and its officers, employees, agents or associates, that may cause actual results to differ materially from those expressed or implied in such statement. Actual results, performance or achievements may vary materially from any projections and forward looking statements and the assumptions on which those statements are based. Readers are cautioned not to place undue reliance on forward looking statements and TNC assumes no obligation to update such information. Specific regard (amongst other things) should be given to the risk factors outlined in this release.

This release is not, and does not constitute, an offer to sell or the solicitation, invitation or recommendation to purchase any securities and neither this release nor anything contained in it forms the basis of any contract or commitment.

## JORC AND PREVIOUS DISCLOSURE

The information in this release that relates to Mineral Resource Estimates for the Vero Resource is based on information previously disclosed in the Company's 28 February 2023 ASX release "Acquisition of the True North Copper Assets".

The information in this release that relates to exploration results for MOXD217 to MOXD225 is based on information previously disclosed in the following Company ASX Announcements:

- True North Copper Limited. ASX (TNC): Release 10 August 2023, *TNC intersects 66.5m at 4.95% Cu in first drillhole at Vero Resource, Mt Oxide.*
- True North Copper. ASX (TNC): Release 20 September 2023, *Drilling returns up to 7.65% Copper, Vero Resource.*
- True North Copper. ASX (TNC): Release 23 October 2023, *Vero Resource, exceptional visual copper mineralization*
- True North Copper. ASX (TNC): Release 14 November 2023, *TNC intersects 26.20m @4.45% Cu, Vero.*

All of these ASX Announcements are available on the Company's website ([www.truenorthcopper.com.au](http://www.truenorthcopper.com.au)) and the ASX website ([www.asx.com.au](http://www.asx.com.au)) under the Company's ticker code "TNC".

The Company confirms that it is not aware of any new information as at the date of this release that materially affects the information included in this release and that all material assumptions and technical parameters underpinning the estimates and results continue to apply and have not materially changed.

## CONTACT DETAILS

For further information please contact:

**True North Copper** | Marty Costello, Managing Director | 07 4031 0644

**Media Queries** | Nathan Ryan | NWR Communications | 0420 582 887 [nathan.ryan@nwrcommunications.com.au](mailto:nathan.ryan@nwrcommunications.com.au)



# APPENDIX 1

Cross Sections, Plans, and Intercept Tables

For personal use only

Table 2: Copper, silver and cobalt composites from hole MOXD226A.

| Hole ID  | Depth From (m) | Depth To (m) | Downhole Interval (m) | Estimated True Width ETW (m) | Cu %  | Ag g/t | Co ppm |
|--|----------------|--------------|-----------------------|------------------------------|-------|--------|--------|
| <b>Geological Composites</b>                     |                |              |                       |                              |       |        |        |
| MOXD226A   | 224.55         | 294.50       | 69.95                 | 42.85                        | 1.91  | 17.7   | 675    |
| <b>3% Cu cut off with 2m interval dilution</b>   |                |              |                       |                              |       |        |        |
| Hole ID  | Depth From (m) | Depth To (m) | Downhole Interval (m) | Estimated True Width ETW (m) | Cu %  | Ag g/t | Co ppm |
| MOXD226A   | 165.25         | 167.50       | 2.25                  | 2.25                         | 5.29  | 41.4   | 102    |
| MOXD226A   | 172.55         | 177.20       | 4.65                  | 4.65                         | 11.19 | 93.9   | 136    |
| MOXD226A   | 177.80         | 181.00       | 3.20                  | 3.20                         | 5.34  | 40.8   | 36     |
| MOXD226A   | 225.00         | 226.10       | 1.10                  | 0.67                         | 4.21  | 48.7   | 1050   |
| MOXD226A   | 233.80         | 234.20       | 0.40                  | 0.24                         | 3.49  | 34.8   | 4110   |
| MOXD226A   | 241.50         | 242.20       | 0.70                  | 0.43                         | 4.25  | 41.1   | 2230   |
| MOXD226A   | 245.30         | 248.60       | 3.30                  | 2.01                         | 4.55  | 35.4   | 793    |
| MOXD226A   | 260.30         | 261.10       | 0.80                  | 0.49                         | 3.88  | 32.1   | 723    |
| MOXD226A   | 277.65         | 278.20       | 0.55                  | 0.34                         | 3.14  | 23.6   | 835    |
| MOXD226A   | 279.80         | 284.97       | 5.17                  | 3.15                         | 5.23  | 36.6   | 871    |
| MOXD226A   | 291.60         | 294.50       | 2.90                  | 1.77                         | 4.69  | 40.4   | 65     |
| MOXD226A   | 343.05         | 346.62       | 3.57                  | 2.39                         | 6.58  | 47.3   | 98     |
| <b>1% Cu cut off with 2m interval dilution</b>   |                |              |                       |                              |       |        |        |
| Hole ID  | Depth From (m) | Depth To (m) | Downhole Interval (m) | Estimated True Width ETW (m) | Cu %  | Ag g/t | Co ppm |
| MOXD226A   | 165.25         | 168.25       | 3.00                  | 3.00                         | 4.55  | 35.9   | 90     |
| MOXD226A   | 171.10         | 177.20       | 6.10                  | 6.10                         | 9.00  | 76.1   | 179    |
| MOXD226A   | 177.80         | 181.00       | 3.20                  | 3.20                         | 5.34  | 40.8   | 36     |
| MOXD226A   | 224.55         | 226.60       | 2.05                  | 1.25                         | 3.16  | 36.1   | 767    |
| MOXD226A   | 227.40         | 234.20       | 6.80                  | 4.15                         | 1.60  | 21.8   | 1785   |
| MOXD226A   | 238.15         | 238.90       | 0.75                  | 0.46                         | 1.33  | 10.7   | 1245   |
| MOXD226A   | 239.50         | 249.15       | 9.65                  | 5.89                         | 2.74  | 24.1   | 993    |
| MOXD226A   | 252.60         | 265.30       | 12.70                 | 7.75                         | 1.84  | 17.0   | 509    |
| MOXD226A   | 276.35         | 294.50       | 18.15                 | 11.07                        | 3.23  | 26.8   | 585    |
| MOXD226A   | 343.05         | 349.35       | 6.30                  | 4.22                         | 4.50  | 33.7   | 141    |
| MOXD226A   | 356.30         | 357.13       | 0.83                  | 0.56                         | 1.13  | 16.5   | 1735   |
| <b>0.5% Cu cut off with 4m interval dilution</b> |                |              |                       |                              |       |        |        |
| Hole ID  | Depth From (m) | Depth To (m) | Downhole Interval (m) | Estimated True Width ETW (m) | Cu %  | Ag g/t | Co ppm |
| MOXD226A   | 165.25         | 182.00       | 16.75                 | 16.75                        | 5.30  | 44.0   | 120    |
| MOXD226A   | 224.55         | 230.55       | 6.00                  | 3.66                         | 1.91  | 25.7   | 1003   |
| MOXD226A   | 231.10         | 265.30       | 34.20                 | 20.86                        | 1.80  | 17.0   | 832    |
| MOXD226A   | 276.35         | 294.50       | 18.15                 | 11.07                        | 3.23  | 26.8   | 585    |
| MOXD226A   | 342.00         | 358.60       | 16.60                 | 11.17                        | 2.11  | 18.9   | 468    |



**Table 3: Collar information for MOXD217-226A completed by TNC in 2023 at the Vero Deposit, Mt Oxide Project.**

| Hole ID  | Easting MGA2020 | Northing MGA2020 | RL AHD | Dip | Azimuth MGA2020 | RC Precollar Depth (m) | Total Depth (m) | Hole Type | Drilling Status | Survey Method |
|----------|-----------------|------------------|--------|-----|-----------------|------------------------|-----------------|-----------|-----------------|---------------|
| MOXD217  | 331101          | 7845443          | 223    | -58 | 320             | -                      | 427.90          | DD        | Complete        | DGPS          |
| MOXD218  | 331015          | 7845309          | 246    | -56 | 319             | 150.5                  | 408.00          | RCDD      | Complete        | DGPS          |
| MOXD219  | 331185          | 7845559          | 244    | -60 | 327             | 149                    | 455.30          | RCDD      | Complete        | DGPS          |
| MOXD220  | 331191          | 7845563          | 244    | -63 | 294             | 60                     | 60.00           | RC        | Abandoned       | DGPS          |
| MOXD221  | 331192          | 7845564          | 244    | -62 | 291             | -                      | 456.80          | DD        | Complete        | DGPS          |
| MOXD222  | 330852          | 7845211          | 233    | -54 | 314             | 182                    | 366.60          | RCDD      | Complete        | DGPS          |
| MOXD223  | 331104          | 7845444          | 223    | -62 | 317             | -                      | 468.40          | DD        | Complete        | DGPS          |
| MOXD224  | 331193          | 7845565          | 244    | -63 | 329             | -                      | 405.10          | DD        | Complete        | DGPS          |
| MOXD224A | 331185          | 7845569          | 245    | -63 | 329             | -                      | 12.00           | DD        | Abandoned       | DGPS          |
| MOXD225  | 331100          | 7845445          | 223    | -56 | 327             | -                      | 438.70          | DD        | Complete        | GPS           |
| MOXD226  | 331102          | 7845443          | 223    | -59 | 312             | -                      | 52.40           | DD        | Abandoned       | GPS           |
| MOXD226A | 331102          | 7845443          | 223    | -58 | 311             | -                      | 404.00          | DD        | Complete        | GPS           |

For personal use only

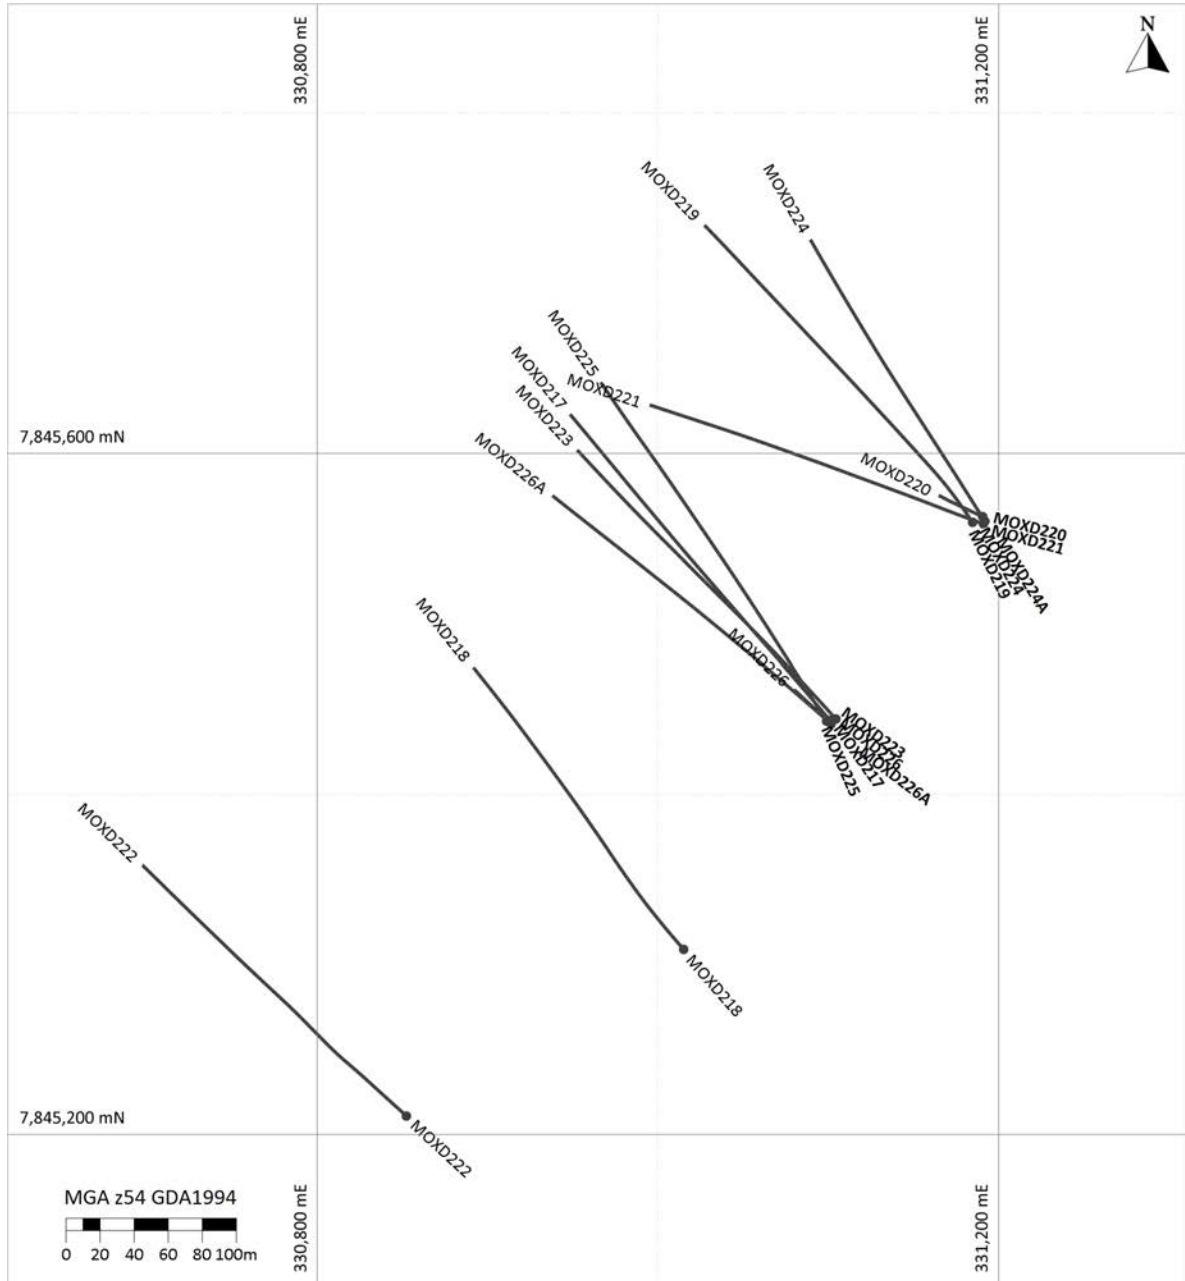


Figure 5. Plan view showing the collar location and drill trace of holes listed in Table 3.



**APPENDIX 2**  
JORC CODE – 2012 EDITION – TABLE 1

For personal use only

## JORC CODE 2012 EDITION, TABLE 1

### Section 1. Sampling Techniques and Data

This Table 1 refers to current 2023 drilling completed by True North Copper (TNC) at the Vero Resource, Mt Oxide Project.

| Criteria                   | JORC Code explanation  | Commentary   |
|----------------------------|--|--|
| <b>Sampling techniques</b> | <ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul> | <ul style="list-style-type: none"> <li>The Mt Oxide, Vero Resource infill drill program is complete with 10 holes drilled for 3,955 m of mixed diamond and reverse circulation (RC).</li> <li>This JORC Table.1 covers all 10 holes drilled in the program.</li> <li>Assays for the last drillhole of the program, MOXD226A is being reported in this news release.</li> </ul> <p><b>Sample Representativity</b></p> <p><b>Diamond</b></p> <ul style="list-style-type: none"> <li>Diamond core sample intervals are varied to respect geological, alteration or mineralisation contacts noted during logging. Samples lengths range from 0.5 to a maximum of 1.75 m in length but are predominantly 1.0 m in length. Sample intervals are recorded on a cut sheet that lists Hole ID, a sample interval (From and To), a sample ID, insertion points of QA/QC samples, the QA/QC type and additional comments, including potential core loss within the sample.</li> <li>Diamond core is cut longitudinally into 2 equal halves by a Corewise automatic core saw. Where possible the core is cut adjacent to the orientation or cut line with the orientation line retained. Half-core is placed in pre-numbered calico bags for assaying. For field duplicate samples the core is cut in half and then quartered with each quarter put into separate pre-numbered calico sample bags for assaying. The remaining half core is returned to the tray.</li> </ul> <p><b>Reverse Circulation (RC)</b></p> <ul style="list-style-type: none"> <li>No RC results are reported in this release.</li> <li>RC drilling collected samples during the drilling process using industry standard techniques including face sampling drill bit and an on-board cone splitter.</li> <li>Chip samples are collected from the drill cuttings and sieved and put into chip trays for geological logging.</li> <li>Cone splitting is an industry standard sampling device which sub-splits the metre drilled into representative samples.</li> <li>QAQC measures including the use of duplicate samples checks the suitability of this method to retain representative samples. Based on a review of the sampling data, samples are representative of the interval drilled.</li> <li>Reverse circulation drilling was used to obtain 1 m samples which were collected from the cone splitter to produce an approximately 2-4 kg sample. Because of moisture, nine primary underweight samples were re-split from the remaining bulk reject sample using a standalone 50/50 splitter via two passes.</li> <li>MOXD226A does not have an RC precollar</li> </ul> <p><b>Assaying</b></p> <ul style="list-style-type: none"> <li>Samples were submitted to Australian Laboratory Services (ALS) an ISO certified contract laboratory in Mt Isa.</li> <li>Sample preparation comprised drying, crushing and pulverisation prior to analysis.</li> <li>Samples were submitted for multi-element analysis by ME-ICP61 comprising a near total 4 Acid Digestion with ICP-AES finish for Ag, Al, As, Ba, Be, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, K, La, Li, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sr, Th, Ti, U, V, W &amp; Zn. Over range copper, cobalt and silver is re-analysed using a standard Ore Grade methods of Cu-OG62, Co-OG62 and Ag-OG62 respectively.</li> </ul> |
| <b>Drilling techniques</b> | <ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>  | <ul style="list-style-type: none"> <li>The drilling was completed by Australian Exploration Drilling Pty Ltd using a dual-purpose McCulloch 800 drill rig.</li> <li>MOXD217 was cored from surface with HQ3 (triple tube) coring using a chrome barrel to end of depth at 427.9 m.</li> <li>MOXD218 was RC pre-collared using a 5.5" hammer to a depth of 150.5 m with HQ3 (triple tube) coring using a chrome barrel from 150.5 m to end of hole at 408.0 m.</li> <li>MOXD219 was RC pre-collared using a 5.5" hammer to a depth of 149.0 m with HQ3 (triple tube) coring using a chrome barrel from 149.0 m to end of hole at 455.3 m.</li> <li>MOXD222 was RC pre-collared using a 5.5" hammer to a depth of 182.0 m with HQ3 (triple tube) coring using a chrome barrel from 182.0 m to end of hole at 366.6 m.</li> <li>MOXD221 was drilled diamond core surface with PQ to 59.74 m then HQ3 (triple tube) coring using a chrome barrel from 59.74 m to end of depth at 456.8 m.</li> <li>MOXD223 was drilled diamond core surface with PQ to 11.8 m then HQ3 (triple tube) coring using a chrome barrel from 11.8 m to end of depth at 468.4 m.</li> <li>MOXD224 was drilled diamond core surface with PQ to 59.6 m then HQ3 (triple tube) coring using a chrome barrel from 59.6 m to end of depth at 405.1 m.</li> <li>MOXD225 was drilled diamond core surface with PQ to 11.5 m then HQ3 (triple tube) coring using a chrome barrel from 11.5 m to end of depth at 438.7 m.</li> </ul>   |

| Criteria  | JORC Code explanation  | Commentary  |
|---|--|---|
| <b>Drill sample recovery</b>                          | <ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>                                       | <ul style="list-style-type: none"> <li>MOXD226A was drilled diamond core surface with PQ to 20.6 m then HQ3 (triple tube) coring using a chrome barrel from 20.6 m to end of depth at 404.0 m.</li> <li>Core diameter is 61.1 mm (HQ3) and 85 mm (PQ).</li> <li>All HQ3 core was orientated by the drilling crew using an industry standard REFLEX ACT III orientation tool for purposes of structural logging.</li> </ul> <p><b>Diamond Drilling</b></p> <ul style="list-style-type: none"> <li>Sample recovery is noted on the drillers core blocks and verified by the field technician and supervising geologist.</li> <li>Core recovery is captured digitally into Microsoft Excel templates with internal validation.</li> <li>Core Recovery is also recorded on a sample basis to ensure that analysis can be completed where recoveries may bias assays results.</li> <li>Core recovery is mostly 100 % for the sampled intervals.</li> </ul> <p><b>RC Drilling</b></p> <ul style="list-style-type: none"> <li>Drilling recovery is assessed by observing sample size. Samples are collected from the cyclone using a cone splitter and monitored for size to determine that they are representative.</li> <li>The cyclone and splitter were cleared at the end of each rod to minimise blockages and to obtain representative recoveries.</li> <li>Bulk 1 m sample size recovery and moisture is recorded qualitatively by the supervising geologist.</li> <li>MOXD226A does not have an RC precollar</li> </ul> <p><b>Assessment of Bias</b></p> <ul style="list-style-type: none"> <li>Recoveries for core samples were almost all 100%. Only 3 out of 201 samples were less than 100%. One of them was 90% and the other one 78%, however the last one was 40% all attributed to poor drill recovered. Assessment of the sampled showed no evidence of bias related to samples with low recoveries is evident for the assays reported thus far.</li> <li>Recoveries for RC samples were mostly excellent with only a few samples lighter than expected. No evidence of bias related to samples with low recoveries is evident for the assays reported thus far. No assay results for RC samples are reported here.</li> </ul> |
| <b>Logging</b>  | <ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>             | <ul style="list-style-type: none"> <li>Diamond drill core and RC chips were geologically logged in full.</li> <li>Logging of drill core and RC chips has been completed to the level of detail required to support future Mineral Resource Estimation. However, no Mineral Resource Estimation is reported in this release.</li> <li>Geological logging has been completed by a qualified geologist for the entire length of the hole, recording lithology, oxidation, alteration, veining, mineralisation, and structural data containing both qualitative and quantitative fields.</li> <li>Geotechnical information such as core run recovery and RQD was also collected.</li> <li>Key information such as metadata, collar and survey information are also recorded.</li> <li>Structural measurements are collected from the core where an orientation line is present. A Kenometre is used to collect structural measurements (alpha/beta/gamma) for structural features such as bedding, foliation, geological contacts, vein, and mineralisation contact orientations.</li> <li>Logging was captured directly into standardised Microsoft Excel templates with internal validations and set logging codes to ensure consistent data capture.</li> <li>Each core tray is photographed both wet and dry and trays that have been sampled are photographed after sampling. Photos include the Hole ID, meter marks, orientation line/cut line, sample numbers. Close up photos were taken of selected mineralised intervals and geological units for use in reporting.</li> <li>Chip trays are photographed both wet and dry.</li> </ul>  |
| <b>Sub-sampling techniques and sample preparation</b> | <ul style="list-style-type: none"> <li>If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>For all sample types, the nature, quality, and appropriateness of the sample preparation technique.</li> <li>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> </ul> | <ul style="list-style-type: none"> <li>Diamond core is cut longitudinally into 2 equal halves by a Corewise automatic core saw. Where possible core is cut adjacent to the orientation/cut line with the orientation line retained. Half-core is placed in pre-numbered calico bags for assaying. For field duplicate samples the core is cut in half and then quartered with each quarter put into separate pre-numbered calico sample bags for assaying. The remaining half core is returned to the tray.</li> <li>The RC precollar for MOXD219 was sampled at 1.0 m intervals via a rig mounted cone splitter. For each interval one split was collected into a calico bag labelled with the hole ID and the sample interval (i.e., 1-2 m). Because of moisture, nine primary underweight samples were resplit from the remaining bulk reject sample using a standalone 50/50 splitter via two passes to produce a 2-4 kg sample. For field duplicates a 2-4 kg sample was collected using a standalone 50/50 splitter via two passes using the remaining bulk reject sample.</li> <li>The RC precollars for MOXD218 and MOXD222 were not sampled.</li> <li>QA/QC analytical standards are photographed and the Standard ID removed, before it is placed into sample bag.</li> <li>Sample preparation is undertaken by ALS, an ISO certified contract laboratory.</li> <li>Sub sampling quality control duplicates are implemented for the lab sub sampling stages.</li> </ul>   |



| Criteria   | JORC Code explanation  | Commentary   |
|--|--|--|
|  | <ul style="list-style-type: none"> <li>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>  | <ul style="list-style-type: none"> <li>At the lab riffle split stage, the lab was instructed to take a coarse duplicate on the same original sample for the field duplicate.</li> <li>At the pulverising stage, the lab was instructed to take a pulp duplicate on the same original sample for the field duplicate.</li> <li>Additional ALS pulverisation quality control included sizings - measuring % material passing 75um.</li> <li>Quartz washes were requested during sample submission after visible high-grade mineralisation to minimise sample contamination.</li> <li>Sample sizes are considered appropriate and representative of the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and anticipated Cu, Ag, &amp; Co assay results.</li> </ul>  |
| <p><b>Quality of Assay data and laboratory tests</b></p> | <ul style="list-style-type: none"> <li>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</li> </ul> | <ul style="list-style-type: none"> <li>Samples were submitted to Australian Laboratory Services (ALS) at Mt Isa, an ISO certified contract laboratory for industry standard preparation and analysis.</li> <li>Sample preparation comprised drying, crushing and pulverisation prior to analysis.</li> <li>Samples were submitted for multi-element analysis by ME-ICP61 comprising a near total 4 Acid Digestion with ICP-AES finish for the Ag, Al, As, Ba, Be, Bi, Ca, Cd, Co, Cr, Cu, Fe, Ga, K, La, Li, Mg, Mn, Mo, Na, Ni, P, Pb, S, Sb, Sc, Sr, Th, Ti, Tl, U, V, W &amp; Zn. Over range copper and silver were re-analysed using standard Ore Grade methods Cu-OG62 and Ag-OG62 respectively. Over range sulphur was analysed by S-IR08.</li> <li>QAQC quantities relating to each lab batch are detailed in the Table below. Analytical standards are inserted at a minimum rate of 6 for every 100 samples, using 10-60g, certified reference material ("CRM") of sulphide or oxide material sourced from OREAS with known gold, copper, cobalt, &amp; silver values. The location of the standards in the sampling sequence was at the discretion of the logging geologist. Standards were selected to match the anticipated assay grade of the samples on either side of the standard in the sampling sequence.</li> <li>Coarse and pulp blanks are inserted at a rate of 2 for every 100 samples. The location of the blanks in the sampling sequence was at the discretion of the logging geologist.</li> <li>Field, lab coarse (crushing stage), and pulp (pulverising stage) duplicates are completed at a rate of 2 for every 100 samples with field duplicate samples taken as quarter core or duplicate samples of the bulk reject for RC. Duplicate sampling allows an assessment of overall precision, reflecting total combined sampling and analytical errors (field and laboratory).</li> <li>Quartz washes were also requested during sample submission after visible high-grade mineralisation to minimise sample contamination.</li> <li>ALS quality control includes blanks, standards, pulverisation repeat assays, weights and sizings.</li> <li>A signoff and photograph procedure are employed to document the standards ID and ensure that there was limited potential for mix-ups.</li> <li>Standards, blanks, and duplicates were analysed for Cu, Ag, and Co for each sample batch.</li> </ul> <p><b>Standards</b></p> <ul style="list-style-type: none"> <li>All standards returned acceptable values for Cu, Co, and Ag.</li> </ul> <p><b>Blanks</b></p> <ul style="list-style-type: none"> <li>Most pulp blanks and coarse blanks returned within 3SD for Cu, Co, and Ag.</li> <li>Low level Cu contamination was observed in 2 pulp blanks that were preceded by high-level Cu samples. They reported 1.5 to 7.5ppm Cu above the 3SD (48.6ppm). Given the low-level nature of the contamination it was not considered material to the reporting of results.</li> </ul> <p><b>Duplicates</b></p> <ul style="list-style-type: none"> <li>All lab coarse crush duplicates and the lab pulp duplicates, and most field duplicates returned results within expected tolerance, however one field duplicate showed 58% difference on Co 139 ppm Vs 334 ppm. This is attributed to the non-homogeneous style of the mineralization, and it is low level therefore considered acceptable.</li> </ul> <p><b>Sample Weights</b></p> <ul style="list-style-type: none"> <li>A review of the field sample weight and lab weight was done to identify possible sample swaps. There were very few weight discrepancies, most were rectifiable by reviewing original sample sheets and correct minor data entry errors.</li> </ul> <p><b>Insertion Rates</b></p> <ul style="list-style-type: none"> <li>All dispatches have met the recommended insertion rate for all standards, blanks, and duplicates as detailed in the table below.</li> </ul> |

| Criteria  | JORC Code explanation  | Commentary  |                             |              |             |                                |                       |                 |       |          |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
|---|--|---|-----------------------------|--------------|-------------|--------------------------------|-----------------------|-----------------|-------|----------|-----|--|--|-----------------------------|--------------|------------|------------------|-----------------------|-----------------|-------|----------|----------|-----------|------------|-----|-----|-----|-----|-----|-----|-----|----|-----|----------|-----------|------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
|   |  | <table border="1" data-bbox="884 457 2220 699"> <thead> <tr> <th rowspan="2">Holes</th> <th rowspan="2">Dispatch #</th> <th rowspan="2">Lab Batch #</th> <th colspan="8">Insertion rate per 100 samples</th> </tr> <tr> <th>Analytical standards (CRMs)</th> <th>Coarse Blank</th> <th>Pulp blank</th> <th>Field duplicates</th> <th>Lab coarse duplicates</th> <th>Pulp duplicates</th> <th>#orig</th> <th>#Orig+QC</th> </tr> </thead> <tbody> <tr> <td>MOXD226A</td> <td>TNR012256</td> <td>MI23311140</td> <td>6.2</td> <td>3.1</td> <td>2.1</td> <td>2.1</td> <td>2.1</td> <td>2.1</td> <td>2.1</td> <td>91</td> <td>114</td> </tr> <tr> <td>MOXD226A</td> <td>TNR012370</td> <td>MI23311172</td> <td>6.7</td> <td>1.9</td> <td>1.9</td> <td>2.9</td> <td>2.9</td> <td>2.9</td> <td>2.9</td> <td>104</td> <td>124</td> </tr> </tbody> </table>   | Holes                       | Dispatch #   | Lab Batch # | Insertion rate per 100 samples |                       |                 |       |          |     |  |  | Analytical standards (CRMs) | Coarse Blank | Pulp blank | Field duplicates | Lab coarse duplicates | Pulp duplicates | #orig | #Orig+QC | MOXD226A | TNR012256 | MI23311140 | 6.2 | 3.1 | 2.1 | 2.1 | 2.1 | 2.1 | 2.1 | 91 | 114 | MOXD226A | TNR012370 | MI23311172 | 6.7 | 1.9 | 1.9 | 2.9 | 2.9 | 2.9 | 2.9 | 104 | 124 |
| Holes   | Dispatch #   | Lab Batch #   |                             |              |             | Insertion rate per 100 samples |                       |                 |       |          |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
|   |  |   | Analytical standards (CRMs) | Coarse Blank | Pulp blank  | Field duplicates               | Lab coarse duplicates | Pulp duplicates | #orig | #Orig+QC |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
| MOXD226A  | TNR012256  | MI23311140  | 6.2                         | 3.1          | 2.1         | 2.1                            | 2.1                   | 2.1             | 2.1   | 91       | 114 |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
| MOXD226A  | TNR012370  | MI23311172  | 6.7                         | 1.9          | 1.9         | 2.9                            | 2.9                   | 2.9             | 2.9   | 104      | 124 |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
| <p><b>Verification of sampling and assaying</b></p> | <ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, and data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>                | <ul style="list-style-type: none"> <li>Logging of all holes was completed by a suitably qualified geologist. Logging was reviewed onsite by the competent person.</li> <li>Assay intersections were checked against core, photos, and recovery by the supervising geologist.</li> <li>TNC standards, blanks and pulp duplicates, lab standards, blanks and repeats were reviewed for each batch.</li> <li>Primary data is collected either onto paper or directly into standardised Microsoft Excel templates with internal validations and set logging codes to ensure consistency of the captured data. Paper records are entered into the standardised Microsoft Excel templates.</li> <li>Data is stored on a private cloud NAS server hosted featuring multi-site replication (Resilio Connect), redundancy (RAID), onsite and offsite backups (via tape and cloud backup). These servers are protected via FortiGate Firewall's with IPS/IDS, least privilege access, regular security patching and proactive security monitoring including regular audits by consultant IT team.</li> <li>No specific twinning program has been conducted.</li> <li>No adjustments were made to assay data.</li> </ul> |                             |              |             |                                |                       |                 |       |          |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
| <p><b>Location of data points</b></p>               | <ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>  | <ul style="list-style-type: none"> <li>The grid system used is GDA94 – MGA Zone 54 datum for map projection for easting/northing/RL.</li> <li>The collars were located prior to drilling using a handheld Garmin GPSMAP 66I GPS by the supervising geologist. Where collars could be located they have been picked up using a Trimble DGPS, accurate to within 10cm by a trained field technician. See Table 3 for collar location details.</li> <li>All holes were downhole surveyed using a REFLEX EZ-Gyro north seeking Gyro at 30m intervals during drilling.</li> <li>Hole deviation was monitored by the geologist during drilling.</li> <li>A multi-shot survey at 10m intervals was complete at end of hole using a REFLEX EZ-Gyro north seeking Gyro.</li> <li>Topography information in relation to Mt Oxide was carried out in 1992 by Mr David Turton of AAM Surveys PTY LTD. David Turton digitised contours from aerial photography dated October 1989. It references M H Lodewyk P/L who supplied the vertical datum.</li> </ul>   |                             |              |             |                                |                       |                 |       |          |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
| <p><b>Data spacing and distribution</b></p>         | <ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul> | <ul style="list-style-type: none"> <li>Historical drillholes are nominally spaced at 25 m by 25 m between 70,600 mN and 70,950 mN. Outside this area the drill spacing is irregular at approximately 50 m by 50 m.</li> <li>Holes are spaced at 5 to 60 m from historic drilling.</li> <li>Sample assay compositing has been completed at varying grade cut offs and where appropriate geological composites have been completed.</li> </ul> <p><b>No Mineral Resource and Ore Reserve estimation is reported in this release.</b></p>  |                             |              |             |                                |                       |                 |       |          |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |
| <p><b>Orientation of data in relation to</b></p>    | <ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible</li> </ul>   | <ul style="list-style-type: none"> <li>Holes are oriented to optimise the intersection angle and manage sample bias for the two dominant orientations of mineralisation observed withing the Vero Resource. Due to the two orientations of mineralisation the reported visual intercepts are not perpendicular and vary as outlined below.</li> </ul>   |                             |              |             |                                |                       |                 |       |          |     |  |  |                             |              |            |                  |                       |                 |       |          |          |           |            |     |     |     |     |     |     |     |    |     |          |           |            |     |     |     |     |     |     |     |     |     |

| Criteria                    | JORC Code explanation   | Commentary  |
|-----------------------------|---|---|
| <b>geological structure</b> | <p>structures and the extent to which this is known, considering the deposit type.</p> <ul style="list-style-type: none"> <li>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</li> </ul> | <ul style="list-style-type: none"> <li>Mineralisation intercepted above 200 m down hole is predominantly strata bound and so bedding parallel dipping at 30-50° to the east. True widths of this style of mineralisation are estimated to be 97-100% of the downhole intersection interval reported.</li> <li>Mineralisation intercepted below 200 m down hole through to the end of hole is oriented subparallel to the steeply 60-70° east dipping Dorman Shear. True widths of this style of mineralisation are estimated to be 63-73% of the downhole interval in all holes.</li> <li>Estimated True Widths are presented in Table 1 and Table 2</li> </ul> |
| <b>Sample security</b>      | <ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>   | <ul style="list-style-type: none"> <li>Sample security protocols adopted by TNC are documented. TNC site personnel with the appropriate experience and knowledge manage the chain of custody protocols for drill samples from site to laboratory.</li> </ul>  |
| <b>Audits or reviews</b>    | <ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>   | <ul style="list-style-type: none"> <li>No audits or reviews undertaken.</li> </ul>  |

## Section 2. Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

| Criteria                                       | JORC Code explanation  | Commentary   |
|--|--|--|
| <b>Mineral tenement and land tenure status</b> | <ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul> | <ul style="list-style-type: none"> <li>EPM 10313 is an amalgamation of EPM's 6085, 6086 and 8277 which were applied for by BHP on behalf of a joint ventures (JV) with Perilya Mines NL.</li> <li>EPM 10313 "Mt Oxide" was granted to Perilya Mines NL (30%) and BHP Minerals Pty Ltd (70%) in 1994.</li> <li>In May 1996 Perilya Mines NL transferred its 30% interest in the JV to Freehold Mining, a wholly owned subsidiary of Perilya Mines NL.</li> <li>In September 1997, BHP withdrew from the JV and Freehold Mining acquired 100% interest in the permit.</li> <li>In July 2003, Western Metals Copper Limited acquired a 60% share in the permit, however this was subsequently returned to Freehold Mining Limited in April 2004.</li> <li>In July 2008 100% interest the EPM was transferred to Perilya Mining PTY LTD from Freehold Mining. In February 2009 it was transferred to Mount Oxide PTY LTD and wholly owned subsidiary of Perilya Mines NL. Mount Oxide PTY LTD are the current (100%) holders of the Permit.</li> <li>In June 2023 100% of the license was transferred from Perilya Resources to TNC.</li> </ul>  |
| <b>Exploration done by other parties</b>       | <ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>  | <ul style="list-style-type: none"> <li><b>Broken Hill South 1960s:</b> Geological mapping, grab sampling, and percussion drilling.</li> <li><b>Kennecott Exploration Australia 1964-1967:</b> Stream sediment sampling, surface geochemical sampling, air photo interpretation and subsequent anomaly mapping.</li> <li><b>Kern County Land Company &amp; Union Oil Co 1966-1967:</b> Surface geochemical sampling, geological mapping, diamond drilling.</li> <li><b>Western Nuclear Australia Pty Ltd 1960-1970:</b> Airborne &amp; ground radiometrics, rock chip sampling, diamond drilling (2 holes for 237 m).</li> <li><b>Eastern Copper Mines 1971-1972:</b> Stream sediment and surface geochemical sampling, airborne magnetics and radiometrics, geological mapping, drilling of 8 holes in the Theresa area.</li> <li><b>Consolidated Goldfields &amp; Mitsubishi 1972-1973:</b> Stream sediment and rock chip sampling, geological mapping.</li> <li><b>RGC 1972-1976:</b> Aerial photography and photogeological interpretation.</li> <li><b>BHP 1975-1976:</b> Geological mapping, surface geochemical sampling.</li> <li><b>BHP / Dampier Mining Co Ltd 1976:</b> Surface geochemical sampling, geological mapping and petrography, RC drilling.</li> <li><b>Newmont 1977-1978:</b> Surface geochemical sampling, geological mapping, diamond drilling, air photo interpretation.</li> </ul> |



| Criteria              | JORC Code explanation  | Commentary   |
|-----------------------|--|--|
|                       |  | <ul style="list-style-type: none"> <li>▪ <b>Paciminex late 1970s:</b> Geological mapping, surface geochemical sampling, ground IP.</li> <li>▪ <b>AMACO Minerals Australia Co 1980-1981:</b> Surface geochemical sampling, geological mapping, gravity survey.</li> <li>▪ <b>C.E.C. Pty Ltd 1981-1982:</b> Surface geochemical sampling.</li> <li>▪ <b>BHP 1982-1983:</b> Geological literature review, mapping, aerial photo interpretation, stream sediment samples, 962 soil samples, rock chip sampling, IP survey.</li> <li>▪ <b>W.M.C. 1985-1993:</b> Geological mapping, surface geochemical sampling, transient EM surveys.</li> <li>▪ <b>C.S.R. Ltd: 1988-1989:</b> Surface geochemical sampling.</li> <li>▪ <b>Mentana 1990:</b> Geological mapping, surface geochemical sampling, air photo interpretation.</li> <li>▪ <b>Placer Exploration Ltd 1991-1994:</b> Surface geochemical sampling, literature reviews, stream sediment (BLEG) sampling, carbonate isotopic analyses, reconnaissance rock chip sampling and geological traversing, RC drilling (5 holes, 452 m), one diamond hole for 134.3 m, downhole EM.</li> <li>▪ <b>BHP/Perilya JV 1995:</b> Geological mapping, soil, and rock chip sampling, Pb isotope determinations and five (5) diamond drill holes all concentrated on the Myally Creek Prospect.</li> <li>▪ <b>Western Metals 2002-2003:</b> Diamond drilling (8 holes totaling 1332.3 m), rock chip sampling, surface geochemical mapping, GeoTEM survey.</li> <li>▪ <b>Perilya 2003-2023</b> - Between 2005 and 2011, Perilya drilled 187 diamond drill holes for a total of 49,477 m at the Mt Oxide Vero Deposit. Drilling at the Vero Deposit culminated two sperate but overlapping JORC 2012 Mineral resource estimations. These are:             <ul style="list-style-type: none"> <li>▪ The Vero Copper-Silver mineral resource containing 'Indicated and Inferred' resources at 15.9 million tonnes at an average grade of 1.43% using a cut-off Cu grade of 0.5% Cu, with silver credits.</li> <li>▪ The Vero Cobalt Resource contains 9.15 Mt at 0.23% cobalt at a 0.1% Co cut-off.</li> </ul> </li> <li>▪ Perilya also completed a number of mapping, surface geochemical sampling and geophysical surveys over the exploration tenement which defined multiple exploration targets some of which remain poorly tested.</li> </ul>   |
| <p><b>Geology</b></p> | <ul style="list-style-type: none"> <li>▪ Deposit type, geological setting, and style of mineralisation.</li> </ul> | <ul style="list-style-type: none"> <li>▪ The Mount Oxide deposit is located in the Western fold belt of the Mount Isa Inlier, a world-class metallogenic province. The host lithologies for the Mt Oxide deposit are the mid-Proterozoic sedimentary units of the McNamara Group, that are known to host other copper deposits such as Esperanza and Mammoth.</li> <li>▪ At the regional scale Mt Oxide mineralisation is localised by a +100 km long NS oriented structural corridor, the Mt Gordon Fault Zone which is also a key structural control localising the Gunpowder copper-silver-cobalt deposit.</li> <li>▪ The Mt Oxide copper-silver-cobalt mineralisation is associated with extensive development of hematite replacement and breccias developed within the Gunpowder formation. The hematite is interpreted to paragenetically precede introduction of sulphide mineralisation. The presence of a significate Fe oxide association with the mineralisation suggests that the Mt Oxide mineralisation may be an endmember to the IOCG class of deposit known elsewhere within Mt Isa inlier.</li> <li>▪ The majority of the Mt Oxide copper-silver-cobalt mineralisation outlined by drilling to date is hosted either within the Dorman fault zone or within the hanging wall siltstones, carbonaceous shales, and conglomerates of the Gunpowder formation. No significant mineralisation is known to occur stratigraphically above the Mt Oxide Chert.</li> <li>▪ However, the deeper holes drilled by Perilya toward the end of drilling campaigns at the project showed some high-grade copper-silver mineralisation is hosted within the footwall of the fault zone within the quartzites of the Torpedo creek Formation. Further drilling is required to test if this high-grade copper-silver mineralisation continues to depth and is in fact in the footwall.</li> <li>▪ In detail mineralisation is present in two distinct structural/stratigraphic domains.</li> <li>▪ A western structural domain consisting of a north-south trending, steeply easterly dipping zone of mineralisation hosted within and adjacent to the Dorman fault zone that contains the higher-grade (+3%) copper mineralisation.</li> <li>▪ A stratigraphic domain consisting of a series of sub-parallel, shallow-moderately (20 to 30°) easterly dipping zones of lower grade copper and the higher grade and more coherent zones of cobalt mineralisation within the Gunpowder sediments.</li> <li>▪ Copper mineralisation is dominated by chalcocite, with subordinate bornite and chalcopyrite, with pyrite becoming more prevalent further away from the hematite alteration zone. Copper mineralogy while modified in the oxide / supergene zone may show a primary vertical zonation as well, with the presence of primary chalcocite-covellite-bornite an important factor contributing to the high-grade nature of the mineralisation at Mt Oxide.</li> <li>▪ In detail, mineralisation predominantly occurs as cross-cutting veinlets and is best developed in areas of close-spaced, but not overlapping shear-controlled hematite alteration zones within carbonaceous shales. Copper mineralisation also occurs parallel to bedding predominantly in the stratigraphic domain.</li> <li>▪ Cobalt mineralisation, believed to occur mainly as the sulphide mineral cobaltite, occurs in association with copper sulphides and in some cases in cobalt-dominant areas with little copper present. Cobalt mineralisation predominantly occurs toward the top and periphery of the resource within the stratigraphic domain, probably representing a primary element zonation pattern within the deposit.</li> </ul> |

| Criteria  | JORC Code explanation  | Commentary   |
|---|--|--|
| <p><b>Drill hole information</b></p>  | <ul style="list-style-type: none"> <li>▪ A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:               <ul style="list-style-type: none"> <li>▪ easting and northing of the drill hole collar</li> <li>▪ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>▪ dip and azimuth of the hole</li> <li>▪ down hole length and interception depth</li> <li>▪ hole length.</li> </ul> </li> <li>▪ If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case</li> </ul> | <ul style="list-style-type: none"> <li>▪ For information on drillholes featured in the announcement refer to Table 3.</li> </ul>   |
| <p><b>Data aggregation methods</b></p>  | <ul style="list-style-type: none"> <li>▪ In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>▪ Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>▪ The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>  | <ul style="list-style-type: none"> <li>▪ Grade based composite intercepts were calculated using length weighted average of Cu grade. No high-grade cut was applied. The following composites are reported:               <ul style="list-style-type: none"> <li>▪ 0.5% Cu cutoff grade with up to 4 m internal dilution</li> <li>▪ 1.0% Cu cutoff grade with up to 2 m internal dilution</li> <li>▪ 3.0% Cu cutoff grade with up to 2 m internal dilution</li> </ul> </li> <li>▪ A single geological composite is reported for MOXD226A based on geological continuity of the mineralised interval</li> <li>▪ Downhole and estimated true widths have been reported.</li> <li>▪ Assays below standard detection limits were assigned half the value of the lower detection limit in the calculation of intercepts.</li> <li>▪ A full list of 0.5% Cu (4 m internal dilution), 1% Cu (2 m interval dilution) &amp; 3% Cu (2 m interval dilution) are provided in Table 2</li> </ul> |
| <p><b>Relationship between mineralisation, widths and intercept lengths</b></p> | <ul style="list-style-type: none"> <li>▪ These relationships are particularly important in the reporting of Exploration Results.</li> <li>▪ If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>▪ If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., down hole length, true width not known’).</li> <li>▪ Appropriate maps and sections</li> </ul>   | <ul style="list-style-type: none"> <li>▪ All holes are oriented to achieve unbiased sampling of the two orientations of mineralisation observed withing the Vero Resource. Due to the two orientations of mineralisation the reported intercepts are not perpendicular.</li> <li>▪ True widths have been calculated using the domain models from the previous resource estimation.</li> </ul>  |

| Criteria                                  | JORC Code explanation   | Commentary  |
|---|---|---|
| <b>Diagrams</b>                           | <ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>  | <ul style="list-style-type: none"> <li>Table 1 Table 2, Figure 3, Figure 4 &amp; Figure 5</li> </ul>  |
| <b>Balanced Reporting</b>                 | <ul style="list-style-type: none"> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>   | <ul style="list-style-type: none"> <li>Grade based composite intercepts were calculated using length weighted average of Cu grade. No high-grade cut was applied. The following composites are reported:             <ul style="list-style-type: none"> <li>0.5% Cu cutoff grade with up to 4 m internal dilution</li> <li>1.0% Cu cutoff grade with up to 2 m internal dilution</li> <li>3.0% Cu cutoff grade with up to 2 m internal dilution</li> </ul> </li> <li>A single geological composite is reported for MOXD226A based on geological continuity of the mineralised interval</li> <li>Downhole and estimated true widths have been reported.</li> <li>Assays below standard detection limits were assigned half the value of the lower detection limit in the calculation of intercepts.</li> <li>A full list of 0.5% Cu (4 m internal dilution), 1% Cu (2 m interval dilution) &amp; 3% Cu (2 m interval dilution) are provided in Table 2.</li> </ul> |
| <b>Other substantive exploration data</b> | <ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul> | <ul style="list-style-type: none"> <li>Refer to TNC ASX Announcement dated 28th February 2023 – Acquisition of True North Copper Assets</li> <li>Refer to TNC ASX Announcement dated 10th August 2023 TNC intersects 66.5m at 4.95% Cu in first drillhole at Vero Resource, Mt Oxide</li> <li>Refer to TNC ASX Announcement dated 20th September – TNC drilling returns up to 7.65% Cu, confirms large-scale high-grade copper, silver and cobalt mineralisation at Vero, QLD</li> <li>Refer to TNC ASX Announcement dated 23rd October - TNC intersects exceptional visual copper mineralisation at Vero, Mt Oxide</li> <li>Refer to TNC ASX Announcement dated 14 November - TNC hits two intersects of 26.20m @ 4.45% Cu and 46.60m @ 2.18% Cu, Vero Resource, Mt Oxide</li> </ul>   |
| <b>Further work</b>                       | <ul style="list-style-type: none"> <li>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</li> <li>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</li> </ul>                                       | <ul style="list-style-type: none"> <li>Future work includes:             <ul style="list-style-type: none"> <li>Metallurgical test work.</li> <li>Updates to the geological, mineralisation and structural interpretation using new and historic data.</li> <li>Targeting extensions to the Vero Resource along strike and at depth.</li> <li>Surface and drillhole exploration at other prospects within the EPM.</li> </ul> </li> </ul>   |