

5 September 2024

## Aurum hits 40m at 1.03 g/t gold at Boundiali BD Target 1

Aurum Resources Limited (ASX: AUE) (Aurum) is pleased to report further wide gold intercepts from step-back diamond drilling at **BD Target 1** as part of ongoing diamond drilling at its Boundiali Gold Project in Côte d'Ivoire, West Africa.

### Highlights

- Step-back diamond drilling (14 holes for 4,485m) at **BD Target 1** on the Boundiali **BD** tenement returns shallow, wide gold hits<sup>1</sup> including:
  - **40m @ 1.03 g/t Au** from 136m inc. **5m @ 1.70 g/t Au** (DSDD0076)
  - **11m @ 2.15 g/t Au** from 169m inc. **4m @ 4.14 g/t Au** &
  - **10m @ 2.02 g/t Au** from 322m inc. **2m @ 9.18 g/t Au** (DSDD0062)
- **Gold mineralisation remains open** at **BD Target 1**; along strike and down dip with mineralisation intersected down to 385m below surface
- **Induced Polarisation (IP) survey** (2.8km by 4.5km) completed at **BD Target 1** to optimise drill targeting
- **Actively drilling** at **BD Target 2** and Boundiali **BM** tenement; assay results expected soon
- Aurum is now utilising a second assay lab to improve assay turnaround time
- **Two more diamond rigs** (capable of drilling **900m** downhole) have arrived, increasing Aurum's fleet to **six**; drilling rate to reach ~10,000m per month (targeting **45,000m for CY2024**)
- **Initial Mineral Resource Estimate** for Boundiali targeted for late CY2024
- **Aurum is well-funded (~\$20M)** for continued aggressive exploration.

**Aurum's Managing Director Dr. Caigen Wang** said: *"We're delighted with another shallow, wide gold intercept at BD Target 1. Gold mineralisation remains open along strike and at depth, with intersects as deep as 385m below surface. Every hole we drill helps us understand the controls on the high-grade gold shoots we find within these wider intercepts.*

*The new IP survey and structural data are guiding our drill targeting. With two new NOCK1300 diamond drill rigs operational, we're eager to test BD Target 1 down to approximately 900m.*

*With six rigs on site, we expect to achieve ~10,000m drilling per month, systematically exploring the full potential of the 13km by 3km target zone at BD and our other tenements within the Boundiali gold project. We're also improving our operations with new vehicles, a centralised camp, and we are using a second laboratory to enhance efficiency and assay turnaround times.*

*We're well-funded with ~\$20 million cash at bank, allowing us to accelerate drilling and build on these encouraging results. We're targeting an inaugural JORC resource for Boundiali by late 2024."*

<sup>1</sup> Refer to Table 2 for full details of the significant assay results

### BD Target 1 - Latest Drill Results

Assay results reported in this release include 14 holes (4,485m) drilled at **BD Target 1**, which remains open with further drilling planned. More significant assay results for these holes<sup>2</sup> include:

- **40m @ 1.03 g/t Au** from 136m inc. **5m @ 1.70 g/t Au** (DSDD0076)
- **11m @ 2.15 g/t Au** from 169m inc. **4m @ 4.14 g/t Au** &
- **10m @ 2.02 g/t Au** from 322m inc. **2m @ 9.18 g/t Au** (DSDD0062)

These new results are in addition to diamond holes drilled by Aurum at **BD Target 1** and reported previously on 1 March 2024, 12 March 2024, 10 May 2024, 28 May 2024 and 17 June 2024, which include multiple +50 gold gram meter intervals over a 300m strike and down to an average depth of 200m (**Table 1**).

*Table 1: Significant Intersections BD Target 1 over 300m strike*

Hole ID	Sig Int > 0.2 g/t Au	Gold gram metres (m*g/t Au)	Section
DSDD0003	22m @ 1.98 g/t Au from 35m	44	1054550
DSDD0004	4m @ 22.35 g/t Au from 226m	<b>89</b>	105441500
DSDD0051	12.22m @ 14.56 g/t Au from 275m	<b>178</b>	
DSDD0076*	40m @ 1.03 g/t Au from 136m	41	
DSDD0010	59m @ 1.42 g/t Au from 68m	<b>84</b>	1054400
DSDD0050	90m @ 1.16 g/t Au from 143m	<b>104</b>	
DSDD0012	73m @ 2.15g/t Au from 172m	<b>157</b>	1054330
DSDD0049	23m @ 1.36 g/t Au from 293m	31	
	43m @ 0.96 g/t Au from 321m	41	
DSDD0011	36m @ 2.53 g/t Au from 104m	<b>91</b>	1054250
DSDD0060A	69m @ 1.05 g/t Au from 195m	<b>72</b>	

These shallow wide high-grade gold intercepts are predominately from the hanging wall lodes at **BD target 1** and true widths are estimated at about 70% - 80% of reported downhole lengths.

Details of drill collar location and assay results for the new drilling on **BD Target 1** are in **Table 2** and **Table 3** respectively. Plans showing Boundiali Gold Project location including assay results are presented in (Figure 1 to Figure 3). A cross section showing the latest drill results is presented in Figure 4 .

Gold mineralisation remains open along strike and at depth on all prospects, with drilling ongoing and further work being planned. Aurum has prioritized a number of IP defined targets to define additional high priority targets for drill testing within the 2.8km by 4.5km IP surveyed area but sitting outside of currently drilled gold prospects.

<sup>2</sup> Refer to Table 2 for full details of the assay results.

## BD Target 5 – Diamond Drilling

Aurum recently concluded a program of 13 holes for 2,444 metres at BD Target 5, which is located to the West of BD Target 2. This prospect had recently seen some aggressive artisanal diggings that attracted the interest of Aurum’s field exploration geologists.

Aurum’s field team designed a DD program to test the target which has a strike length of ~1,700m. Previous exploration drill results included **2m @ 3.42 g/t Au** from 37m (BNRC060) as well as gold-in-soil anomalism.

The latest round of drilling did not repeat that tenor hitting a best intercept of 1.00m @ 0.93 g/t Au from 55m (DSDD0073). Further work may be planned once the results are analysed. Details of drill collar location and assay results for the new drilling on BD Target 5 are in **Table 2** and **Table 3** respectively. Plans showing Boundiali Gold Project location of drilling is presented in (Figure 1 to Figure 3).

## Next steps

Aurum will continue its high-tempo gold exploration drilling at the Boundiali Gold Project, with ongoing scout and step-back diamond drilling at the **BD** tenement aimed at further delineating the extent of gold mineralisation and identifying new targets with the aid of the newly completed IP survey.

Exploration drilling at the early-stage **BM** tenement will also continue to test for potential new discoveries.

Utilising a second assay laboratory based in Côte d'Ivoire should improve on the assay turnaround time and reduce the existing backlog of assays that the company is waiting on.

With six of its own diamond drill rigs soon in operation, Aurum is targeting a drilling rate of ~10,000m per month and expect to drill more than 45,000m of diamond core at Boundiali this year. This increased drilling capacity will significantly contribute to Aurum’s goal of delivering an inaugural Mineral Resource Estimate by the end of CY2024.

Aurum is well-funded to accelerate exploration drilling at Boundiali with ~\$20M cash at bank, and is confident in the potential of the Boundiali Gold Project to deliver value for its shareholders.

This update has been authorised by the Board of Aurum Resources Limited.

ENDS

## FORWARD-LOOKING STATEMENTS

*This ASX release contains forward-looking statements about Aurum Resources Limited's exploration activities, drilling programs, and potential Mineral Resource Estimate at the Boundiali Gold Project. These statements are based on current expectations and are subject to risks and uncertainties inherent in mineral exploration and mining. Factors that could cause actual results to differ materially include exploration risks, drilling results, resource estimation, gold prices, operational risks, regulatory changes, and broader economic conditions. Investors should not place undue reliance on these forward-looking statements.*

## COMPETENT PERSONS STATEMENT

*The information in this release that relates to Exploration Targets and Exploration Results is based on information compiled by Mr Mark Strizek, a Competent Person who is a Member of The Australasian Institute of Mining and Metallurgy. Mr Strizek has been a non-executive*

Director of the Company since 1 February 2024 and joined as an executive Director on 1 June 2024. Mr Strizek has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Strizek consents to the inclusion in the announcement of the matters based on his information in the form and context in which it appears. Additionally, Mr Strizek confirms that the entity is not aware of any new information or data that materially affects the information contained in the ASX releases referred to in this presentation.

## COMPLIANCE STATEMENT

This report contains information extracted from ASX market announcements reported in accordance with the 2012 edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" ("2012 JORC Code") and available for viewing at [www.asx.com](http://www.asx.com) and includes results reported previously and published on ASX platform:

03 Sep 2024, Boundiali South Exploration Licence Renewed (ASX:AUE)  
 07 Aug 2024, Aurum to advance met studies for Boundiali Gold Project (ASX:AUE)  
 22 July 2024, Prelim metallurgical tests deliver up to 99% gold recovery (ASX:AUE)  
 17 June 2024, Aurum hits 69m at 1.05 g/t gold at Boundiali BD Target 1 (ASX:AUE)  
 28 May 2024, AUE hits 163 g/t gold in 12m @ 14.56 g/t gold at BD Target 1 (ASX:AUE)  
 24 May 2024, Aurum hits 74m @ 1.0 g/t gold at Boundiali BD Target 2 (ASX:AUE)  
 15 May 2024, Aurum expands Boundiali Gold Project footprint (ASX:AUE)  
 10 May 2024, AUE hits 90m @ 1.16 g/t gold at Boundiali BD Target 1 (ASX:AUE)  
 01 May 2024, Aurum Appoints Country Manager in Cote d'Ivoire (ASX:AUE)  
 23 April 2024, AUE drilling hits up to 45 g/t gold at Boundiali BD Target 2 (ASX:AUE)  
 19 March 2024, AUE signs binding term sheet for 100% of Boundiali South (ASX:AUE)  
 12 March 2024, AUE hits 73m at 2.15g/t incl 1m at 72g/t gold at Boundiali (ASX:AUE)  
 01 March 2024, Aurum hits 4m at 22 g/t gold in Boundiali diamond drilling (ASX:AUE)  
 22 January 2024, Aurum hits shallow, wide gold intercepts at Boundiali, Côte d'Ivoire (ASX: AUE)  
 21 December 2023, Rapid Drilling at Boundiali Gold Project (ASX:AUE)  
 21 November 2023, AUE Acquisition Presentation (ASX:AUE)  
 21 June 2021, Notice of General Meeting/Proxy Form (MSR.ASX)  
 21 May 2021, PlusOr to Acquire 6194 sq kms Ground Position in Cote d'Ivoire (MSR.ASX)  
 22 August 2019, Boundiali RC Drill Results Continue to Impress (PDI.ASX)  
 15 July 2019, RC, Trench Results Grow Boundiali Potential In Cote D'Ivoire (PDI.ASX)  
 27 May 2019, New Drill Results Strengthen Boundiali Project Cote D'Ivoire (PDI.ASX)  
 16 January 2019, PDI-Toro JV Sharpens Focus with Major Drilling Program (PDI.ASX)  
 26 November 2018, Boundiali North - Large Coherent Gold Anomalies in 14km Zone (PDI.ASX)

The Company confirms that it is not aware of any new information or data that materially affects the information included in the previous announcements.

For personal use only

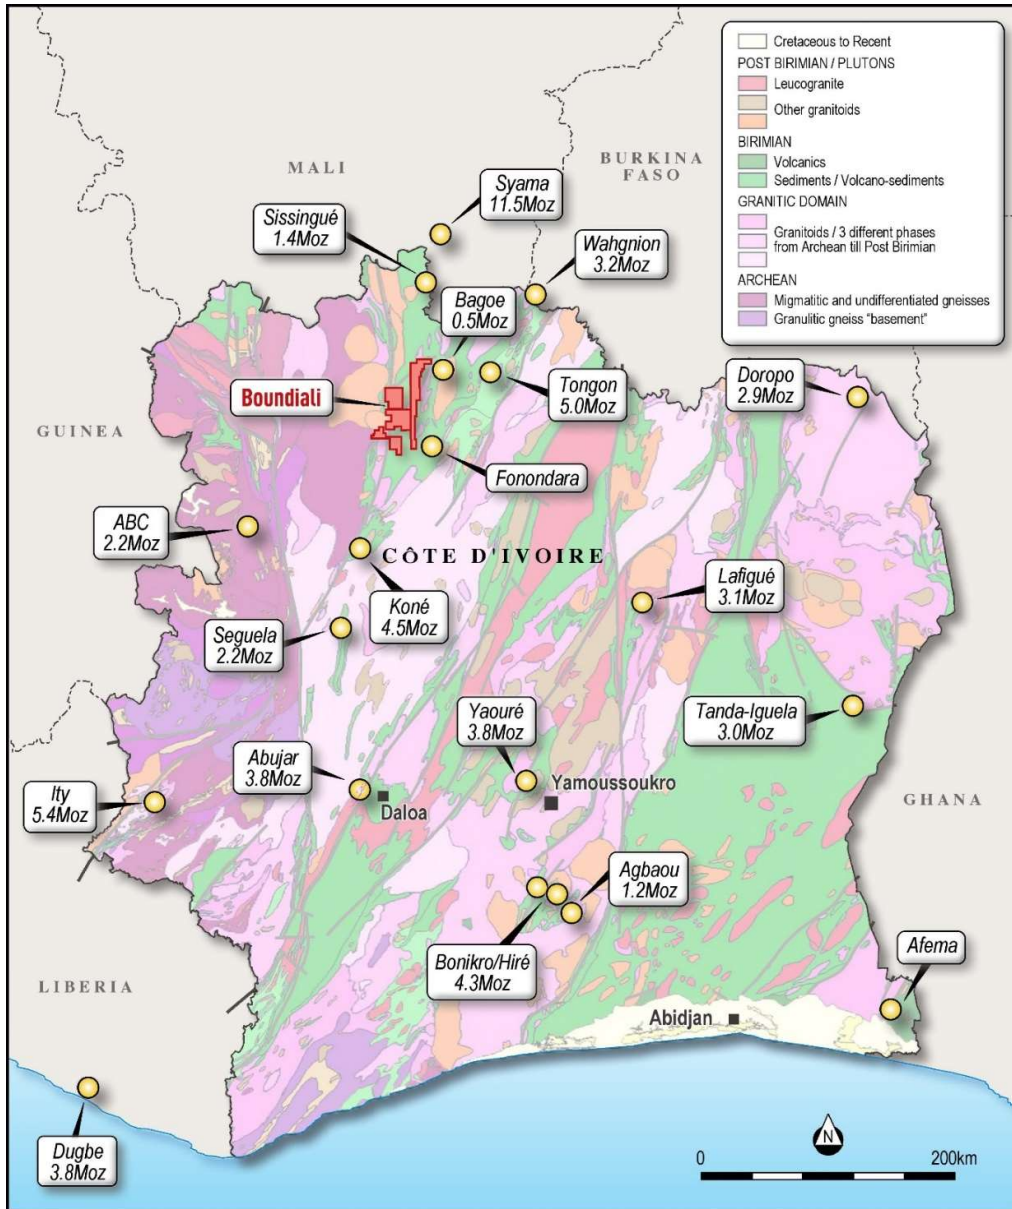


Figure 1: Location of Aurum's Boundiali Gold Project in Côte d'Ivoire



For personal use only

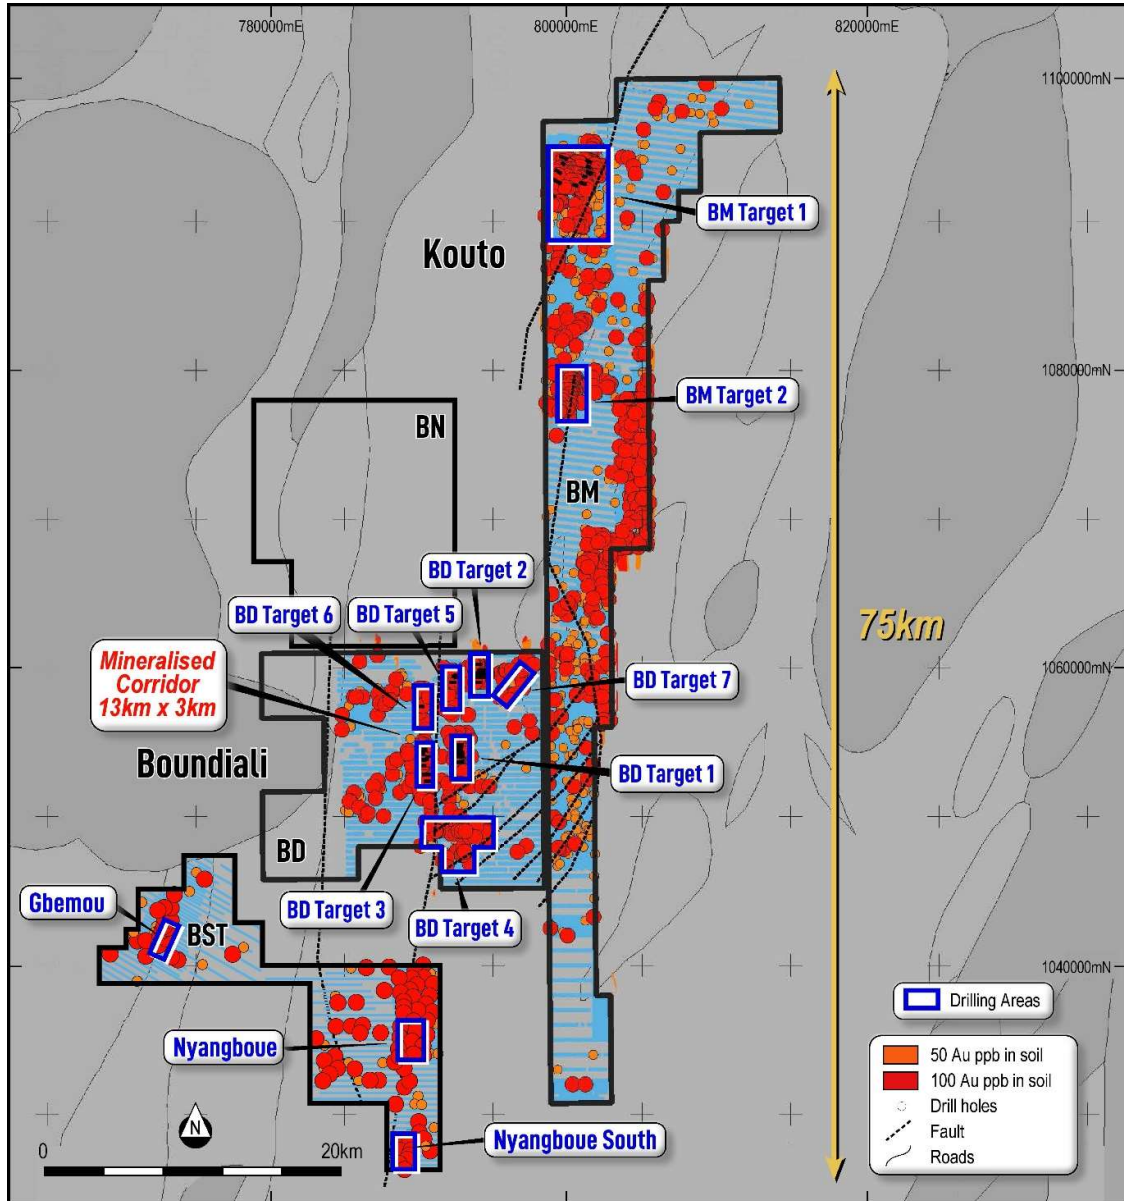


Figure 2: Aurum's Boundiali Gold Project

For personal use only

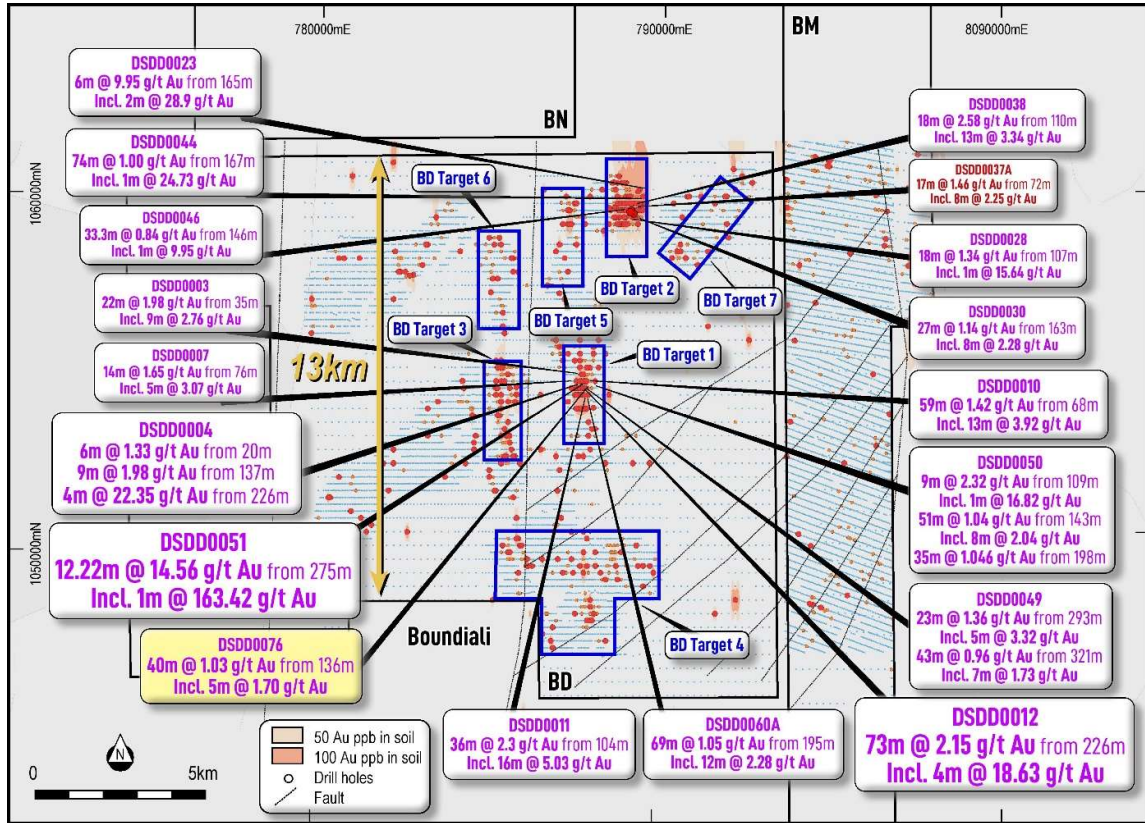


Figure 3: BD tenement has diamond drilling at four gold targets (1-3 & 5) and shows new significant drilling results (yellow)

For personal use only

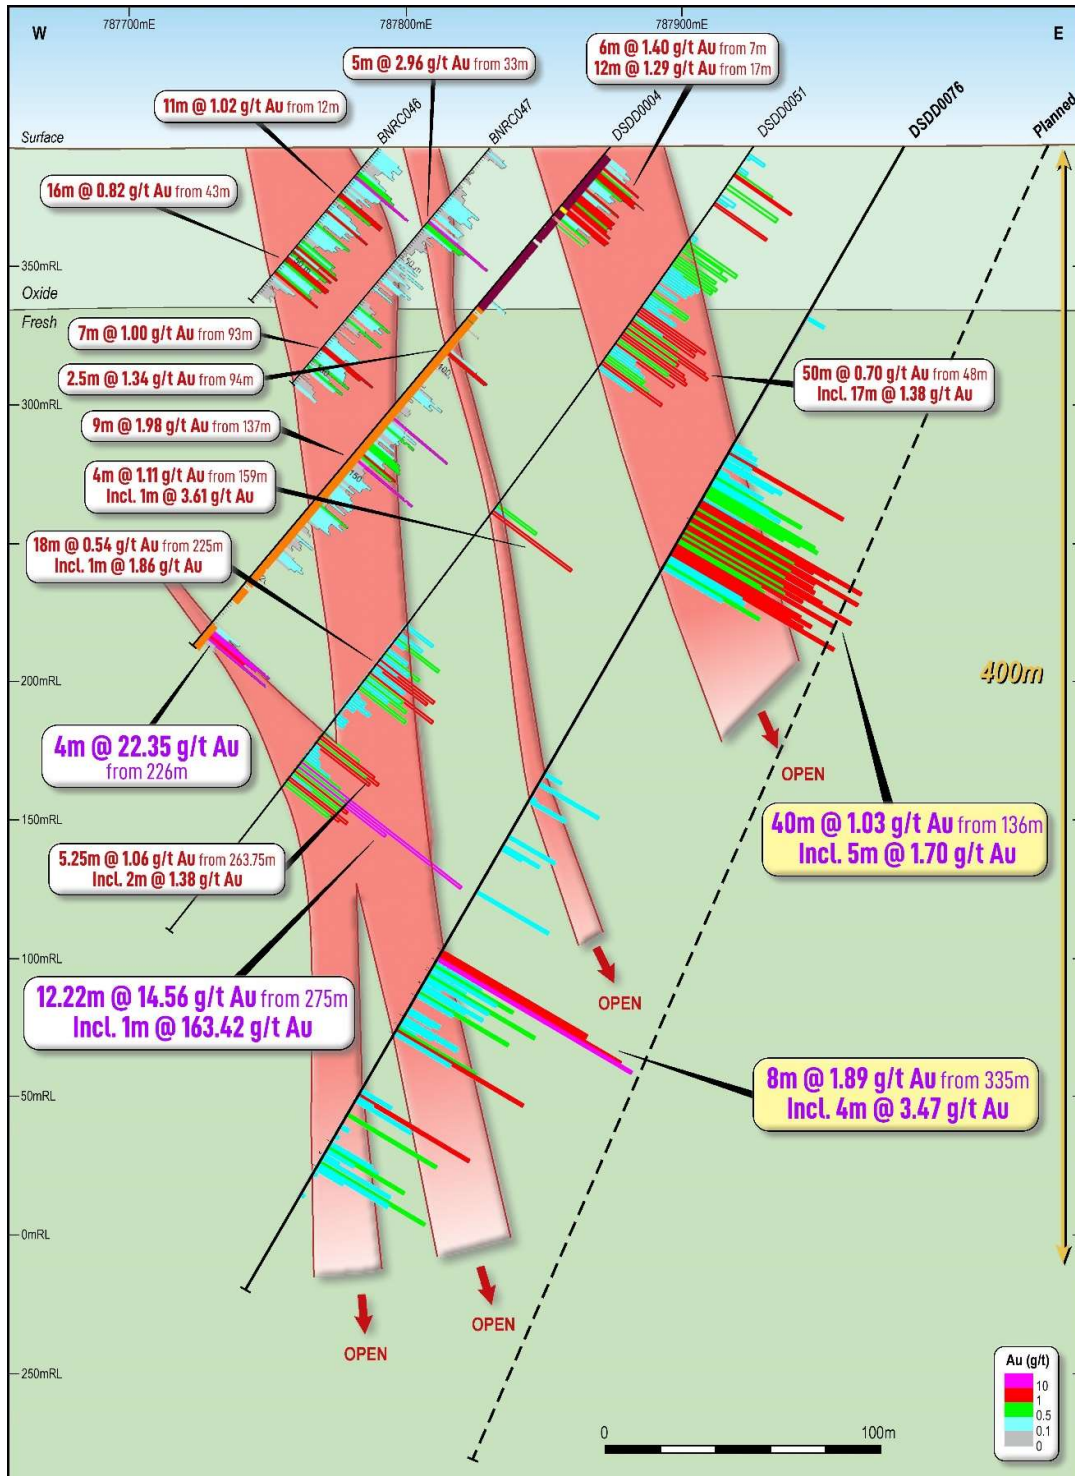


Figure 4: Section 1054500 (+/-25m) showing previous drilling (white) – BD Target 1



Table 2: Drill Collar Information

Hole ID	UTM East	UTM North	Depth (m)	Dip deg	Azi deg	Prospect	Type
DSDD0062	787,925	1,054,425	412.5	-63	261	BD Target 1	DD
DSDD0066	787,958	1,054,339	555.0	-64.5	256.5	BD Target 1	DD
DSDD0071	787,914	1,054,189	435.5	-63	261	BD Target 1	DD
DSDD0075	787,829	1,054,584	186.0	-50	270	BD Target 1	DD
DSDD0076	787,979	1,054,495	479.0	-60	270	BD Target 1	DD
DSDD0077	787,839	1,054,675	201.0	-50	270	BD Target 1	DD
DSDD0078	787,841	1,054,774	201.0	-50	270	BD Target 1	DD
DSDD0080	787,942	1,054,777	312.0	-50	270	BD Target 1	DD
DSDD0082	787,945	1,054,889	267.0	-50	270	BD Target 1	DD
DSDD0084	787,874	1,054,130	377.5	-50	270	BD Target 1	DD
DSDD0086 <sup>3</sup>	787,945	1,055,036	52.0 <sup>4</sup>	-50	270	BD Target 1	DD
DSDD0086A	787,947	1,055,037	261.0	-50	270	BD Target 1	DD
DSDD0089	787,949	1,054,588	324.0	-50	270	BD Target 1	DD
DSDD0096	787,949	1,054,264	421.5	-60	270	BD Target 1	DD
<b>14 holes</b>			<b>4,485m</b>			BD Target 5	DD
							DD
DSDD0067 <sup>3</sup>	787,575	1,059,536	174.0	-55	270	BD Target 5	DD
DSDD0068	787,678	1,059,539	216.5	-55	270	BD Target 5	DD
DSDD0069 <sup>3</sup>	787,591	1,059,399	181.5	-55	270	BD Target 5	DD
DSDD0070 <sup>3</sup>	787,775	1,058,692	185.5	-55	270	BD Target 5	DD
DSDD0072A <sup>3</sup>	787,875	1,058,696	254.5	-55	270	BD Target 5	DD
DSDD0073	788,390	1,058,282	159.0	-55	270	BD Target 5	DD
DSDD0079 <sup>3</sup>	788,439	1,058,281	268.5	-55	270	BD Target 5	DD
DSDD0081 <sup>3</sup>	788,339	1,058,128	157.0	-60	270	BD Target 5	DD
DSDD0083 <sup>3</sup>	788,398	1,058,126	150.5	-55	270	BD Target 5	DD
DSDD0085A	788,311	1,057,958	157.5	-55	270	BD Target 5	DD
DSDD0087	788,384	1,057,846	203.5	-55	270	BD Target 5	DD
DSDD0090 <sup>3</sup>	788,353	1,058,397	177.0	-55	270	BD Target 5	DD
DSDD0091 <sup>3</sup>	788,383	1,057,956	159.0	-55	270	BD Target 5	DD
<b>13 holes</b>			<b>2,444m</b>			BD Target 5	DD
<b>27 holes</b>			<b>6,929m</b>			<b>TOTAL</b>	DD

<sup>3</sup> NSI

<sup>4</sup> Abandoned

For personal use only

**Table 3: Significant assay results for holes being reported<sup>5</sup>**

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0062	1.00	2.00	1.00	0.10			
DSDD0062	3.00	4.50	1.50	0.12			
DSDD0062	14.50	15.25	0.75	0.12			
DSDD0062	16.50	18.00	1.50	0.95	1.50 m @ 0.95 g/t Au	1.4	
DSDD0062	22.05	22.97	0.92	0.32			
DSDD0062	24.00	25.50	1.50	0.38			
DSDD0062	25.50	26.50	1.00	<b>1.21</b>	2.50 m @ 0.71 g/t Au	1.8	1.00 m @ 1.21 g/t Au
DSDD0062	26.50	27.43	0.93	0.10			
DSDD0062	30.00	31.50	1.50	0.16			
DSDD0062	34.50	35.00	0.50	0.10			
DSDD0062	35.00	36.00	1.00	0.29	1.00 m @ 0.29 g/t Au	0.3	
DSDD0062	36.00	37.50	1.50	0.10			
DSDD0062	49.50	51.00	1.50	0.41	1.50 m @ 0.41 g/t Au	0.6	
DSDD0062	58.00	59.00	1.00	0.13			
DSDD0062	61.00	62.00	1.00	0.12			
DSDD0062	74.00	75.00	1.00	0.14			
DSDD0062	78.00	79.00	1.00	0.32	1.00 m @ 0.32 g/t Au	0.3	
DSDD0062	95.00	96.00	1.00	0.10			
DSDD0062	98.00	99.00	1.00	0.14			
DSDD0062	99.00	100.00	1.00	0.25			
DSDD0062	100.00	101.00	1.00	0.01			
DSDD0062	101.00	102.00	1.00	0.01			
DSDD0062	102.00	103.00	1.00	0.21	7.00 m @ 0.21 g/t Au	1.5	
DSDD0062	103.00	104.00	1.00	0.04			
DSDD0062	104.00	105.00	1.00	0.06			
DSDD0062	105.00	106.00	1.00	0.90			
DSDD0062	106.00	107.00	1.00	0.11			
DSDD0062	107.00	108.00	1.00	0.16			
DSDD0062	113.00	114.00	1.00	0.13			
DSDD0062	114.00	115.00	1.00	0.10			
DSDD0062	115.00	116.00	1.00	0.11			
DSDD0062	117.00	118.00	1.00	0.11			
DSDD0062	118.00	119.00	1.00	0.48	1.00 m @ 0.48 g/t Au	0.5	
DSDD0062	126.00	127.00	1.00	0.37			
DSDD0062	127.00	128.00	1.00	0.53	2.00 m @ 0.45 g/t Au	0.9	
DSDD0062	128.00	129.00	1.00	0.11			
DSDD0062	131.00	132.00	1.00	0.24	9.00 m @ 0.57 g/t Au	<b>5.2</b>	

<sup>5</sup> 0.2 g/t Au cut off used with 3m internal dilution and no top cut applied

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0062	132.00	133.00	1.00	0.23			
DSDD0062	133.00	134.00	1.00	0.07			
DSDD0062	134.00	135.00	1.00	0.09			
DSDD0062	135.00	136.00	1.00	0.85			
DSDD0062	136.00	137.00	1.00	0.46			
DSDD0062	137.00	138.00	1.00	0.55			
DSDD0062	138.00	139.00	1.00	<b>1.17</b>			2.00 m @ 1.33 g/t Au
DSDD0062	139.00	140.00	1.00	<b>1.50</b>			
DSDD0062	140.00	141.00	1.00	0.13			
DSDD0062	142.00	143.00	1.00	0.13			
DSDD0062	143.00	144.00	1.00	0.12			
DSDD0062	167.00	168.00	1.00	0.16			
DSDD0062	169.00	170.00	1.00	0.87			
DSDD0062	170.00	171.00	1.00	<b>1.11</b>			3.00 m @ 1.61 g/t Au
DSDD0062	171.00	172.00	1.00	<b>2.72</b>			
DSDD0062	172.00	173.00	1.00	<b>1.00</b>			
DSDD0062	173.00	174.00	1.00	0.23			
DSDD0062	174.00	175.00	1.00	<b>1.90</b>	11.00 m @ 2.15 g/t Au	<b>23.7</b>	4.00 m @ 4.14 g/t Au
DSDD0062	175.00	176.00	1.00	<b>11.82</b>			
DSDD0062	176.00	177.00	1.00	<b>1.40</b>			
DSDD0062	177.00	178.00	1.00	<b>1.43</b>			
DSDD0062	178.00	179.00	1.00	0.28			
DSDD0062	179.00	180.00	1.00	0.92			
DSDD0062	186.00	187.00	1.00	0.35			
DSDD0062	187.00	188.00	1.00	0.19			
DSDD0062	188.00	189.00	1.00	0.15			
DSDD0062	189.00	190.00	1.00	0.62	7.00 m @ 0.41 g/t Au	2.9	
DSDD0062	190.00	191.00	1.00	0.39			
DSDD0062	191.00	192.00	1.00	0.98			
DSDD0062	192.00	193.00	1.00	0.22			
DSDD0062	194.00	195.00	1.00	0.16			
DSDD0062	201.00	202.00	1.00	<b>1.09</b>			1.00 m @ 1.09 g/t Au
DSDD0062	202.00	203.00	1.00	0.01	3.00 m @ 0.43 g/t Au	1.3	
DSDD0062	203.00	204.00	1.00	0.21			
DSDD0062	212.00	213.00	1.00	0.17			
DSDD0062	239.00	240.00	1.00	0.17			
DSDD0062	240.00	241.00	1.00	0.12			
DSDD0062	246.00	247.00	1.00	0.37			
DSDD0062	247.00	248.00	1.00	0.03			
DSDD0062	248.00	249.00	1.00	0.45	5.00 m @ 0.32 g/t Au	1.6	
DSDD0062	249.00	250.00	1.00	0.24			
DSDD0062	250.00	251.00	1.00	0.50			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0062	252.00	253.00	1.00	0.11			
DSDD0062	253.00	254.00	1.00	0.34	6.00 m @ 0.25 g/t Au	1.5	
DSDD0062	254.00	255.00	1.00	0.08			
DSDD0062	255.00	256.00	1.00	0.05			
DSDD0062	256.00	257.00	1.00	0.12			
DSDD0062	257.00	258.00	1.00	0.58			
DSDD0062	258.00	259.00	1.00	0.35			
DSDD0062	265.00	266.00	1.00	0.12			
DSDD0062	266.00	267.00	1.00	0.10			
DSDD0062	271.00	272.00	1.00	0.22	1.00 m @ 0.22 g/t Au	0.2	
DSDD0062	276.00	277.00	1.00	0.26	1.00 m @ 0.26 g/t Au	0.3	
DSDD0062	277.00	278.00	1.00	0.14			
DSDD0062	278.00	279.00	1.00	0.16			
DSDD0062	279.00	280.00	1.00	0.13			
DSDD0062	280.00	281.00	1.00	0.21	1.00 m @ 0.21 g/t Au	0.2	
DSDD0062	284.00	285.00	1.00	0.22	1.00 m @ 0.22 g/t Au	0.2	
DSDD0062	305.00	306.00	1.00	0.13			
DSDD0062	306.00	307.00	1.00	0.13			
DSDD0062	307.00	308.00	1.00	0.12			
DSDD0062	308.00	308.80	0.80	0.10			
DSDD0062	308.80	310.10	1.30	<b>1.55</b>	1.30 m @ 1.55 g/t Au	2.0	1.30 m @ 1.55 g/t Au
DSDD0062	310.50	311.00	0.50	<b>3.69</b>	10.50 m @ 0.82 g/t Au	<b>8.7</b>	
DSDD0062	311.00	312.00	1.00	0.50			
DSDD0062	312.00	313.00	1.00	0.47			
DSDD0062	313.00	314.00	1.00	0.40			
DSDD0062	314.00	315.00	1.00	0.71			
DSDD0062	315.00	316.00	1.00	0.44			
DSDD0062	316.00	317.00	1.00	0.24			
DSDD0062	317.00	318.00	1.00	0.59			
DSDD0062	318.00	319.00	1.00	<b>2.29</b>			
DSDD0062	319.00	320.00	1.00	0.52			
DSDD0062	320.00	321.00	1.00	0.65			1.00 m @ 2.29 g/t Au
DSDD0062	321.00	322.00	1.00	0.13			
DSDD0062	322.00	323.00	1.00	<b>17.05</b>	10.00 m @ 2.02 g/t Au	<b>20.2</b>	2.00 m @ 9.18 g/t Au
DSDD0062	323.00	324.00	1.00	<b>1.31</b>			
DSDD0062	324.00	325.00	1.00	0.14			
DSDD0062	325.00	326.00	1.00	0.09			
DSDD0062	326.00	327.00	1.00	0.43			
DSDD0062	327.00	328.00	1.00	0.40			
DSDD0062	328.00	329.00	1.00	0.10			
DSDD0062	329.00	330.00	1.00	0.03			
DSDD0062	330.00	331.00	1.00	0.24			

For personal use only



Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0062	331.00	332.00	1.00	0.38			
DSDD0062	333.00	334.00	1.00	0.10			
DSDD0062	349.00	350.00	1.00	0.16			
DSDD0062	354.00	355.00	1.00	0.42			
DSDD0062	355.00	356.00	1.00	0.34	4.00 m @ 0.67 g/t Au	2.7	
DSDD0062	356.00	357.00	1.00	<b>1.28</b>			1.00 m @ 1.28 g/t Au
DSDD0062	357.00	358.00	1.00	0.62			
DSDD0062	359.00	360.00	1.00	0.16			
DSDD0062	360.00	361.00	1.00	0.19			
DSDD0062	361.00	362.00	1.00	0.11			
DSDD0062	362.00	363.00	1.00	0.10			
DSDD0062	363.00	364.00	1.00	0.16			
DSDD0062	364.00	365.00	1.00	0.48	7.00 m @ 0.64 g/t Au	4.5	
DSDD0062	365.00	366.00	1.00	0.22			
DSDD0062	366.00	367.00	1.00	0.26			
DSDD0062	367.00	368.00	1.00	<b>1.58</b>			1.00 m @ 1.58 g/t Au
DSDD0062	368.00	369.00	1.00	0.74			
DSDD0062	369.00	370.00	1.00	0.94			
DSDD0062	370.00	371.00	1.00	0.26			
DSDD0062	371.00	372.00	1.00	0.17			
DSDD0062	372.00	373.00	1.00	0.10			
DSDD0066	195.00	196.00	1.00	0.11			
DSDD0066	206.00	207.00	1.00	0.13			
DSDD0066	236.36	237.00	0.64	0.12			
DSDD0066	247.00	248.00	1.00	0.13			
DSDD0066	265.00	266.00	1.00	0.13			
DSDD0066	270.00	271.00	1.00	0.11			
DSDD0066	278.31	279.00	0.69	0.11			
DSDD0066	279.00	280.00	1.00	0.10			
DSDD0066	280.00	281.00	1.00	0.25	6.00 m @ 0.51 g/t Au	3.0	
DSDD0066	281.00	282.00	1.00	0.01			
DSDD0066	282.00	283.00	1.00	0.25			
DSDD0066	283.00	284.00	1.00	<b>1.89</b>			1.00 m @ 1.89 g/t Au
DSDD0066	284.00	285.00	1.00	0.03			
DSDD0066	285.00	286.00	1.00	0.62			
DSDD0066	331.00	332.00	1.00	0.25	1.00 m @ 0.25 g/t Au	0.3	
DSDD0066	332.00	333.00	1.00	0.10			
DSDD0066	333.00	334.00	1.00	0.60	7.00 m @ 0.29 g/t Au	2.1	
DSDD0066	334.00	335.00	1.00	0.18			
DSDD0066	335.00	336.00	1.00	0.16			
DSDD0066	336.00	337.00	1.00	0.18			
DSDD0066	337.00	338.00	1.00	0.17			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0066	338.00	339.00	1.00	0.48			
DSDD0066	339.00	340.00	1.00	0.29			
DSDD0066	340.00	341.00	1.00	0.18			
DSDD0066	341.00	342.00	1.00	0.40			
DSDD0066	342.00	343.00	1.00	<b>1.06</b>			1.00 m @ 1.06 g/t Au
DSDD0066	343.00	344.00	1.00	0.19			
DSDD0066	344.00	345.00	1.00	0.39			
DSDD0066	345.00	346.00	1.00	0.88			
DSDD0066	346.00	347.00	1.00	0.22			
DSDD0066	347.00	348.00	1.00	0.56			
DSDD0066	348.00	349.00	1.00	<b>5.30</b>	14.00 m @ 0.74 g/t Au	<b>10.3</b>	1.00 m @ 5.30 g/t Au
DSDD0066	349.00	350.00	1.00	0.38			
DSDD0066	350.00	351.00	1.00	0.08			
DSDD0066	351.00	352.00	1.00	0.12			
DSDD0066	352.00	353.00	1.00	0.10			
DSDD0066	353.00	354.00	1.00	0.27			
DSDD0066	354.00	355.00	1.00	0.37			
DSDD0066	357.00	358.00	1.00	0.25			
DSDD0066	358.00	359.00	1.00	0.24			
DSDD0066	359.00	360.00	1.00	0.17			
DSDD0066	360.00	361.00	1.00	0.30			
DSDD0066	361.00	362.00	1.00	0.59			
DSDD0066	362.00	363.00	1.00	0.93	12.00 m @ 0.32 g/t Au	3.9	
DSDD0066	363.00	364.00	1.00	0.17			
DSDD0066	364.00	365.00	1.00	0.38			
DSDD0066	365.00	366.00	1.00	0.22			
DSDD0066	366.00	367.00	1.00	0.18			
DSDD0066	367.00	368.00	1.00	0.13			
DSDD0066	368.00	369.00	1.00	0.30			
DSDD0066	369.00	370.00	1.00	0.14			
DSDD0066	377.00	378.00	1.00	0.17			
DSDD0066	378.00	379.00	1.00	0.23			
DSDD0066	379.00	380.00	1.00	0.09			
DSDD0066	380.00	381.00	1.00	0.48			
DSDD0066	381.00	382.00	1.00	0.79			
DSDD0066	382.00	383.00	1.00	0.35			
DSDD0066	383.00	384.00	1.00	0.83	18.00 m @ 0.58 g/t Au	<b>10.5</b>	
DSDD0066	384.00	385.00	1.00	0.30			
DSDD0066	385.00	386.00	1.00	0.21			
DSDD0066	386.00	387.00	1.00	0.59			
DSDD0066	387.00	388.00	1.00	0.37			
DSDD0066	388.00	389.00	1.00	<b>1.87</b>			1.00 m @ 1.87 g/t Au

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0066	389.00	390.00	1.00	0.36			
DSDD0066	390.00	391.00	1.00	0.19			
DSDD0066	391.00	392.00	1.00	0.16			
DSDD0066	392.00	393.00	1.00	<b>1.40</b>			2.00 m @ 1.31 g/t Au
DSDD0066	393.00	394.00	1.00	<b>1.22</b>			
DSDD0066	394.00	395.00	1.00	0.75			
DSDD0066	395.00	396.00	1.00	0.27			
DSDD0066	397.00	398.00	1.00	0.10			
DSDD0066	398.00	399.00	1.00	0.20			
DSDD0066	399.00	400.00	1.00	0.23			
DSDD0066	400.00	401.00	1.00	0.53			
DSDD0066	401.00	402.00	1.00	0.39			
DSDD0066	402.00	403.00	1.00	0.28			
DSDD0066	403.00	404.00	1.00	0.20			
DSDD0066	404.00	405.00	1.00	0.17			
DSDD0066	405.00	406.00	1.00	0.44			
DSDD0066	406.00	407.00	1.00	0.37			
DSDD0066	407.00	408.00	1.00	0.14			
DSDD0066	408.00	409.00	1.00	0.18			
DSDD0066	409.00	410.00	1.00	0.52	23.00 m @ 0.40 g/t Au	9.2	
DSDD0066	410.00	411.00	1.00	0.59			
DSDD0066	411.00	412.00	1.00	0.23			
DSDD0066	412.00	413.00	1.00	0.76			
DSDD0066	413.00	414.00	1.00	0.60			
DSDD0066	414.00	415.00	1.00	0.20			
DSDD0066	415.00	416.00	1.00	0.36			
DSDD0066	416.00	417.00	1.00	0.28			
DSDD0066	417.00	418.00	1.00	0.35			
DSDD0066	418.00	419.00	1.00	0.41			
DSDD0066	419.00	420.00	1.00	<b>1.06</b>			1.00 m @ 1.06 g/t Au
DSDD0066	420.00	421.00	1.00	0.67			
DSDD0066	435.00	436.00	1.00	0.14			
DSDD0066	436.00	437.00	1.00	0.58	2.00 m @ 0.43 g/t Au	0.9	
DSDD0066	437.00	438.00	1.00	0.28			
DSDD0066	443.00	444.00	1.00	0.27	2.00 m @ 0.34 g/t Au	0.7	
DSDD0066	444.00	445.00	1.00	0.42			
DSDD0066	451.65	452.28	0.63	0.11			
DSDD0066	464.50	465.50	1.00	0.19			
DSDD0066	473.90	475.00	1.10	0.24	1.10 m @ 0.24 g/t Au	0.3	
DSDD0066	506.00	507.00	1.00	0.10			
DSDD0066	548.00	549.00	1.00	0.11			
DSDD0068	5.00	6.00	1.00	0.10			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0068	15.00	16.00	1.00	0.12			
DSDD0068	62.00	63.00	1.00	0.10			
DSDD0068	161.00	162.00	1.00	0.23	1.00 m @ 0.23 g/t Au	0.2	
DSDD0068	211.00	212.00	1.00	0.12			
DSDD0069	164.50	165.50	1.00	0.10			
DSDD0071	140.00	141.00	1.00	0.12			
DSDD0071	142.00	143.00	1.00	0.15			
DSDD0071	148.00	149.00	1.00	0.12			
DSDD0071	150.00	151.00	1.00	0.10			
DSDD0071	153.00	154.00	1.00	0.10			
DSDD0071	258.31	259.50	1.19	0.10			
DSDD0071	259.50	260.50	1.00	0.42			
DSDD0071	260.50	261.50	1.00	0.11	4.00 m @ 0.24 g/t Au	1.0	
DSDD0071	261.50	262.50	1.00	0.15			
DSDD0071	262.50	263.50	1.00	0.30			
DSDD0071	267.50	268.50	1.00	0.18			
DSDD0071	269.50	270.50	1.00	0.10			
DSDD0071	270.50	271.50	1.00	0.13			
DSDD0071	271.50	272.50	1.00	<b>1.42</b>	1.00 m @ 1.42 g/t Au	1.4	1.00 m @ 1.42 g/t Au
DSDD0071	272.50	273.50	1.00	0.11			
DSDD0071	279.50	280.50	1.00	0.21	1.00 m @ 0.21 g/t Au	0.2	
DSDD0071	280.50	281.50	1.00	0.12			
DSDD0071	285.50	286.50	1.00	0.20	2.00 m @ 0.22 g/t Au	0.4	
DSDD0071	286.50	287.50	1.00	0.24			
DSDD0071	291.00	291.50	0.50	0.18			
DSDD0071	291.50	292.50	1.00	0.36			
DSDD0071	292.50	293.50	1.00	<b>1.68</b>	4.00 m @ 0.96 g/t Au	3.9	2.00 m @ 1.41 g/t Au
DSDD0071	293.50	294.50	1.00	<b>1.13</b>			
DSDD0071	294.50	295.50	1.00	0.69			
DSDD0071	301.50	302.50	1.00	0.63	1.00 m @ 0.63 g/t Au	0.6	
DSDD0071	303.50	304.50	1.00	0.12			
DSDD0071	304.50	305.50	1.00	0.17			
DSDD0071	381.00	382.00	1.00	0.11			
DSDD0071	382.00	383.00	1.00	0.13			
DSDD0071	398.00	399.00	1.00	0.15			
DSDD0071	400.00	401.00	1.00	0.23	1.00 m @ 0.23 g/t Au	0.2	
DSDD0071	403.83	404.53	0.70	0.20			
DSDD0071	421.50	422.60	1.10	0.10			
DSDD0073	18.00	18.96	0.96	0.11			
DSDD0073	19.50	20.50	1.00	0.20	1.00 m @ 0.20 g/t Au	0.2	
DSDD0073	30.00	31.00	1.00	0.13			
DSDD0073	37.00	38.00	1.00	0.18			

For personal use only



Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0073	39.00	40.00	1.00	0.51	1.00 m @ 0.51 g/t Au	0.5	
DSDD0073	55.00	56.00	1.00	0.93	1.00 m @ 0.93 g/t Au	0.9	
DSDD0073	138.80	139.96	1.16	0.18			
DSDD0075	3.93	4.50	0.57	0.10			
DSDD0075	6.00	7.00	1.00	0.11			
DSDD0075	18.00	18.86	0.86	0.14			
DSDD0075	21.00	22.01	1.01	0.18			
DSDD0075	22.90	24.00	1.10	0.25	1.10 m @ 0.25 g/t Au	0.3	
DSDD0075	37.00	38.11	1.11	0.31	1.11 m @ 0.31 g/t Au	0.3	
DSDD0075	39.00	40.00	1.00	0.13			
DSDD0075	44.00	45.00	1.00	0.38	3.38 m @ 0.46 g/t Au	1.5	
DSDD0075	45.00	46.00	1.00	0.75			
DSDD0075	46.00	47.38	1.38	0.30			
DSDD0075	48.00	49.50	1.50	0.25	9.00 m @ 0.27 g/t Au	2.4	
DSDD0075	49.50	51.00	1.50	0.17			
DSDD0075	51.00	52.50	1.50	0.71			
DSDD0075	52.50	54.00	1.50	0.28			
DSDD0075	54.00	55.00	1.00	0.01			
DSDD0075	55.00	56.00	1.00	0.07			
DSDD0075	56.00	57.00	1.00	0.20			
DSDD0075	58.00	59.00	1.00	0.51	3.00 m @ 0.34 g/t Au	1.0	
DSDD0075	59.00	60.00	1.00	0.12			
DSDD0075	60.00	61.00	1.00	0.39			
DSDD0075	76.00	77.00	1.00	0.19			
DSDD0075	87.00	88.00	1.00	0.23	1.00 m @ 0.23 g/t Au	0.2	
DSDD0075	103.50	104.50	1.00	0.26	1.00 m @ 0.26 g/t Au	0.3	
DSDD0075	114.00	115.00	1.00	0.11			
DSDD0076	71.50	72.50	1.00	0.14			
DSDD0076	79.50	80.50	1.00	0.10			
DSDD0076	124.00	125.00	1.00	0.14			
DSDD0076	125.00	126.00	1.00	0.16			
DSDD0076	127.00	128.00	1.00	0.17			
DSDD0076	128.00	129.00	1.00	<b>1.05</b>	5.00 m @ 0.38 g/t Au	1.9	
DSDD0076	129.00	130.00	1.00	0.16			
DSDD0076	130.00	131.00	1.00	0.07			
DSDD0076	131.00	132.00	1.00	0.32			
DSDD0076	132.00	133.00	1.00	0.28			
DSDD0076	135.00	136.00	1.00	0.12			
DSDD0076	136.00	137.00	1.00	0.25	40.00 m @ 1.03 g/t Au	<b>41.3</b>	
DSDD0076	137.00	138.00	1.00	0.19			
DSDD0076	138.00	139.00	1.00	0.59			
DSDD0076	139.00	140.00	1.00	0.31			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0076	140.00	141.00	1.00	0.40			
DSDD0076	141.00	142.00	1.00	0.26			
DSDD0076	142.00	143.00	1.00	0.87			
DSDD0076	143.00	144.00	1.00	0.95			
DSDD0076	144.00	145.00	1.00	0.68			
DSDD0076	145.00	146.00	1.00	0.50			
DSDD0076	146.00	147.00	1.00	0.03			
DSDD0076	147.00	148.00	1.00	0.23			
DSDD0076	148.00	149.00	1.00	<b>2.73</b>			
DSDD0076	149.00	150.00	1.00	<b>1.45</b>			<b>3.00 m @ 1.75 g/t Au</b>
DSDD0076	150.00	151.00	1.00	<b>1.07</b>			
DSDD0076	151.00	152.00	1.00	0.72			
DSDD0076	152.00	153.00	1.00	<b>2.85</b>			<b>2.00 m @ 2.03 g/t Au</b>
DSDD0076	153.00	154.00	1.00	<b>1.21</b>			
DSDD0076	154.00	155.00	1.00	0.73			
DSDD0076	155.00	156.00	1.00	<b>1.21</b>			2.00 m @ 1.25 g/t Au
DSDD0076	156.00	157.00	1.00	<b>1.30</b>			
DSDD0076	157.00	158.00	1.00	0.71			
DSDD0076	158.00	159.00	1.00	<b>1.60</b>			
DSDD0076	159.00	160.10	1.10	<b>3.03</b>			2.10 m @ 2.35 g/t Au
DSDD0076	160.10	161.00	0.90	0.75			
DSDD0076	161.00	162.00	1.00	<b>1.17</b>			1.00 m @ 1.17 g/t Au
DSDD0076	162.00	163.00	1.00	0.82			
DSDD0076	163.00	164.00	1.00	<b>2.42</b>			1.00 m @ 2.42 g/t Au
DSDD0076	164.00	165.00	1.00	0.53			
DSDD0076	165.00	166.00	1.00	0.59			
DSDD0076	166.00	167.00	1.00	<b>1.30</b>			
DSDD0076	167.00	168.00	1.00	<b>1.68</b>			
DSDD0076	168.00	169.00	1.00	<b>1.12</b>			<b>5.00 m @ 1.70 g/t Au</b>
DSDD0076	169.00	170.00	1.00	<b>1.48</b>			
DSDD0076	170.00	171.00	1.00	<b>2.93</b>			
DSDD0076	171.00	172.00	1.00	0.44			
DSDD0076	172.00	173.00	1.00	0.48			
DSDD0076	173.00	174.00	1.00	0.48			
DSDD0076	174.00	175.00	1.00	0.70			
DSDD0076	175.00	176.00	1.00	0.33			
DSDD0076	261.00	261.85	0.85	0.14			
DSDD0076	265.00	266.00	1.00	0.34	1.00 m @ 0.34 g/t Au	0.3	
DSDD0076	271.00	272.00	1.00	0.11			
DSDD0076	272.00	273.00	1.00	0.21	1.00 m @ 0.21 g/t Au	0.2	
DSDD0076	287.00	288.00	1.00	0.26	1.00 m @ 0.26 g/t Au	0.3	
DSDD0076	291.00	292.00	1.00	0.21	1.00 m @ 0.21 g/t Au	0.2	

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0076	292.00	293.00	1.00	0.15			
DSDD0076	310.00	311.00	1.00	0.44	1.00 m @ 0.44 g/t Au	0.4	
DSDD0076	335.00	336.20	1.20	<b>2.04</b>	8.00 m @ 1.89 g/t Au	<b>15.1</b>	<b>4.00 m @ 3.47 g/t Au</b>
DSDD0076	336.20	337.00	0.80	<b>1.71</b>			
DSDD0076	337.00	338.00	1.00	<b>4.38</b>			
DSDD0076	338.00	339.00	1.00	<b>5.68</b>			
DSDD0076	339.00	340.00	1.00	0.05			
DSDD0076	340.00	341.00	1.00	0.26			
DSDD0076	341.00	342.00	1.00	0.52			
DSDD0076	342.00	343.00	1.00	0.38			
DSDD0076	344.00	345.00	1.00	0.21	10.00 m @ 0.32 g/t Au	3.2	
DSDD0076	345.00	346.00	1.00	0.92			
DSDD0076	346.00	347.00	1.00	0.36			
DSDD0076	347.00	348.00	1.00	0.14			
DSDD0076	348.00	349.00	1.00	0.03			
DSDD0076	349.00	350.00	1.00	0.35			
DSDD0076	350.00	351.00	1.00	0.25			
DSDD0076	351.00	352.00	1.00	0.04			
DSDD0076	352.00	353.00	1.00	0.65			
DSDD0076	353.00	354.00	1.00	0.21			
DSDD0076	358.00	359.00	1.00	0.10	7.34 m @ 0.41 g/t Au	3.0	
DSDD0076	359.00	360.23	1.23	0.19			
DSDD0076	360.23	361.00	0.77	0.17			
DSDD0076	362.66	364.00	1.34	0.31			
DSDD0076	364.00	365.00	1.00	0.19			
DSDD0076	365.00	366.00	1.00	0.01			
DSDD0076	366.00	367.00	1.00	0.14			
DSDD0076	367.00	368.00	1.00	0.52			
DSDD0076	368.00	369.00	1.00	<b>1.42</b>			
DSDD0076	369.00	370.00	1.00	0.32			
DSDD0076	393.00	394.00	1.00	0.19	3.00 m @ 0.49 g/t Au	1.5	1.00 m @ 1.42 g/t Au
DSDD0076	394.00	395.00	1.00	0.11			
DSDD0076	395.00	396.00	1.00	<b>1.02</b>	3.00 m @ 0.49 g/t Au	1.5	1.00 m @ 1.02 g/t Au
DSDD0076	396.00	397.00	1.00	0.14			
DSDD0076	397.00	398.00	1.00	0.32			
DSDD0076	403.00	404.00	1.00	0.65	1.00 m @ 0.65 g/t Au	0.7	
DSDD0076	407.87	409.00	1.13	0.12	10.34 m @ 0.33 g/t Au	3.4	
DSDD0076	411.86	413.00	1.14	0.11			
DSDD0076	415.00	416.00	1.00	0.24			
DSDD0076	416.00	417.00	1.00	0.28			
DSDD0076	417.00	418.00	1.00	0.50			
DSDD0076	418.00	419.00	1.00	0.18			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0076	419.00	420.00	1.00	0.06			
DSDD0076	420.00	421.00	1.00	0.14			
DSDD0076	421.00	422.00	1.00	0.42			
DSDD0076	422.00	423.00	1.00	0.09			
DSDD0076	423.00	424.00	1.00	0.92			
DSDD0076	424.00	425.34	1.34	0.44			
DSDD0076	425.34	426.50	1.16	0.18			
DSDD0076	427.50	428.50	1.00	0.11			
DSDD0076	436.48	437.50	1.02	0.11			
DSDD0077	1.01	1.88	0.87	0.21			
DSDD0077	27.00	28.00	1.00	0.35	1.00 m @ 0.35 g/t Au	0.4	
DSDD0077	142.00	143.00	1.00	0.13			
DSDD0077	146.00	147.00	1.00	<b>2.39</b>	2.00 m @ 1.41 g/t Au	2.8	1.00 m @ 2.39 g/t Au
DSDD0077	147.00	148.00	1.00	0.42			
DSDD0077	148.00	149.00	1.00	0.13			
DSDD0077	167.00	168.00	1.00	0.13			
DSDD0077	170.00	171.00	1.00	0.11			
DSDD0077	176.00	177.00	1.00	0.35	1.00 m @ 0.35 g/t Au	0.4	
DSDD0078	28.50	29.50	1.00	<b>1.06</b>	3.00 m @ 0.50 g/t Au	1.5	1.00 m @ 1.06 g/t Au
DSDD0078	29.50	30.50	1.00	0.02			
DSDD0078	30.50	31.50	1.00	0.42			
DSDD0078	43.00	44.00	1.00	0.11			
DSDD0078	151.00	152.00	1.00	<b>1.03</b>	1.00 m @ 1.03 g/t Au	1.0	1.00 m @ 1.03 g/t Au
DSDD0078	162.00	163.00	1.00	<b>1.40</b>	1.00 m @ 1.40 g/t Au	1.4	1.00 m @ 1.40 g/t Au
DSDD0078	177.00	178.00	1.00	0.31	6.00 m @ 0.23 g/t Au	1.4	
DSDD0078	178.00	179.00	1.00	0.05			
DSDD0078	179.00	180.00	1.00	0.07			
DSDD0078	180.00	181.00	1.00	0.49			
DSDD0078	181.00	182.00	1.00	0.01			
DSDD0078	182.00	183.00	1.00	0.44			
DSDD0080	90.50	91.50	1.00	0.15			
DSDD0080	92.50	93.50	1.00	0.19			
DSDD0080	93.50	94.50	1.00	0.12			
DSDD0080	183.00	184.00	1.00	0.10			
DSDD0080	184.00	185.00	1.00	0.14			
DSDD0080	227.00	228.00	1.00	0.10			
DSDD0080	297.00	298.00	1.00	0.21	1.00 m @ 0.21 g/t Au	0.2	
DSDD0081	90.00	91.00	1.00	0.14			
DSDD0081	150.00	151.00	1.00	0.14			
DSDD0082	11.00	12.00	1.00	0.11			
DSDD0082	33.00	34.06	1.06	0.13			
DSDD0082	51.50	52.50	1.00	0.11			

For personal use only



Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0082	54.50	55.50	1.00	0.31	2.00 m @ 0.36 g/t Au	0.7	
DSDD0082	55.50	56.50	1.00	0.42			
DSDD0082	64.50	65.50	1.00	0.19	2.00 m @ 0.51 g/t Au	1.0	
DSDD0082	66.50	67.50	1.00	0.72			
DSDD0082	67.50	68.50	1.00	0.29			
DSDD0082	83.50	84.50	1.00	0.17	1.10 m @ 0.21 g/t Au	0.2	
DSDD0082	84.50	85.60	1.10	0.21			
DSDD0082	97.00	98.00	1.00	0.11	1.00 m @ 0.39 g/t Au	0.4	
DSDD0082	120.00	121.00	1.00	0.19			
DSDD0082	185.00	186.00	1.00	0.39	7.00 m @ 0.26 g/t Au	1.8	
DSDD0082	191.00	192.00	1.00	0.10			
DSDD0082	192.00	193.00	1.00	0.19			
DSDD0082	193.00	194.00	1.00	0.23			
DSDD0082	194.00	195.34	1.34	0.89			
DSDD0082	195.34	196.00	0.66	0.03			
DSDD0082	196.00	197.00	1.00	0.01			
DSDD0082	197.00	198.00	1.00	0.01			
DSDD0082	198.00	199.00	1.00	0.01			
DSDD0082	199.00	200.00	1.00	0.34			
DSDD0084	38.00	39.00	1.00	0.13	1.00 m @ 0.52 g/t Au	0.5	
DSDD0084	63.00	64.00	1.00	0.52			
DSDD0084	65.00	65.53	0.53	0.10	1.00 m @ 0.36 g/t Au	0.4	
DSDD0084	152.00	153.00	1.00	0.36			
DSDD0084	188.00	189.00	1.00	0.18			
DSDD0084	193.00	194.00	1.00	0.14			
DSDD0084	202.00	203.00	1.00	0.14			
DSDD0084	203.00	204.00	1.00	0.11			
DSDD0084	210.00	211.00	1.00	0.10			
DSDD0084	270.00	271.00	1.00	<b>1.58</b>			3.00 m @ 0.66 g/t Au
DSDD0084	271.00	272.00	1.00	0.11			
DSDD0084	272.00	273.00	1.00	0.29			
DSDD0084	307.00	308.00	1.00	<b>2.16</b>	1.00 m @ 2.16 g/t Au	2.2	1.00 m @ 2.16 g/t Au
DSDD0085A	62.00	63.00	1.00	0.25	1.00 m @ 0.25 g/t Au	0.3	
DSDD0086A	0.00	0.75	0.75	0.18	1.09 m @ 0.49 g/t Au	0.5	
DSDD0086A	35.55	36.64	1.09	0.49			
DSDD0086A	46.90	48.00	1.10	0.29	2.10 m @ 0.28 g/t Au	0.6	
DSDD0086A	48.00	49.00	1.00	0.27			
DSDD0086A	50.00	51.00	1.00	0.12	1.00 m @ 0.31 g/t Au	0.3	
DSDD0086A	176.00	177.00	1.00	0.19			
DSDD0086A	177.00	178.00	1.00	0.31			
DSDD0087	82.00	83.00	1.00	0.30	1.00 m @ 0.30 g/t Au	0.3	
DSDD0089	19.00	20.09	1.09	0.14			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0089	30.00	30.63	0.63	0.13			
DSDD0089	32.61	33.93	1.32	0.12			
DSDD0089	34.50	35.49	0.99	0.14			
DSDD0089	162.00	163.00	1.00	0.24	1.00 m @ 0.24 g/t Au	0.2	
DSDD0089	164.57	166.00	1.43	0.18			
DSDD0089	166.00	167.00	1.00	0.18			
DSDD0089	167.00	168.00	1.00	0.10			
DSDD0089	169.00	170.00	1.00	0.15			
DSDD0089	175.00	176.00	1.00	0.25			
DSDD0089	176.00	177.00	1.00	0.06			
DSDD0089	177.00	178.00	1.00	0.05			
DSDD0089	178.00	179.00	1.00	<b>3.09</b>			<b>1.00 m @ 3.09 g/t Au</b>
DSDD0089	179.00	180.00	1.00	0.84			
DSDD0089	180.00	181.00	1.00	<b>1.38</b>	10.00 m @ 1.14 g/t Au	<b>11.4</b>	1.00 m @ 1.38 g/t Au
DSDD0089	181.00	182.00	1.00	0.50			
DSDD0089	182.00	183.00	1.00	0.56			
DSDD0089	183.00	184.00	1.00	0.02			
DSDD0089	184.00	185.00	1.00	<b>4.62</b>			<b>1.00 m @ 4.62 g/t Au</b>
DSDD0089	195.00	196.00	1.00	0.22	1.00 m @ 0.22 g/t Au	0.2	
DSDD0089	199.00	200.00	1.00	0.34			
DSDD0089	200.00	201.00	1.00	0.16			
DSDD0089	201.00	202.00	1.00	0.06			
DSDD0089	202.00	203.00	1.00	0.27	8.00 m @ 0.25 g/t Au	2.0	
DSDD0089	203.00	204.00	1.00	0.30			
DSDD0089	204.00	205.00	1.00	0.54			
DSDD0089	205.00	205.90	0.90	0.08			
DSDD0089	205.90	207.00	1.10	0.20			
DSDD0089	207.00	208.00	1.00	0.13			
DSDD0089	208.00	209.00	1.00	0.12			
DSDD0089	231.00	232.00	1.00	0.10			
DSDD0089	232.00	233.00	1.00	0.11			
DSDD0089	258.00	259.00	1.00	0.17			
DSDD0089	260.00	261.00	1.00	0.50			
DSDD0089	261.00	262.00	1.00	0.10			
DSDD0089	262.00	263.00	1.00	0.11	5.00 m @ 0.26 g/t Au	1.3	
DSDD0089	263.00	264.00	1.00	0.28			
DSDD0089	264.00	265.00	1.00	0.30			
DSDD0089	273.00	274.00	1.00	0.10			
DSDD0089	274.00	275.00	1.00	0.38			
DSDD0089	275.00	276.00	1.00	0.18	7.00 m @ 0.21 g/t Au	1.5	
DSDD0089	276.00	277.00	1.00	0.28			
DSDD0089	277.00	278.00	1.00	0.04			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0089	278.00	279.00	1.00	0.18			
DSDD0089	279.00	280.00	1.00	0.17			
DSDD0089	280.00	281.00	1.00	0.25			
DSDD0089	281.80	283.00	1.20	0.47	1.20 m @ 0.47 g/t Au	0.6	
DSDD0089	309.00	310.00	1.00	0.19			
DSDD0091	80.00	81.00	1.00	0.14			
DSDD0091	153.00	154.00	1.00	0.19			
DSDD0096	100.00	101.00	1.00	<b>1.56</b>	1.00 m @ 1.56 g/t Au	1.6	1.00 m @ 1.56 g/t Au
DSDD0096	142.00	143.00	1.00	0.13			
DSDD0096	155.00	156.00	1.00	0.10			
DSDD0096	157.00	158.00	1.00	0.10			
DSDD0096	185.00	186.00	1.00	0.13			
DSDD0096	193.00	194.00	1.00	0.10			
DSDD0096	247.00	248.00	1.00	0.10			
DSDD0096	267.00	267.65	0.65	0.24			
DSDD0096	267.65	269.00	1.35	0.32			
DSDD0096	269.00	270.00	1.00	0.13			
DSDD0096	270.00	271.00	1.00	0.05			
DSDD0096	271.00	272.00	1.00	<b>2.21</b>			1.00 m @ 2.21 g/t Au
DSDD0096	272.00	273.00	1.00	0.42			
DSDD0096	273.00	274.00	1.00	0.30	13.00 m @ 0.42 g/t Au	5.4	
DSDD0096	274.00	275.00	1.00	0.23			
DSDD0096	275.00	276.00	1.00	0.41			
DSDD0096	276.00	277.00	1.00	0.13			
DSDD0096	277.00	278.00	1.00	0.17			
DSDD0096	278.00	279.00	1.00	0.46			
DSDD0096	279.00	280.00	1.00	0.33			
DSDD0096	280.00	281.00	1.00	0.18			
DSDD0096	281.00	282.00	1.00	0.17			
DSDD0096	282.00	283.00	1.00	0.30			
DSDD0096	283.00	284.00	1.00	0.17			
DSDD0096	284.00	285.00	1.00	0.02	6.00 m @ 0.26 g/t Au	1.6	
DSDD0096	285.00	286.00	1.00	0.16			
DSDD0096	286.00	287.00	1.00	0.19			
DSDD0096	287.00	288.00	1.00	0.73			
DSDD0096	288.00	289.00	1.00	0.10			
DSDD0096	289.00	290.00	1.00	0.16			
DSDD0096	291.00	292.00	1.00	0.15			
DSDD0096	292.00	293.00	1.00	0.31			
DSDD0096	293.00	294.00	1.00	0.61	9.00 m @ 0.27 g/t Au	2.5	
DSDD0096	294.00	295.00	1.00	0.17			
DSDD0096	295.00	296.00	1.00	0.04			

For personal use only

Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0096	296.00	297.00	1.00	0.10			
DSDD0096	297.00	298.00	1.00	0.56			
DSDD0096	298.00	299.00	1.00	0.34			
DSDD0096	299.00	300.00	1.00	0.09			
DSDD0096	300.00	301.00	1.00	0.25			
DSDD0096	302.00	303.00	1.00	0.18			
DSDD0096	303.00	304.00	1.00	0.11			
DSDD0096	305.00	306.00	1.00	0.14			
DSDD0096	306.00	307.00	1.00	0.82	8.00 m @ 0.40 g/t Au	3.2	
DSDD0096	307.00	308.00	1.00	0.25			
DSDD0096	308.00	309.00	1.00	0.75			
DSDD0096	309.00	310.00	1.00	0.28			
DSDD0096	310.00	311.00	1.00	0.31			
DSDD0096	311.00	312.00	1.00	0.06			
DSDD0096	312.00	313.00	1.00	0.17			
DSDD0096	313.00	314.00	1.00	0.54			
DSDD0096	315.00	316.00	1.00	0.87	7.00 m @ 0.24 g/t Au	1.7	
DSDD0096	316.00	317.00	1.00	0.12			
DSDD0096	317.00	318.00	1.00	0.27			
DSDD0096	318.00	319.00	1.00	0.01			
DSDD0096	319.00	320.00	1.00	0.01			
DSDD0096	320.00	321.00	1.00	0.11			
DSDD0096	321.00	322.00	1.00	0.29			
DSDD0096	323.00	324.00	1.00	0.10			
DSDD0096	328.00	329.00	1.00	0.20	1.00 m @ 0.20 g/t Au	0.2	
DSDD0096	330.00	331.00	1.00	0.25	19.00 m @ 0.82 g/t Au	15.6	
DSDD0096	331.00	332.00	1.00	0.06			
DSDD0096	332.00	333.00	1.00	0.20			
DSDD0096	333.00	334.00	1.00	0.78			
DSDD0096	334.00	335.00	1.00	0.75			
DSDD0096	335.00	336.00	1.00	0.13			
DSDD0096	336.00	337.00	1.00	0.04			
DSDD0096	337.00	338.00	1.00	0.02			
DSDD0096	338.00	339.00	1.00	0.58			
DSDD0096	339.00	340.00	1.00	0.67			
DSDD0096	340.00	341.00	1.00	0.23			
DSDD0096	341.00	342.00	1.00	0.59			
DSDD0096	342.00	343.00	1.00	0.36			
DSDD0096	343.00	344.00	1.00	0.29			
DSDD0096	344.00	345.00	1.00	0.30			
DSDD0096	345.00	346.00	1.00	1.19			1.00 m @ 1.19 g/t Au
DSDD0096	346.00	347.00	1.00	0.70			

For personal use only



Hole ID	From	To	Interval	Au (ppm)	Sig Int > 0.2 g/t Au	m*g/t Au (gpm)	Sig Int >1 g/t Au
DSDD0096	347.00	348.00	1.00	<b>7.87</b>			<b>1.00 m @ 7.87 g/t Au</b>
DSDD0096	348.00	349.00	1.00	0.62			
DSDD0096	349.00	350.00	1.00	0.10			
DSDD0096	352.00	353.00	1.00	0.28			
DSDD0096	353.00	354.00	1.00	0.37			
DSDD0096	354.00	355.00	1.00	<b>1.23</b>			<b>1.00 m @ 1.23 g/t Au</b>
DSDD0096	355.00	356.00	1.00	0.55			
DSDD0096	356.00	357.00	1.00	0.19			
DSDD0096	357.00	358.00	1.00	0.20			
DSDD0096	358.00	359.00	1.00	<b>1.43</b>			<b>1.00 m @ 1.43 g/t Au</b>
DSDD0096	359.00	360.00	1.00	0.44			
DSDD0096	360.00	361.00	1.00	<b>1.19</b>	<b>17.00 m @ 0.52 g/t Au</b>	<b>8.9</b>	<b>1.00 m @ 1.19 g/t Au</b>
DSDD0096	361.00	362.00	1.00	0.68			
DSDD0096	362.00	363.00	1.00	0.78			
DSDD0096	363.00	364.00	1.00	0.51			
DSDD0096	364.00	365.00	1.00	0.10			
DSDD0096	365.00	366.00	1.00	0.11			
DSDD0096	366.00	367.00	1.00	0.12			
DSDD0096	367.00	368.00	1.00	0.39			
DSDD0096	368.00	369.00	1.00	0.35			
DSDD0096	369.00	370.00	1.00	0.18			
DSDD0096	370.00	371.00	1.00	0.28			
DSDD0096	371.00	372.00	1.00	0.12			
DSDD0096	372.00	373.00	1.00	0.72			
DSDD0096	373.00	374.00	1.00	0.05	<b>7.00 m @ 0.23 g/t Au</b>	<b>1.6</b>	
DSDD0096	374.00	375.00	1.00	0.01			
DSDD0096	375.00	376.00	1.00	0.04			
DSDD0096	376.00	377.00	1.00	0.36			
DSDD0096	377.00	378.20	1.20	0.14			
DSDD0096	386.00	387.00	1.00	0.11			

For personal use only

## About Aurum's Boundiali Gold Project

The Boundiali Gold Project is comprised of four neighbouring exploration tenements (Figure 2):

- 1) Boundiali Minex Tenement PR0893 ("**BM**"), 400km<sup>2</sup>, holder Minex West Africa, of which Aurum is earning interest of up to 80-88% through its fully owned subsidiary Plusor Global Pty Ltd ("Plusor").
- 2) Boundiali DS tenement PR808 ("**BD**"), 260km<sup>2</sup>, holder DS Resources Joint Venture Company, of which Aurum is 80% share capital owner through its fully owned subsidiary Plusor.
- 3) Boundiali South tenement PR414 ("**BST**"), 167.34km<sup>2</sup> and is located directly south of Aurum's BD and BM tenement. The **BST** exploration tenement was granted to Predictive Discovery Côte d'Ivoire SARL on 1 August 2014 and is currently under renewal. Predictive Discovery Côte d'Ivoire SARL (89% owned by Turaco Gold Limited and 11% owned by Predictive Discovery Limited) agreed to sell 100% interest to Aurum, subject to Aurum obtaining a renewal of the Boundiali South tenement (or the granting of a replacement tenement) and being satisfied that the terms of the renewal (or replacement) do not restrict exploration or potential future mining rights, along with all required Government approvals.
- 4) Boundiali North tenement PR283 ("**BN**"), 208.87km<sup>2</sup>, under renewal, Aurum to earn up to 70% interest through its wholly owned subsidiary Plusor.

The Boundiali Gold Project is located within the same greenstone belt as Resolute's large Syama (11.5Moz) gold mine and Perseus' Sissingue (1.4 Moz) gold mine to the north and Montage Gold's 4.5Moz Koné project located to the south. Barrick's Tongon mine (5.0Moz) is located to the northeast (Figure 1).

### BM gold project JV

Plusor is earning interest through carrying out diamond drilling programs of 8,000m to earn 80% interest in two stages.

- Drilling 4,000m diamond holes to earn 30% interest
- Drilling a further 4,000m diamond holes to earn accumulated 51% interest
- Earn an accumulated 80% interest from a total exploration expenditure of US\$2.5M using a nominal diamond drilling cost of US\$140/m in calculation for expenditure commitment.
- 80-88% interest in future gold production company (Government gets 10% free carry from local partner):
  - 80% if local partner contributes 11% capex
  - 85% if local partner does not contribute capex – they go to 5% free carry
  - 88% if local partner sells us 3% of their interest they go to 2% free carry

### BD gold project JV

Plusor owns 80% interest acquired from DS Joint Venture Company's two shareholders:

- acquired 45% share capital of DS Joint Venture Company Sarl by paying US\$430,000 to DS Resources Sarl; and

- acquired 35% share capital of DS Joint Venture Company Sarl from Turaco Gold Ltd by drilling 3,500m diamond holes in Turaco's other gold projects in Cote D'Ivoire. This commitment has been completed.
- 80-88% interest in future gold production company (Government gets 10% free carry from local partner):
  - 80% if local partner contributes 11% capex
  - 85% if local partner does not contribute capex – they go to 5% free carry
  - 88% if local partner sells us 3% of their interest they go to 2% free carry

#### **BST gold project consideration and payment for the binding term sheet**

- Purchase of the tenement is subject to Aurum obtaining a renewal of the **BST** tenement (or the granting of a replacement) and being satisfied that the terms of the renewal (or replacement permit) do not restrict exploration or potential future mining rights, along with required Government approvals
- Within 15 business days of the satisfaction (or waiver) of the conditions precedent above, the Seller will, by written notice to the Purchaser, elect to receive **one** of the following forms of consideration (**Election**):
  - (i) A\$800,000 in cash (**Cash Consideration**); or
  - (ii) If the 20-day volume weighted average trading price of Shares (**VWAP**) is:
    - *Less than or equal to A\$0.20 at the time of the Election, 5,000,000 fully paid ordinary shares in the Purchaser (Shares) (Consideration Shares 1); or*
    - *Greater than A\$0.20 at the time of the Election, Shares to a value of A\$1.2 million, as determined by dividing A\$1.2 million by the 20-day VWAP for the Shares (Consideration Shares 2)*
- 90% interest in future gold production company (Government get 10% free carry from our interest)

#### **BN gold project JV**

Aurum is earning interest through carrying out exploration to earn 70% interest in three stages:

- Stage 1: Aurum earns 35% interest by spending USD 1.2 million within 36 months of license grant
- Stage 2: Aurum earns 51% interest by spending USD 2.5 million within 60 months of license grant
- Stage 3: Aurum earns 70% interest upon completion of a pre-feasibility study on the tenement.
- Diamond drilling conducted by Aurum will be valued at US\$140 per meter for expenditure calculations
- Upon grant of a mining exploitation license, the ownership structure will be: Aurum (70%), GNRR (20%), Ivorian Government (10%)

Section 1 of the JORC Code, 2012 Edition – Table 1

Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Samples were collected using diamond drilling techniques generally angled at 50° towards north-northwest to optimally intersect the mineralised zones.</li> <li>Diamond core was logged both for geological and mineralised structures as noted above. The core was then cut in half using a diamond brick cutting saw on 1m intervals. Typically the core was sampled to geological intervals as defined by the geologist within the even two metre sample intervals utilised. The right-hand side of the core was always submitted for analysis with the left side being stored in trays on site</li> <li>Sampling and QAQC procedures were carried out to industry standards.</li> <li>Sample preparation was completed by independent international accredited laboratory Intertek Minerals Ltd. Following cutting or splitting, the samples were bagged by the Client employees and then sent to the laboratory for preparation. These samples were subsequently sent to Ghana for analysis via 30g fire assay.</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Diamond drilling carried out with mostly NTW and some HQ sized equipment. PQ-size rods and casing were used at the top the holes to stabilise the collars although no samples were taken from the PQ size core.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Diamond drilling core recoveries ranged between 85% and 100% for all holes with no significant issues noted.</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</li> <li>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</li> <li>The total length and percentage of the relevant intersections logged.</li> </ul>	<ul style="list-style-type: none"> <li>All holes were field logged by company geologists. Lithological, alteration and mineralogical nomenclature of the deposit as well as sulphide content were recorded. Metallurgical, Geotechnical and structural data has been recorded</li> <li>Photography and recovery measurements were carried out by assistants under a geologist's supervision.</li> <li>All drill holes were logged in full.</li> <li>Logging was qualitative and quantitative in nature.</li> </ul>

For personal use only

For personal use only

Criteria	JORC Code explanation	Commentary
<b>Sub-sampling techniques and sample preparation</b>	<ul style="list-style-type: none"> <li>• If core, whether cut or sawn and whether quarter, half or all core taken.</li> <li>• If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</li> <li>• For all sample types, the nature, quality and appropriateness of the sample preparation technique.</li> <li>• Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</li> <li>• Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</li> <li>• Whether sample sizes are appropriate to the grain size of the material being sampled.</li> </ul>	<ul style="list-style-type: none"> <li>• NTW core cut in half using a core saw. Typically, the core was sampled to major geological intervals as defined by the geologist within the even two metre sample intervals utilised. All samples were collected from the same side of the core.</li> <li>• Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation based on: the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value ranges for Au.</li> <li>• The 250gm sample is milled through an LM5 using a single puck to 90% &lt;75 micron</li> <li>• Milled sample is homogenised through a matt roll with a 150gm routine sample collected using a spoon around the quadrants and sent to Ghana for analysis and the remaining 100gm kept at Intertek for checks.</li> <li>• Field QC procedures involved the use of 2 types of certified reference materials (1 in 20) which is certified by Geostats Ltd,</li> <li>• Primary RC duplicates: Generated from the first splitter off the rig and inserted 5% (1 in 20 samples). This sample is collected from a spear sample from the reject material of the primary split.</li> <li>• Primary DD duplicate: Generated by cutting the remaining half core into a ¼ and sampled.</li> <li>• Coarse blank samples: Inserted 1 in every 20 samples</li> <li>• Laboratory Internal Duplicates and Standards</li> <li>• Sample sizes are considered appropriate to correctly represent the moderately nuggetty gold mineralisation based on: the style of mineralisation, the thickness and consistency of the intersections, the sampling methodology and assay value ranges for gold</li> </ul>
<b>Quality of assay data and laboratory tests</b>	<ul style="list-style-type: none"> <li>• The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</li> <li>• For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</li> <li>• Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and</li> </ul>	<ul style="list-style-type: none"> <li>• The analytical techniques used 50 gram Fire Assay on 150g pulp samples. Aurum is investigating assaying for gold using Chryso<sup>TM</sup> PhotonAssay methodology . This uses a high-energy X-ray source that is used to irradiate large mineral samples, typically about 500g compared to the 50g of the fire assay. The X-rays induce short-lived changes in the structure of any gold nuclei present. As the excited gold nuclei return to their ground state, they emit a characteristic gamma-ray signature, the intensity of which is directly proportional to the concentration of gold. The penetrating nature of</li> </ul>

Criteria	JORC Code explanation	Commentary
	precision have been established.	<p>Chryso<sup>TM</sup> PhotonAssay provides much higher energy than those used in conventional X-ray fluorescence (XRF), which provides a true bulk analysis of the entire sample. Samples are presented into a fully automatic process where samples are irradiated, measured, data collection and reporting. Further work is ongoing to determine the suitability of this method.</p> <ul style="list-style-type: none"> <li>No geophysical tools were used to determine any element concentrations used for this report.</li> <li>Sample preparation checks for fineness were carried out by the laboratory as part of internal procedures to ensure the grind size of 2mm was being attained. Laboratory QAQC includes the use of internal standards using certified reference material, and pulp replicates. No anomalous assays were noted in information provided to the Client.</li> <li>The QAQC results confirm that acceptable levels of accuracy and precision have been established for the Classifications applied.</li> </ul>
<b>Verification of sampling and assaying</b>	<ul style="list-style-type: none"> <li>The verification of significant intersections by either independent or alternative company personnel.</li> <li>The use of twinned holes.</li> <li>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</li> <li>Discuss any adjustment to assay data.</li> </ul>	<ul style="list-style-type: none"> <li>NA</li> <li>No holes have been twinned</li> <li>No adjustment to assay data</li> <li>Logging records were mostly registered in physical format and were input into a digital format. The core photographs, collar coordinates and down the hole surveys were received in digital format.</li> <li>Assay values that were below detection limit were adjusted to equal half of the detection limit value. Un-sampled intervals were assumed to have no mineralisation and they were therefore set to blank in the database, however these are minimal.</li> </ul>
<b>Location of data points</b>	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Specification of the grid system used.</li> <li>Quality and adequacy of topographic control.</li> </ul>	<ul style="list-style-type: none"> <li>DD collar positions were located using a handheld GPS with a location error of +/-3m.</li> <li>The datum employed is WGS84, Zone 29</li> </ul>
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>Data spacing for reporting of Exploration Results.</li> <li>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</li> <li>Whether sample compositing has been applied.</li> </ul>	<ul style="list-style-type: none"> <li>Drillholes were completed on variable spacings and orientations.</li> <li>No judgement has yet been made by an independent qualified consultant on whether the drill density is sufficient to calculate a Mineral Resource.</li> <li>The samples were not composited prior to assay.</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</li> <li>If the relationship between the drilling</li> </ul>	<ul style="list-style-type: none"> <li>Drill holes were drilled approximately at right angles to the anticipated strike of the target geochemical anomaly and orthogonal to the interpreted mineralisation orientation.</li> </ul>



Criteria	JORC Code explanation	Commentary
	<i>orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i>	
<b>Sample security</b>	<ul style="list-style-type: none"> <li>The measures taken to ensure sample security.</li> </ul>	<ul style="list-style-type: none"> <li>Chain of custody is managed by the Client's senior site geologists and geotechnicians. Samples are stored in a core shed at site and samples were delivered to the laboratory by client geologists. Client employees have no further involvement in the preparation or analysis of the samples.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>The results of any audits or reviews of sampling techniques and data.</li> </ul>	<ul style="list-style-type: none"> <li>Aurum is reviewing the suitability of PhotonAssay to analyse for gold compared to fire assay. This work is ongoing.</li> </ul>

### Section 2 of the JORC Code, 2012 Edition – Table 1

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a license to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>Exploration results are from the Boundiali project area.</li> <li>There are no impediments to working in the area.</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>The exploration results reported in this announcement are from work undertaken by PlusOr and BM on behalf of Aurum Resources Limited</li> <li>The license area is known as a prospective region for gold and recent artisanal workings revealed the presence of primary gold mineralisation in artisanal pits and small-scale underground mining.</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The geology consists of granitoid intrusives, metasediments, typical of granite – greenstone belt Birimian terrains. Mineralisation style is typical structurally controlled, mesothermal, lode gold orogenic style.</li> </ul>
<b>Drill hole information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the under-standing of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> <li>easting and northing of the drill hole collar</li> <li>elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar</li> <li>dip and azimuth of the hole</li> <li>down hole length and interception depth</li> <li>hole length</li> </ul> </li> <li>If the exclusion of this information is justified on the basis that the information is not</li> </ul>	<ul style="list-style-type: none"> <li>Complete drill hole data has been provided.</li> <li>Drill hole collar locations are shown in figures in main body of announcement.</li> </ul>

For personal use only

Criteria	JORC Code explanation	Commentary
	<i>Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</i>	
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Assay intervals are shown in detail. Drilling intervals are predominantly 1m and 2m.</li> <li>Metal equivalent values are not being reported.</li> </ul>
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>These relationships are particularly important in the reporting of Exploration Results.</li> <li>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</li> <li>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').</li> </ul>	<ul style="list-style-type: none"> <li>True widths have not been estimated as the geological controls on mineralisation in these initial drill holes into the prospect are not yet well understood.</li> <li>The holes were drilled from east to west to test a steeply east dipping foliation in the limited rock exposures seen in the area. The mineralisation lies within what has been interpreted to be a ductile shear zone which would suggest that mineralisation should lie parallel to foliation.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.</li> </ul>	<ul style="list-style-type: none"> <li>Appropriate diagrams relevant to material results are shown in the body of this announcement.</li> </ul>
<b>Balanced Reporting</b>	<ul style="list-style-type: none"> <li>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</li> <li>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</li> </ul>	<ul style="list-style-type: none"> <li>All drill hole and trench collar locations were surveyed utilising handheld GPS methods. Exploration results only being reported. No Mineral Resource exists</li> <li>Drilling teams utilised the Reflex EZ-shot instrument to measure deviations in azimuth and inclination angles for all holes; however, vertical holes were not surveyed. The first measurement is taken at 6 m depth, and then at approximately every 30m depth interval and at the end of the hole. being reported</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples - size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</li> </ul>	<ul style="list-style-type: none"> <li>All relevant exploration data is either reported in this announcement or has been reported previously by Randgold, Predictive Discovery and is referred to in the announcement.</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>The nature and scale of planned further work</li> </ul>	<ul style="list-style-type: none"> <li>The Company intends to continue</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>(e.g. tests for lateral extensions or depth extensions or large- scale step-out drilling).</i></p> <ul style="list-style-type: none"> <li>• <i>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</i></li> </ul>	<p><i>exploration on the project and this work will include auger, aircore, RC and diamond core drilling, along with further geophysical surveys and geochemical sampling programs.</i></p> <ul style="list-style-type: none"> <li>• <i>Diagrams included in body of report as deemed appropriate by competent person</i></li> </ul>

For personal use only