12 November 2025 ASX Code: WC1 ASX Release

EXTENSIVE GALLIUM MINERALISATION AT SALAZAR

Highlights

- Gallium mineralisation identified throughout the Salazar critical minerals project
- Additional prospectivity within the tenement area is demonstrated by grades of up to 145ppm Ga₂O₃ at Glenmorangie (GMGRCP001)
- Gallium is critical for the manufacture of computer chips, semi-conductors, internet infrastructure and other tech components
- Metallurgical test work indicates that gallium has the potential to be recovered alongside rare earths and scandium
- Existing Mineral Resource estimates being reviewed to potentially include gallium

Newmont Deposit

- Examination of historical drilling at the Newmont Deposit has identified significant intersections of gallium (Ga) from near surface, including:
 - ° SZA203 **5m @ 47.4ppm Ga (63.7ppm Ga₂O₃)** from 25m
 - ° SZA178 **14m @ 40.3ppm Ga (54.2ppm Ga₂O₃)** from 4m
 - o includes 3m @ 58.9ppm Ga (79.2ppm Ga₂O₃) from 7m
 - ° SZA111 **21m @ 37.4ppm Ga (50.3ppm Ga₂O₃)** from 9m
 - ° NSA119 **20m @ 39.0ppm Ga (52.4ppm Ga₂O₃)** from 6m
 - o includes 3m @ 62.0ppm Ga (83.3ppm Ga₂O₃) from 6m
 - ° NSA106 5m @ 39.5ppm Ga (53.1ppm Ga₂O₃) from 11m
 - ° SZA253 32m @ 37.4ppm Ga (50.3ppm Ga₂O₃) from 11m
 - ° SZA185 **33m @ 36.9ppm Ga (49.6ppm Ga₂O₃)** from 7m
- The above intersections all lie within and surrounding the Indicated + Inferred Mineral Resource at the Newmont REE Deposit of 123Mt of 1145ppm TREO* (includes Indicated Resource of 44Mt of 1229ppm TREO)
- Newmont has a unique mix of heavy REEs, as well as potentially recoverable scandium, gallium, titanium dioxide and alumina.

O'Connor Deposit

- Significant values also obtained from the O'Connor REE Deposit (Inferred Resource of 107Mt of 1216ppm TREO):
 - ° SZA079 **3m @ 39.9ppm Ga (53.6ppm Ga₂O₃)** from 8m
 - o includes 1m @ 68ppm Ga (91.4ppm Ga₂O₃) from 10m
 - ° SZA094 25m @ 28.6ppm Ga (38.4ppm Ga₂O₃) from 16m
 - SZA098 13m @ 31.0ppm Ga (41.7ppm Ga₂O₃) from 22m

Additional Gallium

- In addition to rare earths, significant intersections of gallium were obtained by reconnaissance RC drilling at the Glenmorangie and Talisker Prospects:
 - ° GMGRCP001 12m @ 56.0ppm Ga (75.3ppm Ga₂O₃) from 3m
 - includes 3m @ 108ppm Ga (145ppm Ga₂O₃) from 6m
 - ° TSKRC004 **12m @ 25.5ppm Ga (34.3ppm Ga₂O₃)** from 36m

^{*} TREO = La2O3 + CeO2 + Pr6O11 + Nd2O3 + Sm2O3 + Eu2O3 + Gd2O3 + Tb4O7 + Dy2O3 + Ho2O3 + Er2O3 + Tm2O3 + Yb2O3 + Lu2O3 + Y2O3



West Cobar Metals Limited (ASX:WC1) ("West Cobar", "the Company") is pleased to report that review and reanalysis of previous drill samples from the Salazar Critical Minerals Project located 150km NE of Esperance in Western Australia has identified significant amounts of gallium (Ga) throughout the Newmont and O'Connor deposits and adjacent prospects within the Company's tenements.

Gallium was not systematically assayed in the aircore programs of historical activity by Salazar Gold Pty Ltd or by West Cobar Metals in its Phase 1 and Phase 2 air core programs. China's recent announcement on the restriction of exports of gallium provided the impetus for the Company to re-analyse the samples from the Salazar project.

The Company previously reported an Indicated and Inferred Mineral Resource estimate for the Newmont deposit:¹

- Rare Earth Elements: 123Mt of 1145ppm TREO (Indicated and Inferred), (includes Indicated Resource of 44Mt of 1229ppm TREO)
- o **TiO₂**: 42Mt of 5.2% TiO₂ (2% Ti cut-off)
- Scandium: 15Mt of 100ppm Sc (75ppm Sc cut-off)
- o Alumina (potential HPA feedstock): 4Mt of 29.7% Al₂O₃, (15% Al cut-off)

At the O'Connor deposit there is an estimated Inferred Mineral Resource of 107Mt of 1216ppm TREO 1

Gallium lies both within and surrounding the existing estimated resources. By using the historical drill data and the re-analysing of West Cobar's air core samples, these resources can now be updated to include gallium.

West Cobar Managing Director, Matt Szwedzicki said: "The Salazar project contains valuable rare earth elements as well as a unique mix of high value co-products, such as scandium, titanium, alumina and now gallium. Historical metallurgical testwork undertaken by Nagrom shows that the Salazar clays are amenable to leaching with the recovery of REEs, Sc and Ga concentrates.

The recent export restrictions on gallium products imposed by China, indicate the vulnerability of western markets which could result in supply shortages that impact global production of computer chips and semi-conductors, used in smartphones, computers, EVs, military applications and other electronic devices.

We are now reviewing our Mineral Resource estimates in light of a potential gallium co-product.

The extensive gallium mineralisation within our tenure shows potential for significant upside outside of our current Salazar resource area. Reviewing the RC drilling results from earlier in the year, our Glenmorangie prospect intersected outstanding grades of up to 145ppm Ga_2O_3 from near surface.

¹ West Cobar Metals Ltd, ASX Release, 8 October 2024, 'Major Resource Expansions at Salazar'.

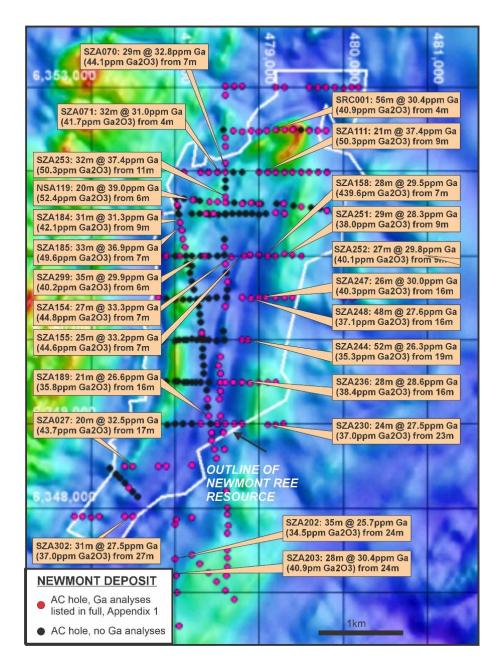


Figure 1 –Significant gallium intersections at the Newmont Deposit and surrounding area, also showing drill hole collar positions where gallium assays have been reported (all intersections are listed in Appendix 1) and outline of Newmont REE block model (>300ppm TREO).



Gallium Distribution

At the Newmont deposit, gallium occurs in saprolite associated with underlying mafic amphibolite which forms a tight fold through the centre of the deposit, reflected in the aeromagnetic image (Figure 1) and which is also the focus for REE, TiO_2 and scandium mineralisation e.g. SZA306 - 13m @ 44ppm Ga (59ppm Ga_2O_3) from 9m, also contains 0.37% TREO, 63ppm Sc, 7.5% TiO_2 . Some air core holes drilled through the centre of the deposit prior to West Cobar's involvement have not been analysed for gallium. There is also an association of gallium with felsic and intermediate gneisses along the eastern side of the deposit. Intersections in basement rocks are not included at this stage but may be re-assessed in the future.

There is considerable exploration potential both for gallium and the other critical element commodities, particularly SSW of the Newmont Deposit (intersections at Newmont South and Matilda South), the untested areas surrounding the O'Connor Deposit, and at the Glenmorangie and Talisker Prospects, as indicated by reconnaissance RC drilling (Figure 2).

Glenmorangie:

- ° GMGRCP001 12m @ 56.0ppm Ga (75.3ppm Ga₂O₃) from 3m
 - o includes 3m @ 108ppm Ga (145ppm Ga₂O₃) from 6m

Talisker:

- ° TSKRC001 3m @ 27.0ppm Ga (36.3ppm Ga₂O₃) from 48m
- ° TSKRC004 **12m @ 25.5ppm Ga (34.3ppm Ga₂O₃)** from 36m



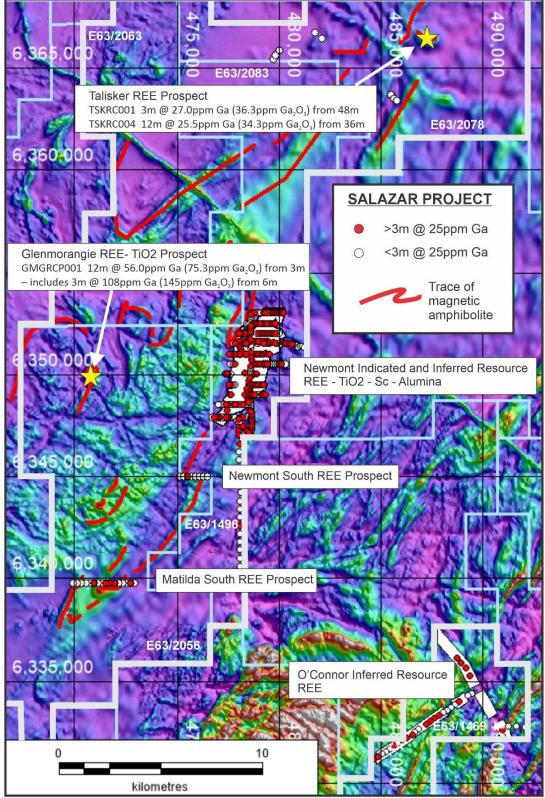


Figure 2 – Salazar Project - drill hole collar positions where gallium assays have been reported, and interpreted traces of magnetic amphibolite bedrock.



Nagrom Metallurgical Testwork

Nagrom² completed precipitation testwork on saprolite from the Newmont deposit (test sample from drill hole SAC1) to assess the recoverability of REE, gallium and scandium concentrates and to maximise acid recovery.

Micro leach test results for REE, gallium, scandium and alumina extractions focused on hydrochloric acid and sulphuric acid lixiviants, under a range of temperature, pulp density, acid concentration, agitation and leach time test conditions.

Sighter precipitation tests involving experiments with different reagents and processes to precipitate REE, gallium, scandium and aluminium products were carried out to observe the interactions of the complex chemistry of the leach liquor on the precipitation processes and products.

A summary of the head assay of sample SAC1 12-24m is presented in Table 1 below:

Z	Sample	Mass	Al ₂ 0 ₃	Sc ₂ O ₃	Ga	TREO+Y ₂ O ₃	HREO+Y ₂ O ₃	LREO
		g	%	ppm	ppm	%	%	%
	T2002 SAC1 12-24 RSV	32150	20.27	111	40	0.37	0.11	0.25

Table 1: Sample SAC1 12-24m, head assays

The sample was screened at 0.075mm in order to concentrate the rare earth oxides, gallium, scandium and alumina. Results are summarised in Table 2 below:

		SAC1 12-24 Wet Screen												
	PRODUCT	Yield	A	Al ₂ 0 ₃	,	Sc₂O₃		Ga	TREO+Y ₂ O ₃		HRE	O+Y ₂ O ₃	LREO	
))	Size (mm)	%	%	Dist.	ppm	Dist.	ppm	DIst.	%	Dist.	%	Dist.	%	Dist.
	+0.075	30.89%	5.59	8.69%	40	12.26%	15	11.82%	0.27	22.69%	0.09	27.01%	0.17	20.92%
)	-0.075	69.11%	26.25	91.31%	128	87.74%	50	88.18%	0.41	77.31%	0.11	72.99%	0.29	79.08%
	Calculated Head	100.00%	19.87	100.00%	101	100.00%	39	100.00%	0.36	100.00%	0.11	100.00%	0.26	100.00%

Table 2: Screened results to concentrate REE, Al, Ga and Sc oxides

A significantly higher portion of the gallium, scandium, alumina and light rare earth oxides (LREO: La, Ce, Pr, Nd, Sm and Eu Oxides) was reported for the -0.075mm fraction.

Eight leach tests were conducted on the whole sample and the -0.075mm fraction to investigate the influence of acid type and leach time on gallium, scandium, alumina and rare earth element extraction.

Between 45.13% - 81.61% of the gallium (Ga) was extracted with hydrochloric acid compared to over 36.87% - 72.71% with sulphuric acid. Extending the leach time from 8 to 24 hours resulted in improved gallium extraction.

² Nagrom 2016, Hydrometallurgical Report for Salazar Gold Pty Ltd Batch number T2118 (confidential report to Salazar Gold Pty Ltd).



Next Steps

West Cobar will review the existing Mineral Resource estimates for the Salazar project in light of the gallium mineralisation identified.

The Company will also build on the phase 1 extraction work undertaken by Nagrom and continue evaluating the combined REE and alumina (HPA), TiO₂, Sc and Ga co-product development pathway.

About West Cobar Metals Limited

West Cobar Metals Limited is an ASX listed exploration and development company focused on progressing the Bulla Park copper antimony project in NSW, the Salazar Critical Mineral Project (REEs + TiO2 + scandium + gallium + HPA alumina) in WA and exploring the Mystique Project in WA for gold.

Address: Suite B9, 431 Roberts Rd, Subiaco WA 6008

Phone: +61 8 9287 4600

Website: www.westcobarmetals.com.au Email: info@westcobarmetals.com.au

ACN: 649 994 669



Further information:

Matt Szwedzicki
Managing Director
ms@westcobarmetals.com.au

+61 8 9287 4600

Luke Forrestal
GRA Partners
luke.forrestal@grapartners.com.au

+61 411 479 144

This announcement has been prepared for publication in Australia and may not be released or distributed in the United States. This announcement does not constitute an offer to sell, or a solicitation of an offer to buy, securities in the United States or any other jurisdiction. Any securities described in this announcement have not been, and will not be, registered under the US Securities Act of 1933 and may not be offered or sold in the United States except in transactions exempt from, or not subject to, the registration of the US Securities Act and applicable US state securities laws.

Forward looking statement

Certain information in this document refers to the intentions of West Cobar, but these are not intended to be forecasts, forward looking statements or statements about the future matters for the purposes of the Corporations Act or any other applicable law. The occurrence of the events in the future are subject to risk, uncertainties and other actions that may cause West Cobar's actual results, performance or achievements to differ from those referred to in this document. Accordingly, West Cobar and its affiliates and their directors, officers, employees and agents do not give any assurance or guarantee that the occurrence of these events referred to in the document will actually occur as contemplated.

Statements contained in this document, including but not limited to those regarding the possible or assumed future costs, performance, dividends, returns, revenue, exchange rates, potential growth of West Cobar, industry growth or other projections and any estimated company earnings are or may be forward looking statements. Forward-looking statements can generally be identified by the use of words such as 'project', 'foresee', 'plan', 'expect', 'aim', 'intend', 'anticipate', 'believe', 'estimate', 'may', 'should', 'will' or similar expressions. These statements relate to future events and expectations and as such involve known and unknown risks and significant uncertainties, many of which are outside the control of West Cobar. Actual results, performance, actions and developments of West Cobar may differ materially from those expressed or implied by the forward-looking statements in this document.

Such forward-looking statements speak only as of the date of this document. There can be no assurance that actual outcomes will not differ materially from these statements. To the maximum extent permitted by law, West Cobar and any of its affiliates and their directors, officers, employees, agents, associates and advisers:

- disclaim any obligations or undertaking to release any updates or revisions to the information to reflect any change in expectations or assumptions;
- do not make any representation or warranty, express or implied, as to the accuracy, reliability or completeness of the
 information in this document, or likelihood of fulfilment of any forward-looking statement or any event or results
 expressed or implied in any forward-looking statement; and
- disclaim all responsibility and liability for these forward-looking statements (including, without limitation, liability for negligence).



Competent Person Statement and JORC Information

The Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves (the 'JORC Code') sets out minimum standards, recommendations and guidelines for Public Reporting in Australasia of Exploration Results, Mineral Resources and Ore Reserves.

The Information contained in this announcement is an accurate representation of the available data and studies for the Salazar Project.

The information contained in this announcement that relates to the exploration information, geological logging, and geological interpretation of gallium mineralisation at the Salazar REE Project WA is based, and fairly reflects, information compiled by Mr David Pascoe, who is Head of Technical and Exploration for West Cobar Metals Limited and a Member of the Australian Institute of Geoscientists. Mr Pascoe has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Pascoe consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

The information contained in this announcement that relates to the gallium metallurgical information at the Salazar REE Project WA is based, and fairly reflects, information compiled by Mr Aaron Debono, who is a full-time employee of NeoMet Engineering acting for West Cobar Metals Limited and a Fellow of the Australasian Institute of Mining and Metallurgy. Mr Debono has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Debono consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

The October 2024 Mineral Resource estimate was prepared, and fairly reflects information compiled, by Mr Serik Urbisinov, who has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as Competent Persons as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves" (the JORC Code). Mr Urbisinov is a full-time employee of AMC Consultants and a Member of the Australian Institute of Geoscientists. Mr Urbisinov consents to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.



Appendix 1

Salazar Critical Minerals Project - Gallium intersections

	Sa	alazar	Critica	ıl Min	ierals P	roject	- Galli	um inters	ections			
Deposit/ Prospect	Hole ID	Drill Hole Type	From (m)	To (m)	Interval (m)	Ga ppm	Ga2O3 ppm	GDA 94 E	GDA 94 N	Collar DTM	Dip	Azimuth
Newmont	NSA106	AC	11	16	5	39.5	53.1	478317	6350081	220.4	-90	0
Newmont	NSA119	AC	6	26	20	39.0	52.4	478212	6351660	215	-90	0
Newmont	SRC001	RC	4	60	56	30.4	40.9	479200	6352495	213	-60	270
Newmont	SRC002	RC	8	16	8	30.3	40.7	479300	6352495	213	-60	270
15	and		44	52	8	26.1	35.1					
Newmont	SRC003	RC	8	16	8	30.1	40.5	479402	6352504	213	-60	270
	and		47	51	4	30.6	41.1					
Newmont	SZA001	AC	34	37	3	25.3	34.0	478703	6346919	226	-90	0
Newmont	SZA002	AC	27	34	7	26.9	36.2	478598	6347025	226	-90	0
Newmont	SZA003	AC	25	29	4	25.5	34.3	478607	6347199	225	-90	0
Newmont	SZA004	AC	24	27	3	26.2	35.2	478617	6347299	225	-90	0
Newmont	SZA005	AC	37	40	3	26.6	35.8	478618	6347404	224	-90	0
Newmont	SZA006	AC	25	28	3	26.3	35.3	478620	6347504	224	-90	0
Newmont	SZA008	AC	25	28	3	27.3	36.7	478626	6347701	224	-90	0
Newmont	SZA009	AC	26	29	3	28.2	37.9	478629	6347800	223	-90	0
Newmont	SZA010	AC	26	35	9	27.3	36.7	478618	6347926	220	-90	0
Newmont	SZA011	AC	20	32	12	28.3	38.0	478617	6348013	218	-90	0
Newmont	SZA013	AC	24	27	3	27.6	37.1	478606	6348202	221	-90	0
Newmont	SZA020	AC	32	35	3	35.8	48.1	478202	6348511	220	-90	0
	includes		34	35	1	64.6	86.8					
Newmont	SZA023	AC	33	45	12	28.2	37.9	477900	6348499	221	-90	0
	and		51	56	5	27.3	36.7					
Newmont	SZA024	AC	30	42	12	25.9	34.8	477801	6348504	220	-90	0
Newmont	SZA027	AC	17	37	20	32.5	43.7	477499	6348502	222	-90	0
Newmont	SZA028	AC	19	22	3	25.6	34.4	477402	6348504	224	-90	0
Newmont	SZA032	AC	18	21	3	25.4	34.1	477452	6348245	223	-90	0
Newmont	SZA037	AC	24	36	12	26.0	34.9	478298	6347339	224	-90	0
Newmont	SZA038	AC	26	29	3	25.7	34.5	478396	6347238	224	-90	0
	and		47	50	3	25.4	34.1					
Newmont	SZA039	AC	26	30	4	27.7	37.2	478497	6347131	225	-90	0
Newmont	SZA040	AC	7	21	14	28.1	37.8	478603	6353015	220	-90	0
Newmont	SZA041	AC	9	16	7	25.7	34.5	478702	6353016	220	-90	0
Newmont	SZA042	AC	8	23	15	31.5	42.3	478799	6353012	220	-90	0
Newmont		AC	8	14	6	26.3	35.3	479198	6353006	220	-90	0
Newmont	SZA047	AC	8	22	14	27.6	37.1	479300	6353005	220	-90	0
Newmont	SZA050	AC	13	29	16	27.7	37.2	479595	6352998	220	-90	0
Newmont	SZA051	AC	16	27	11	26.1	35.1	479700	6353003	220	-90	0
Newmont		AC	14	20	6	27.5	37.0	479798	6352999	221	-90	0
Newmont	SZA053	AC	16	23	7	28.2	37.9	479904	6352998	221	-90	0
	and		29	32	3	26.4	35.5					
Newmont		AC	14	23	9	27.8	37.4	480000	6352995	221	-90	0
Newmont		AC	18	36	18	30.8	41.4	480097	6353006	221	-90	0
Newmont		AC	15	32	17	28.9	38.8	480184	6353000	221	-90	0
Newmont		AC	6	20	14	31.9	42.9	478698	6352481	220	-90	0
Newmont		AC	6	20	14	28.3	38.0	478798	6352475	220	-90	0
Newmont		AC	6	15	9	28.1	37.8	478903	6352483	220	-90	0



Newmont SZA062 AC 6		Deposit/ Prospect	Hole ID	Drill Hole Type	From (m)	To (m)	Interval (m)	Ga ppm	Ga2O3 ppm	GDA 94 E	GDA 94 N	Collar DTM	Dip	Azimuth
Newmont SZA063 AC 9 19 12 22 35 2 0 0		Newmont	S7A062	AC	6	9	3	26.6	35.8	478998	6352478	220	-90	0
Newmont SZA063		TOWNION.		7.0						., 5555	0002.70			
Newmont SZA065 AC 7 19 12 33.3 43.4 479301 6352496 220 -90 0 Newmont SZA065 AC 9 13 4 28.8 38.7 479306 8352496 220 -90 0 0 Newmont SZA067 AC 9 21 12 28.5 38.3 4795999 6352490 221 -90 0 0 Newmont SZA068 AC 13 17 4 26.7 36.9 38.8 4797999 6352480 222 -90 0 0 Newmont SZA069 AC 15 30 15 26.6 38.8 4797999 6352485 222 -90 0 0 Newmont SZA071 AC 4 36 32 31.0 41.7 478600 6351997 221 -90 0 0 Newmont SZA073 AC 7 30 23 30.1 40.5 478402 6351997 221 -90 0 0 Newmont SZA073 AC 7 30 23 30.1 40.5 478402 6351998 221 -90 0 0 Newmont SZA073 AC 7 30 23 30.1 40.5 478402 6351998 221 -90 0 0 Newmont SZA073 AC 7 32 25 28.4 38.2 478030 6351997 222 -90 0 0 Newmont SZA073 AC 7 32 25 28.4 38.2 478030 6351997 222 -90 0 0 Newmont SZA073 AC 7 32 25 28.4 38.2 478030 6351997 222 -90 0 0 Newmont SZA073 AC 6 21 15 33.7 45.3 478104 6351997 222 -90 0 Newmont SZA074 AC 6 21 15 33.7 45.3 478104 6351997 222 -90 0 Newmont SZA111 AC 9 30 21 37.4 50.3 479998 6351988 221 -90 0 Newmont SZA114 AC 9 30 21 37.4 50.3 479998 6351988 221 -90 0 Newmont SZA114 AC 9 17 8 33.4 47.6 479198 6351991 220 -90 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479098 6351991 220 -90 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479098 6351991 220 -90 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479098 6351990 220 -90 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479098 6351990 220 -90 0 Newmont SZA113 AC 11 14 3 27.7 37.2 479898 6351990 220 -90 0 Newmont SZA113 AC 11 14 3 27.7 37.2 479899 6351990 220		Newmont		AC						479095	6352486	220	-90	0
Newmont SZA065 AC 9 13 4 22.8 38.7 479396 6352498 220 -90 0 Newmont SZA068 AC 9 21 12 2.85 38.8 479599 6352490 222 -90 0 0 Newmont SZA068 AC 13 17 4 26.7 35.9 479599 6352490 222 -90 0 0 Newmont SZA070 AC 7 36 29 22.8 41.4 476600 6351997 221 -90 0 0 Newmont SZA070 AC 7 36 29 22.8 41.4 476600 6351997 221 -90 0 0 Newmont SZA071 AC 4 36 32 31.0 41.7 478503 6352495 221 -90 0 0 Newmont SZA073 AC 7 30 23 30.1 41.7 478503 6351995 221 -90 0 0 Newmont SZA073 AC 7 30 23 30.1 41.7 478503 6351996 221 -90 0 0 Newmont SZA073 AC 7 32 2.5 28.4 38.2 478302 6351996 221 -90 0 0 Newmont SZA076 AC 8 18 10 29.3 39.4 478009 6352093 223 -90 0 0 Newmont SZA0176 AC 8 18 10 29.3 39.4 478009 6352093 223 -90 0 0 Newmont SZA110 AC 15 20 5 36.3 48.8 479001 6351998 221 -90 0 0 Newmont SZA111 AC 9 30 21 37.4 50.3 479008 6351991 220 -90 0 Newmont SZA113 AC 11 16 5 30.7 41.3 479299 6351991 220 -90 0 Newmont SZA113 AC 11 16 5 30.7 41.3 479299 6351991 220 -90 0 Newmont SZA113 AC 11 16 5 30.7 41.3 479299 6351991 220 -90 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479509 6351993 220 -90 0 Newmont SZA113 AC 11 15 4 25.9 34.8 479509 6351993 220 -90 0 Newmont SZA113 AC 11 15 4 25.9 34.8 479509 6351993 220 -90 0 Newmont SZA124 AC 14 23 9 30.0 40.3 479599 6351993 220 -90 0 Newmont SZA124 AC 14 23 9 30.0 40.3 479599 6351993 220 -90 0 Newmont SZA124 AC 14 23 9 30.0 40.3 479599 6351995 220 -90 0 Newmont SZA124 AC 14 23 9 30.0 40.3 479599 6351995 220 -90 0														0
Newmont SZA067 AC 9 21 12 28.5 38.3 479599 6352490 221 4-90 0														
Newmont SZA068 AC 13 17 4 26.7 35.9 479999 6352490 222 90 0		7											-90	0
Newmont SZA068														0
Newmont SZA070	ŀ													_
Newmont SZA071		_												
Newmont SZA072 AC 7 30 23 30.1 40.5 478402 6351998 221 90 0		- } }												
Newmont SZA073 AC 7 32 25 28.4 38.2 478302 6351996 221 90 0														0
Newmont SZA075 AC 6 21 15 33.7 45.3 478104 6351997 222 90 0 0	61													0
Newmont SZA116 AC S 18 10 29.3 39.4 478009 6352003 223 90 0		- / 										222	-90	0
Newmont SZA110													-90	0
Newmont SZA110 AC 15 20 5 36.3 48.8 479001 6351988 221 -90 0 Newmont SZA111 AC 9 30 21 37.4 50.3 479098 6351991 220 -90 0 0 Newmont SZA112 AC 9 17 8 35.4 47.6 479196 6351991 220 -90 0 0 Newmont SZA113 AC 11 16 5 30.7 41.3 479299 6351991 220 -90 0 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479399 6351991 220 -90 0 0 Newmont SZA115 AC 10 19 9 26.0 34.9 479502 6351993 220 -90 0 0 Newmont SZA116 AC 15 18 3 25.7 34.5 479599 6351995 220 -90 0 0 Newmont SZA117 AC 14 22 9 30.0 40.3 479699 6351990 220 -90 0 Newmont SZA118 AC 14 22 8 27.9 37.5 479803 6351990 222 -90 0 Newmont SZA112 AC 8 22 14 33.8 45.4 478413 6351642 221 -90 0 Newmont SZA122 AC 11 21 10 35.5 47.7 478601 6351626 222 -90 0 Newmont SZA124 AC 9 15 6 28.3 38.0 478799 6351622 223 -90 0 Newmont SZA125 AC 9 12 3 26.3 33.3 47899 6351621 222 -90 0 Newmont SZA126 AC 11 14 3 27.7 37.2 478998 6351621 222 -90 0 Newmont SZA126 AC 11 14 3 27.7 37.2 478998 6351621 222 -90 0 Newmont SZA123 AC 11 27 16 27.2 36.6 479698 6351621 222 -90 0 Newmont SZA131 AC 10 13 3 27.1 36.4 479497 6351620 23 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351566 216 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351566 216 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351505 216 -90 0 Newmont SZA133 AC 20 28 8 29.8 40.1 479804 6351505 216 -90 0 Newmont SZA133 AC 20 28 8 29.8 40.1 479804 6351505 216 -90 0 Newmont SZA133 AC 20 28 8 29.8 40.1 479804 6351503 218 -90 0 Newmont SZA151 AC))					-							
Newmont SZA111		Newmont		AC						479001	6351988	221	-90	0
Newmont SZA112 AC 9 17 8 35.4 47.6 479196 6351991 220 -90 0 Newmont SZA113 AC 11 16 5 30.7 41.3 479299 6351991 220 -90 0 0 Newmont SZA114 AC 11 15 4 25.9 34.8 479399 6351999 220 -90 0 Newmont SZA116 AC 15 18 3 25.7 34.5 479502 6351993 220 -90 0 Newmont SZA116 AC 15 18 3 25.7 34.5 479502 6351995 220 -90 0 Newmont SZA117 AC 14 23 9 30.0 40.3 479699 6351995 220 -90 0 Newmont SZA118 AC 14 22 8 27.9 37.5 479803 6351990 222 -90 0 Newmont SZA124 AC 8 22 14 33.8 45.4 478413 6351642 221 -90 0 Newmont SZA124 AC 9 15 6 28.3 38.0 478799 6351622 223 -90 0 Newmont SZA124 AC 9 15 6 28.3 38.0 478799 6351622 223 -90 0 Newmont SZA129 AC 11 14 3 27.7 37.2 47898 6351622 223 -90 0 Newmont SZA129 AC 11 14 3 27.7 37.2 47898 6351621 222 -90 0 Newmont SZA129 AC 12 24 12 29.0 39.0 479296 6351612 219 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351536 216 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351536 216 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351536 216 -90 0 Newmont SZA133 AC 23 37 14 26.9 36.2 480203 6351493 220 -90 0 Newmont SZA133 AC 23 37 14 26.9 36.2 480203 6351501 220 -90 0 Newmont SZA134 AC 24 30 6 26.7 35.9 480602 6351501 220 -90 0 Newmont SZA134 AC 24 30 6 26.7 35.9 480602 6351501 220 -90 0 Newmont SZA134 AC 24 30 6 26.7 35.9 480602 6351501 220 -90 0 Newmont SZA134 AC 24 30 6 26.7 35.9 480602 6351605 218 -90 0 Newmont SZA150 AC 14 27 13 29.4 39.5 479298 6351003 218 -90 0 Newmont SZA151 AC 7 34 27 33	ŀ										6351991		-90	0
Newmont SZA113													-90	0
Newmont SZA114 AC 11 15 4 25.9 34.8 479399 6351989 220 -90 0 Newmont SZA115 AC 10 19 9 26.0 34.9 479502 6351993 220 -90 0 0 Newmont SZA116 AC 15 18 3 25.7 34.5 479599 6351995 220 -90 0 0 0 0 0 0 0 0 0											6351991		-90	0
Newmont SZA115	(5)						4				6351989	220	-90	0
Newmont SZA116 AC 15 18 3 25.7 34.5 479599 6351995 220 -90 0	7												-90	0
Newmont SZA117 AC 14 23 9 30.0 40.3 479699 6351990 220 -90 0 0														
Newmont SZA117 AC 14 23 9 30.0 40.3 479699 6351990 220 -90 0														
Newmont SZA118 AC 14 22 8 27.9 37.5 479803 6351990 222 -90 0		Newmont		AC						479699	6351990	220	-90	0
Newmont SZA121 AC 8 22 14 33.8 45.4 478413 6351642 221 -90 0										479803			-90	0
Newmont SZA122 AC 11 21 10 35.5 47.7 478601 6351626 222 -90 0													-90	0
Newmont SZA124 AC 9 15 6 28.3 38.0 478799 6351622 223 -90 0	((/	$\overline{}$												0
Newmont SZA125 AC 9 12 3 26.3 35.3 478901 6351627 222 -90 0														0
Newmont SZA126 AC 11 14 3 27.7 37.2 478998 6351621 222 -90 0	20				9		3			478901	6351627	222	-90	0
Newmont SZA129 AC 12 24 12 29.0 39.0 479296 6351612 219 -90 0 Newmont SZA131 AC 10 13 3 27.1 36.4 479497 6351580 219 -90 0 Newmont SZA132 AC 11 27 16 27.2 36.6 479698 6351566 216 -90 0 Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351536 216 -90 0 Newmont SZA137 AC 23 37 14 26.9 36.2 480203 6351493 220 -90 0 Newmont SZA138 AC 21 43 22 26.4 35.5 480300 6351498 221 -90 0 Newmont SZA138 AC 21 43 22 26.4 35.1 and 48 51 3 26.1 35.1 and 58 61 3 26.8 36.0 Newmont SZA139 AC 20 28 8 29.8 40.1 480400 6351501 220 -90 0 Newmont SZA140 AC 22 25 3 25.0 33.6 480500 6351500 218 -90 0 Newmont SZA141 AC 24 30 6 26.7 35.9 480602 6351485 216 -90 0 Newmont SZA150 AC 14 27 13 29.4 39.5 479298 6351497 219 -90 0 Newmont SZA151 AC 13 38 25 25.6 34.4 479199 6351507 220 -90 0 Newmont SZA151 AC 7 34 27 33.3 44.8 478673 6350999 218 -90 0 Newmont SZA155 AC 7 32 25 33.2 44.6 478826 6350999 218 -90 0 Newmont SZA156 AC 7 15 8 30.3 40.7 478896 6351003 218 -90 0 Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0		Newmont			11					478998	6351621	222	-90	0
Newmont SZA131 AC 10 13 3 27.1 36.4 479497 6351580 219 -90 0					12					479296	6351612	219	-90	0
Newmont SZA132 AC 11 27 16 27.2 36.6 479698 6351566 216 -90 0										479497	6351580	219	-90	0
Newmont SZA133 AC 8 26 18 29.8 40.1 479804 6351536 216 -90 0 Newmont SZA137 AC 23 37 14 26.9 36.2 480203 6351493 220 -90 0 Newmont SZA138 AC 21 43 22 26.4 35.5 480300 6351498 221 -90 0 and 48 51 3 26.1 35.1				AC	11	27	16			479698		216	-90	0
Newmont SZA137 AC 23 37 14 26.9 36.2 480203 6351493 220 -90 0 Newmont SZA138 AC 21 43 22 26.4 35.5 480300 6351498 221 -90 0 and 48 51 3 26.1 35.1				AC	8	26	18	29.8	40.1	479804	6351536	216	-90	0
Newmont SZA138 AC 21 43 22 26.4 35.5 480300 6351498 221 -90 0		Newmont	SZA137	AC	23		14	26.9	36.2	480203	6351493	220	-90	0
Newmont SZA139 AC 20 28 8 29.8 40.1 480400 6351501 220 -90 0	(7	Newmont	SZA138	AC	21	43	22	26.4	35.5	480300	6351498	221	-90	0
Newmont SZA139 AC 20 28 8 29.8 40.1 480400 6351501 220 -90 0 Newmont SZA140 AC 22 25 3 25.0 33.6 480500 6351500 218 -90 0 Newmont SZA141 AC 24 30 6 26.7 35.9 480602 6351485 216 -90 0 Newmont SZA150 AC 14 27 13 29.4 39.5 479298 6351497 219 -90 0 Newmont SZA151 AC 13 38 25 25.6 34.4 479199 6351507 220 -90 0 Newmont SZA154 AC 7 34 27 33.3 44.8 478673 6350989 218 -90 0 Newmont SZA155 AC 7 32 25 33.2 44.6 478826 6350999			and		48	51	3	26.1	35.1					
Newmont SZA140 AC 22 25 3 25.0 33.6 480500 6351500 218 -90 0 Newmont SZA141 AC 24 30 6 26.7 35.9 480602 6351485 216 -90 0 Newmont SZA150 AC 14 27 13 29.4 39.5 479298 6351497 219 -90 0 and 33 36 3 25.1 33.7			and		58	61	3	26.8	36.0					
Newmont SZA141 AC 24 30 6 26.7 35.9 480602 6351485 216 -90 0 Newmont SZA150 AC 14 27 13 29.4 39.5 479298 6351497 219 -90 0 and 33 36 3 25.1 33.7 <t< td=""><td></td><td>Newmont</td><td></td><td>AC</td><td></td><td>28</td><td>8</td><td>29.8</td><td></td><td>480400</td><td>6351501</td><td>220</td><td>-90</td><td>0</td></t<>		Newmont		AC		28	8	29.8		480400	6351501	220	-90	0
Newmont SZA150 AC 14 27 13 29.4 39.5 479298 6351497 219 -90 0 and 33 36 3 25.1 33.7	п	Newmont	SZA140	AC	22	25	3	25.0	33.6	480500	6351500	218	-90	0
and 33 36 3 25.1 33.7 Newmont SZA151 AC 13 38 25 25.6 34.4 479199 6351507 220 -90 0 Newmont SZA154 AC 7 34 27 33.3 44.8 478673 6350989 218 -90 0 Newmont SZA155 AC 7 32 25 33.2 44.6 478826 6350999 218 -90 0 Includes 29 31 2 61.3 82.4		Newmont	SZA141	AC	24	30	6	26.7	35.9	480602	6351485	216	-90	0
Newmont SZA151 AC 13 38 25 25.6 34.4 479199 6351507 220 -90 0 Newmont SZA154 AC 7 34 27 33.3 44.8 478673 6350989 218 -90 0 Newmont SZA155 AC 7 32 25 33.2 44.6 478826 6350999 218 -90 0 Includes 29 31 2 61.3 82.4 -90 0 Newmont SZA156 AC 7 15 8 30.3 40.7 478896 6351003 218 -90 0 Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0		Newmont	SZA150	AC	14	27	13	29.4	39.5	479298	6351497	219	-90	0
Newmont SZA154 AC 7 34 27 33.3 44.8 478673 6350989 218 -90 0 Newmont SZA155 AC 7 32 25 33.2 44.6 478826 6350999 218 -90 0 includes 29 31 2 61.3 82.4 -90 0 Newmont SZA156 AC 7 15 8 30.3 40.7 478896 6351003 218 -90 0 Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0			and		33	36	3	25.1	33.7					
Newmont SZA155 AC 7 32 25 33.2 44.6 478826 6350999 218 -90 0 includes 29 31 2 61.3 82.4		Newmont	SZA151	AC	13	38	25	25.6	34.4	479199	6351507	220	-90	0
includes 29 31 2 61.3 82.4 S2A156 AC 7 15 8 30.3 40.7 478896 6351003 218 -90 0 Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0	ľ	Newmont	SZA154	AC	7	34	27	33.3	44.8	478673	6350989	218	-90	0
Newmont SZA156 AC 7 15 8 30.3 40.7 478896 6351003 218 -90 0 Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0		Newmont	SZA155	AC	7	32	25	33.2	44.6	478826	6350999	218	-90	0
Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0	ļ		includes		29	31	2	61.3	82.4					
Newmont SZA157 AC 6 21 15 29.6 39.8 478998 6351003 218 -90 0 Newmont SZA158 AC 7 35 28 29.5 39.6 479100 6350999 219 -90 0	ľ	Newmont	SZA156	AC	7	15	8	30.3	40.7	478896	6351003	218	-90	0
		Newmont	SZA157	AC	6	21	15	29.6	39.8	478998	6351003	218	-90	0
includes 12 13 1 63.6 85.5	ļ	Newmont	SZA158	AC	7	35	28	29.5	39.6	479100	6350999	219	-90	0
<u>, , , , , , , , , , , , , , , , , , , </u>	ļ	_	includes		12	13	1	63.6	85.5					



										0 0 0 0			
	Deposit/ rospect	Hole ID	Drill Hole Type	From (m)	To (m)	Interval (m)	Ga ppm	Ga2O3 ppm	GDA 94 E	GDA 94 N	Collar DTM	Dip	Azimuth
Ne	ewmont	SZA159	AC	11	26	15	32.7	43.9	479200	6351001	219	-90	0
Ne	ewmont	SZA161	AC	18	21	3	25.7	34.5	478586	6348699	221	-90	0
Ne	ewmont	SZA163	AC	43	46	3	25.8	34.7	478573	6348896	223	-90	0
Ne	ewmont	SZA164	AC	21	24	3	25.7	34.5	478545	6349095	224	-90	0
		and		39	42	3	25.6	34.4					
) Ne	ewmont	SZA166	AC	18	28	10	25.8	34.7	478530	6349299	222	-90	0
Ne	ewmont	SZA167	AC	26	29	3	26.7	35.9	478535	6349394	221	-90	0
Ne	ewmont	SZA168	AC	22	28	6	28.3	38.0	478542	6349495	220	-90	0
75		and		34	39	5	28.2	37.9					
J Ne	ewmont	SZA169	AC	11	25	14	26.6	35.8	478539	6349597	220	-90	0
Ne	ewmont	SZA170	AC	8	11	3	25.3	34.0	478517	6349699	220	-90	0
/ Ne	ewmont	SZA171	AC	15	18	3	25.9	34.8	478539	6349800	220	-90	0
□ Ne	ewmont	SZA175	AC	9	18	9	30.2	40.6	478601	6350398	220	-90	0
Ne	ewmont	SZA176	AC	11	17	6	29.1	39.1	478617	6350695	220	-90	0
Ne	ewmont	SZA177	AC	10	26	16	36.7	49.3	478604	6350897	219	-90	0
Ne	ewmont	SZA178	AC	4	18	14	40.3	54.2	478593	6351097	219	-90	0
		includes		7	10	3	58.9	79.2					
		and		24	30	6	25.6	34.4					
Ne	ewmont	SZA181	AC	8	24	16	35.4	47.6	478503	6351641	221	-90	0
Ne	ewmont	SZA183	AC	7	12	5	33.6	45.2	478023	6351601	223	-90	0
Ne	ewmont	SZA184	AC	9	40	31	31.3	42.1	478062	6351398	222	-90	0
Ne	ewmont	SZA185	AC	7	40	33	36.9	49.6	478081	6351299	221	-90	0
Ne	ewmont	SZA186	AC	4	21	17	36.2	48.7	478099	6351201	220	-90	0
Ne	ewmont	SZA187	AC	4	10	6	30.4	40.9	478115	6351102	219	-90	0
Ne	ewmont	SZA188	AC	20	35	15	27.2	36.6	478384	6349299	222	-90	0
Ne	ewmont	SZA189	AC	16	37	21	26.6	35.8	478396	6349102	224	-90	0
//Ne	ewmont	SZA191	AC	25	34	9	28.8	38.7	478431	6348901	224	-90	0
		and		39	42	3	27.1	36.4					
Ne	ewmont	SZA192	AC	29	34	5	29.6	39.8	478436	6348799	222	-90	0
7 SNe	ewmont	SZA193	AC	15	25	10	27.4	36.8	478467	6348701	220	-90	0
J Ne	ewmont	SZA194	AC	19	26	7	27.5	37.0	478494	6348599	220	-90	0
Ne	ewmont	SZA198	AC	21	25	4	25.8	34.7	478201	6347887	218	-90	0
Ne	ewmont	SZA200	AC	28	37	9	26.5	35.6	478017	6347867	218	-90	0
Ne	ewmont	SZA201	AC	30	33	3	28.9	38.8	478003	6347803	220	-90	0
Ne	ewmont	SZA202	AC	24	59	35	25.7	34.5	477999	6347400	223	-90	0
Ne	ewmont	SZA203	AC	24	52	28	30.4	40.9	478014	6347197	223	-90	0
		includes	<u> </u>	25	30	5	47.4	63.7					
	ewmont	SZA204	AC	23	51	28	25.8	34.7	478023	6347000	222	-90	0
	ewmont	SZA205	AC	27	32	5	27.6	37.1	478047	6346598	223	-90	0
Ne	ewmont	SZA215	AC	23	26	3	25.4	34.1	478071	6342595	226	-90	0
		and		30	39	9	32.8	44.1	47005	00.100.5	60:		
	ewmont	SZA221	AC	22	25	3	25.7	34.5	478037	6340200	224	-90	0
	ewmont	SZA222	AC	26	39	13	27.3	36.7	478201	6347450	225	-90	0
Ne	ewmont	SZA223	AC	14	24	10	27.0	36.3	478301	6349000	223	-90	0
		and		36	39	3	25.6	34.4	470500	00.4000=	005	20	
	ewmont	SZA224	AC	21	26	5	26.9	36.2	478500	6349005	225	-90	0
	ewmont	SZA225	AC	27	44	17	27.2	36.6	478595	6349007	224	-90	0
	ewmont	SZA226	AC	21	24	3	26.1	35.1	478700	6349002	223	-90	0
	ewmont	SZA227	AC	19	22	3	26.9	36.2	478796	6349002	222	-90	0
	ewmont	SZA230	AC	23	47	24	27.5	37.0	479098	6348990	222	-90	0
Ne	ewmont	SZA231	AC	27	30	3	27.0	36.3	479199	6348996	222	-90	0



	Deposit/ Prospect	Hole ID	Drill Hole Type	From (m)	To (m)	Interval (m)	Ga ppm	Ga2O3 ppm	GDA 94 E	GDA 94 N	Collar DTM	Dip	Azimuth
	Newmont	SZA232	AC	23	26	3	25.5	34.3	479292	6349003	222	-90	0
	Newmont	SZA234	AC	11	23	12	25.2	33.9	478599	6349501	221	-90	0
	Newmont	SZA235	AC	22	29	7	27.0	36.3	478698	6349500	221	-90	0
	Newmont	SZA236	AC	16	44	28	28.6	38.4	478800	6349495	221	-90	0
	Newmont	SZA237	AC	13	22	9	26.6	35.8	478895	6349489	221	-90	0
	Newmont	SZA238	AC	19	33	14	30.2	40.6	479000	6349493	221	-90	0
	Newmont	SZA239	AC	27	32	5	26.2	35.2	479100	6349495	221	-90	0
	Newmont	SZA240	AC	18	33	15	26.4	35.5	479199	6349497	220	-90	0
	Newmont	SZA243	AC	15	32	17	29.2	39.2	478797	6349999	220	-90	0
\cup	<u> </u>	and		37	40	3	30.6	41.1					
		and		49	53	4	26.5	35.6					
(())	Newmont	SZA244	AC	19	71	52	26.3	35.3	478873	6350000	221	-90	0
	Newmont	SZA246	AC	19	22	3	25.4	34.1	478801	6350499	221	-90	0
	Newmont	SZA247	AC	16	42	26	30.0	40.3	478901	6350494	220	-90	0
	Newmont	SZA248	AC	16	64	48	27.6	37.1	478999	6350501	220	-90	0
	Newmont	SZA249	AC	16	23	7	26.8	36.0	479082	6350504	220	-90	0
		and		40	43	3	26.3	35.3					
		and		64	67	3	28.9	38.8					
(\cap)	Newmont	SZA250	AC	7	12	5	29.3	39.4	479301	6351017	218	-90	0
01		and		18	29	11	28.8	38.7					
	Newmont	SZA251	AC	9	38	29	28.3	38.0	479399	6351003	218	-90	0
22	Newmont	SZA252	AC	9	36	27	29.8	40.1	479505	6350996	218	-90	0
	Newmont	SZA253	AC	11	43	32	37.4	50.3	478601	6351703	222	-90	0
	Newmont	SZA254	AC	6	10	4	30.3	40.7	478599	6352102	221	-90	0
	<u> </u>	and		16	19	3	29.8	40.1					
01		and		23	27	4	28.6	38.4					
	Newmont	SZA256	AC	7	26	19	28.1	37.8	478603	6352298	221	-90	0
$\overline{\mathcal{I}}$	Newmont	SZA257	AC	9	19	10	29.0	39.0	478596	6352403	220	-90	0
	Newmont	SZA261	AC	14	18	4	37.9	50.9	478597	6352902	220	-90	0
	Newmont	SZA263	AC	30	34	4	34.2	46.0	477813	6351502	223	-90	0
U	Newmont	SZA265	AC	3	12	9	26.6	35.8	477900	6350997	217	-90	0
	Newmont	SZA266	AC	1	5	4	28.3	38.0	477800	6350996	218	-90	0
((Newmont	SZA268	AC	6	25	19	29.5	39.6	477603	6351005	219	-90	0
		and		28	31	3	26.5	35.6					
	Newmont	SZA269	AC	14	27	13	31.6	42.5	477514	6351003	220	-90	0
2	Newmont	SZA272	AC	7	24	17	28.4	38.2	477799	6350508	222	-90	0
	Newmont	SZA275	AC	3	22	19	29.0	39.0	477373	6350004	219	-90	0
	Newmont	SZA276	AC	3	25	22	27.0	36.3	477350	6350004	219	-90	0
	Newmont	SZA277	AC	6	11	5	30.8	41.4	477419	6349997	219	-90	0
Пп		and		16	19	3	26.4	35.5	4==00:	00 10 15 5	605		
	Newmont	SZA280	AC	7	12	5	29.3	39.4	477601	6349486	222	-90	0
	Newmont	SZA281	AC	13	17	4	29.4	39.5	477552	6349489	222	-90	0
	Newmont	SZA282	AC	24	30	6	27.5	37.0	477627	6348996	223	-90	0
	Newmont	SZA284	AC	40	48	8	25.3	34.0	479202	6350506	220	-90	0
	NI.	and		51	55	4	26.3	35.3	47005	0050555	606		
	Newmont	SZA285	AC	24	27	3	25.3	34.0	479307	6350503	220	-90	0
	Newmont	SZA286	AC	21	26	5	25.5	34.3	479401	6350502	220	-90	0
	Newmont	SZA292	AC	28	31	3	27.3	36.7	480005	6350500	219.5	-90	0
	Newmont	SZA293	AC	22	30	8	29.6	39.8	480106	6350499	219.5	-90	0
	Newmont	SZA296	AC	11	21	10	37.1	49.9	478453	6351499	220	-90	0
	Newmont	SZA297	AC	10	22	12	30.2	40.6	478359	6351500	219	-90	0



1463			Control of the Contro	Sec. Market	MAN DE	escharia en	CARL AND STREET					COMMENT N	MARKOT MARK
	Deposit/ Prospect	Hole ID	Drill Hole Type	From (m)	To (m)	Interval (m)	Ga ppm	Ga2O3 ppm	GDA 94 E	GDA 94 N	Collar DTM	Dip	Azimuth
	Newmont	SZA298	AC	8	25	17	30.1	40.5	478060	6350998	217.5	-90	0
	Newmont	SZA299	AC	8	43	35	29.9	40.2	478348	6351002	217.5	-90	0
	Newmont	SZA302	AC	27	58	31	27.5	37.0	477499	6347898	220.5	-90	0
	Newmont	SZA303	AC	13	30	17	27.7	37.2	477401	6347896	219	-90	0
	Newmont	SZA306	AC	9	21	12	36.4	48.9	477100	6347897	217.5	-90	0
	Newmont	SZA307	AC	12	21	9	36.8	49.5	477004	6347896	218	-90	0
	Newmont	SZA308	AC	13	16	3	26.0	34.9	476904	6347899	222	-90	0
	Newmont	SZA309	AC	19	23	4	25.5	34.3	476804	6347898	224	-90	0
	5												
	Matilda South	SZA313	AC	49	54	5	27.8	37.4	472698	6339752	216.5	-90	0
	Matilda South	SZA317	AC	21	30	9	27.1	36.4	471901	6339755	217	-90	0
	Matilda South	SZA318	AC	37	40	3	25.3	34.0	471702	6339754	218	-90	0
	Matilda South	SZA319	AC	20	23	3	27.3	36.7	471503	6339756	216	-90	0
	Matilda South	SZA322	AC	17	20	3	26.0	34.9	470902	6339754	215.5	-90	0
))	OLI IOZZ	7.0	1,			20.0	0 1.0	170002	0000701	210.0		
	Newmont South	SZA330	AC	21	26	5	28.2	37.9	475494	6345000	216	-90	0
	O'Connor	SZA077	AC	18	29	11	26.8	36.0	488703	6336082	222.0	-90	0
	O'Connor	SZA077	AC	11	18	7	37.5	50.4	488900	6335862	222.0	-90	0
	O'Connor	SZA078	AC	8	11	3	39.9	53.6	489100	6335638	222.0	-90	0
						1			489100	0333036	222.0	-90	0
	O'Connor O'Connor	includes SZA080	AC AC	10 7	11 22	15	68.0 29.2	91.4 39.2	489302	6335212	222.0	-90	0
						9			488800	6333976	222.0	-90	0
	O'Connor	SZA081	AC	20	29	-	35.7	48.0	487803		222.0	-90	0
	O'Connor	SZA088	AC	9	12	3	25.3	34.0	467603	6333295	222.0	-90	U
	010	and	40	28	31		25.1	33.7	487594	6333154	222.0	00	0
	O'Connor	SZA089	AC	10	13	3	25.3	34.0				-90	0
	O'Connor	SZA090	AC	3	7	4	36.1	48.5	487398	6333022	222.0	-90	0
	010	includes	4.0	3	4	1	50.6	68.0	407400	0000000	000.0	00	
	O'Connor	SZA091	AC	14	18	4	25.0	33.6	487198	6332886	222.0	-90	0
)	and		22	27	5	25.9	34.8					
	010	and		36	39	3	27.0	36.3	400400	0000040	000.0	00	
	O'Connor	SZA094	AC	16	41	25	28.6	38.4	486492	6332348	222.0	-90	0
	O'Connor	SZA095	AC	13	16	3	34.7	46.6	486203	6332213	222.0	-90	0
	O'Connor	SZA098	AC	22	35	13	31.0	41.7	485600	6331805	222.0	-90	0
	O'Connor	SZA102	AC	17	20	3	27.9	37.5	484802	6331267	222.0	-90	0
	O'Connor	SZA103	AC	12	21	9	29.4	39.5	484600	6331124	222.0	-90	0
	O'Connor	SZA105	AC	33	38	5	46.1	62.0	490920	6332598	222.0	-90	0
		and		45	48	3	26.7	35.9					
	Talket	TOVD COOL	D.C.	40	F.4	6	07.0	00.0	407004	0000004	004.5		00
	Talisker	TSKRC001	RC	48	51	3	27.0	36.3	487091	6366301	221.5	-60	90
	Talisker	TSKRC004	RC	36	48	12	25.5	34.3	487170	6366430	224.0	-60	5
	Ola :	OMODOSSS	5.0			4.0	F0 -	 -	470077	00.105=5	007.5		
	Glenmorangie	GMGRCP001	RC	3	15	12	56.0	75.3	470870	6349870	237.0	-60	3
		includes		6	9	3	108.0	145.2					



JORC Code, 2012 Edition - Table 1 report template

Section 1 Sampling Techniques and Data

Criteria	section apply to all succeeding sections.) JORC Code explanation	Commentary
Criteria	JORC Code explanation	Commentary
Sampling techniques	 Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	 For the December 2022 to January 2023 Phase 1 drill program, samples were taken every drilled meter from an air core (AC) drill rig with sample cyclone. The cyclone sample in total was collected in a plastic RC bag. Samples for assay were around 1kg and taken from every 1m AC drill interval collected by mixing and scooping from the RC bag into a calico bag. For the December 2022 to January 2023 Phase 1 drill program, entire 1kg samples were pulverized in the laboratory to produce a small charge for lithium borate fusion/ICP assay. For the May-June 2024 Phase 2 air core drill program, entire 1kg samples were pulverized in the laboratory to produce a small charge for sodium peroxide fusion/ICP assay. For the 2025 RC drill program, samples were collected every drilled meter from the drill rig with sample cyclone. Cyclone samples were collected in full and deposited on the ground individually in rows. 3m composite samples of about 3kg for assay were taken with a pipe tube into a calico bag. Sampling in every case was supervised by an experienced geologist. A blank sample and duplicate sample were inserted for every hole. The laboratory also inserted QAQC samples, including Certified Reference Material (CRM) (see Quality of assay data and laboratory tests). Historical holes' sampling techniques are described in West Cobar's ASX announcement of 8 September 2022
Drilling techniques	 Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	 Drill type was air core, drilled by Drillpower (phase 1) and Strike Drilling (Phase 2). using blade and hammer industry standard drilling techniques. Drilling used blade bits of 87mm with 3m length drill rods to blade refusal, or bedrock



NE ANNELA DES	Criteria	JORC Code explanation	Commentary
	5		chips obtained. • RC drilling in 2025 - Nexgen Drilling used a
			Schramm T450 track mounted Reverse Circulation (RC) drill rig with 146mm diameter face sampling hammer.
			Historical holes' drilling techniques are described in West Cobar's ASX announcement of 8 September 2022
1D)	Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 Sample quality and recovery were recorded in comments on log and sample sheets. The sample data was entered into an Excel sample log sheet. Sample recovery was typically of a high standard. The assays, were compared against historical data and no indications of sampling or analytical bias were obtained
	Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	 Every 1m interval of the material drilled was geologically examined and logged (colour, grain size, quartz content, clay content and type) and intervals of similar geology grouped and zones of transported and insitu regolith identified (soil, calcrete, transported clay, transported sand, upper and lower saprolite types, saprock). All intervals, including end of hole 'fresh' basement chips saved in chip trays. Basement chips geologically logged (geology, structure, alteration, veining and mineralisation).
	Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance 	 No drill core. AC drill samples mostly dry clayey powders with varying quartz grain content and rare chips, collected from AC sample cyclone complete, every meter, into plastic RC bags weighing 8-12kg. Sub-samples for assay (1-2kg) collected by hand every 1m by mixing RC bag contents and scooping into a calico bag. Samples mostly dry, with damp or wet intervals recorded. The sample type and method were of an appropriate standard for AC drilling.



CHANCAL CO.	Criteria	JORC Code explanation	Commentary
		results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled.	 A CRM, blank and duplicate were inserted at regular intervals in the sample stream. RC drill samples of chips and powder collected from RC sample cyclone and deposited on the ground. Sub-samples for assay (1kg) collected every 1m by pipe sampling. Samples composited to 3m intervals (total 3kg). Samples mostly dry, with damp or wet intervals recorded. The sample type and method were of an appropriate standard for exploration RC drilling.
	Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	 AC samples assayed by Bureau Veritas Minerals laboratory (Phase 1) and NAGROM laboratory (Phase 2) for rare earth elements and a selection of multi-elements using lithium borate fusion (Phase 1) and sodium peroxide fusion (Phase 2) followed by rare earth and multi-element analysis with ICP- AES (Inductively coupled plasma atomic emission spectroscopy) or ICP-MS (Inductively coupled plasma mass spectrometry) analysis - dependent on element being assayed and grade ranges. The fusion techniques are considered total assays of non-refractory and refractory minerals, with lithium borate or sodium peroxide fusion assay most suitable for rare earth elements. RC composite samples were sent to NAGROM laboratory Assayed for Au, Pt, Pd, Ag, As, Ce, Ga, In, Pb, Re, Sb, Sc, Al, Ba, Ca, Co, Cu, Fe, K, Mg, Mn, Na, Ni, P, S, Sr, Ti, Zn, Zr (Four acid digest + ICP) Selected near surface samples in saprolite were analysed for Ce, Dy, Er, Eu, Gd, Ho, La, Lu, Nb, Nd, Pr, Sm, Ta, Tb, Th, Tm, U, Y, and Yb by peroxide fusion and ICP-OES or ICP-MS. The laboratory inserted duplicates and QAQC samples, including Certified Reference Material (CRM) (see Quality of assay data and laboratory testing are described in West Cobar's ASX announcement of 8 September 2022



	LOSSES AND THE SHOP WAS TO SEE	The state of the s
Criteria	JORC Code explanation	Commentary
Verification of sampling and assaying	·	· ·
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic 	Lutetium Lu ₂ O ₃ 1.137 Yttrium Y ₂ O ₃ 1.269 Rare earth oxide is the industry accepted form for reporting rare earths. Other elements quoted as oxides and other compounds in this announcement have the following element-to- stoichiometric ratio factors: Element Oxide Ratio Scandium Sc ₂ O ₃ 1.534 Aluminum Al ₂ O ₃ 1.890 (alumina) Titanium TiO ₂ 1.668 Gallium Ga ₂ O ₃ 1.344 Holes pegged and picked up with handheld GPS (+/- 3m northings and eastings) sufficient for drill spacing and the regolith targeted. No downhole surveys conducted as all holes vertical. The grid system is MGA_GDA94, zone 51. Elevations interpreted from DEMs. Adequate



260	Criteria	JORC Code explanation		Commentary
	Data specina	control.	•	(+/-0.5m) for the relatively flat terrain drilled. A north seeking gyro was used for downhole surveys with the RC drilling every 10m
	Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	•	Drill and sample spacing was based on expected depth of weathering, regolith target thickness, transported overburden, saprolite and saprock thickness, basement geological unit and REE distribution. Drillhole spacing at Newmont (500m spaced east west lines x 100m collar spacing, with two north south lines, 100m collar spacing) suitable for Indicated and Inferred Mineral Resource reporting. Sample spacing in southern part of E63/1496 and E63/2056 and 2078 was 200m to 400m, for exploration only, and is not sufficient for Mineral Resource reporting. Every meter drilled was screened qualitatively with a portable XRF, and meter samples with potentially significant REE, Ti or Cu values were selected for assay. No compositing was carried out for these air core drilling programs For the RC drill program, reconnaissance drill spacing based on interpretations of individual geophysical targets.
	Orientation of data in relation to geological structure	 achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to 	•	All aircore drillholes were vertical. Given the shallow depth of the drill holes, subhorizontal layering in the regolith and drill spacing of 50-100m, any deviation is unlikely to have a material effect on the work completed. All RC holes drilled with dip of -60deg
))		have introduced a sampling bias, this should be assessed and reported if material.		anticipating steeply dipping foliation and lithology structure but any bias due to the orientation of the drilling is unknown at this early stage of exploration
	Sample security	The measures taken to ensure sample security.	•	Chain of custody was managed by operators West Cobar Metals (2022/23) and Salazar Gold (2015 & 2012). All calico bags were transported to the camp site after the hole was rehabilitated. At the camp the calico samples were sorted by hole number into bulka bags and loaded onto pallets for



Criteria	JORC Code explanation	Commentary
Criteria	JORC Code explanation	dispatch to Freight Lines depot for dispatch directly to Bureau Veritas. The large plastic bags of the residual sample collected by the drill were stored temporarily on the ground on-site. Once assays were received selected bags of residual samples were transported to the Wandi shed (near Perth), or other suitable site in bulka bags for storage (for resampling, further analysis and metallurgical testwork) and the remainder left on site for burial. Close communication was maintained between site, the destination, and Esperance Freight Lines to ensure the safe arrival and timely delivery to Bureau Veritas laboratory in Kalgoorlie. Contact was made with Bureau Veritas by email on the sample delivery, sample sorting and sample submission sheets. After assay pulps were stored at Bureau Veritas until
		final results had been fully interpreted then disposed of or transported to the Wandi shed.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	REE data reviewed by resource consultants CSA Global (2015) and AMC Consultants (2023, 2024).

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 E63/1496 and E63/1469 including the Newmont and O'Connor deposits and prospects is 100% owned by Salazar Gold Pty Ltd, a wholly owned subsidiary of West Cobar Metals Ltd. It is located 120km NE of Esperance on Vacant Crown Land. The Ngadju Native Title Claim covers the E63/1496 in its entirety and the northern section of E63/1469, and Salazar Gold has entered into a Regional Standard Heritage Agreement. The majority of E63/2056, E63/2083, E63,2078 and E63/2063, 100% owned by West Cobar Metals Ltd, lie within the Ngadju Native Title Claim for which West Cobar Metals has entered into Heritage Protection Agreements.



Criteria	JORC Code explanation	Commentary
		 The Esperance Nyungars Native Title Claim covers around 17% of the southern portion of E63/2056 The drilling included in this ASX release is all located within the Ngadju Native Title Claim. All tenements are in good standing and no known impediments exist outside of the usual course of exploration licences.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	 Prior work on E63/1496 and E63/1469 carried out by Azure Minerals Limited in the Newmont area included aerial photography, calcrete, soil and rock chip sampling, airborne magnetic-radiometric-DTM survey, gravity survey, an IP survey, and AC, RC drilling.
		 BHP-Billiton carried out a wide spaced calcrete sampling program in 2002/2003 covering parts of E63/2078 and E63/2063. Goldport Pty Ltd carried out exploration for gold and copper in the area mostly covered by E63/2056 and E63/2063 in 2006 to 2008 but did not analyse for REEs.
		 In 2012, Anglogold Ashanti drilled 221 aircore holes in a small part of the southern portion of E63/2063 for gold exploration and analysed for REEs of bedrock end of hole interval only.
		 Salazar Gold Pty Ltd, prior to acquisition by West Cobar Metals Ltd, carried out extensive exploration, including air core drilling and VTEM surveys. Geophysical surveys, including SkyTEM AEM
		and gravity surveys were carried out by Dundas Minerals on parts of E63/5026, E63/2083, E63,2078 and E63/2063 in 2021. RC and diamond drilling on of E63/2056 and E63/2078 was conducted by Dundas Minerals Ltd during 2022 and 2023.
Geology	Deposit type, geological setting and style of mineralisation.	Exploration is targeting regolith hosted REE- Sc-TiO2-Ga enriched saprolitic clay deposits within the Nornalup Zone of the Albany Fraser Orogen where the saprolite-saprock target regolith horizon interacts with REE enriched ortho-amphibolite, tonalite and Esperance Granite Supersuite granites and structural complexities.



N. C.	The second second	
Criteria	JORC Code explanation	Commentary
Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	 All drill results are reported to the ASX in accordance with the provisions of the JORC Code All drill hole collar details for drill holes containing intersections >3m and above a 25ppm Ga cut-off, are listed in Appendix 1.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	 No metal equivalent values are used for reporting exploration results. Multielement results (REE) are converted to stoichiometric oxide (REO) using element-to-stoichiometric conversion ratios. These stoichiometric conversion ratios are stated in the 'verification of sampling and assaying' table above and can be referenced in appropriate publicly available technical data Results presented as length weighted average grades with no cutting of high grades
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	 Due to the sub-horizontal distribution and orientation of the regolith hosted mineralised trend the vertical orientation of drill holes is not believed to bias sampling. Drilled width is approximately true width Where RC drill holes are drilled at an angle of 60deg the true width may be less than the intersection width.
Diagrams	Appropriate maps and sections (with	Maps included in main body of this



Criteria	JORC Code explanation	Commentary
5	scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	announcement
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	All drillhole results have been reported that contain gallium assay results using 25ppm Ga cut-off within the saprolite layer (Appendix 1).
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples — size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	 The Indicated and Inferred Mineral Resource at Newmont (REE, TiO2, Sc, and alumina) and the Inferred Mineral Resource at O'Connor (REE) were reported in the ASX announcement of 8 October 2024. Since 2011 Salazar has commissioned several studies to investigate the mineralogy and extractability of the REE's by Townend Mineralogy, metallurgical laboratories Amdel (2011-2015), Nagrom (2015-2022) and TSW Analytical P/L (TSW) now Source Certain International (SCI) (2017-2020) and research groups from University of WA, CSIRO (2015-2019) and other tertiary institutions. Testwork by Nagrom in 2016 - Hydrometallurgical Report for Salazar Gold Pty Ltd Batch number T2118 (confidential report to Salazar Gold Pty Ltd) considered gallium extraction and details are included in this announcement.
Further work	 The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	 Gallium will be incorporated into the MRE's for Newmont and O'Connor. Future air core programs may include infill holes in the central part of Newmont, to provide more gallium analyses data.