

ASX ANNOUNCEMENT
12 November 2025

FIRST DRILL RESULTS EXTEND GOLD MINERALISATION AT LONE SISTER

GBM Resources Limited (ASX: GBZ) ("GBM" or "the Company") is pleased to advise that it has received assay results from two of three drillholes from the first drilling program at the Lone Sister deposit, within the Company's Twin Hills Gold Project (~1.0Moz Mineral Resource Estimate ("MRE")) in the Drummond Basin, Queensland.

Following the restructuring of GBM in August 2025, the Company has commenced a substantial drilling campaign at Twin Hills, designed to grow the existing resource base and follow-up high-priority extensions at both the 309 and Lone Sister deposits, as well as test new regional targets.

Highlights:

- LSDH002 intersected broad, high-grade mineralisation **outside of the existing MRE**. Significant assays results outside of the existing MRE include:
 - **52m @ 2.77g/t Au** from 299m.
 - **14m @ 1.19g/t Au** from 60m including:
 - **2m @ 4.71g/t Au** from 67m.

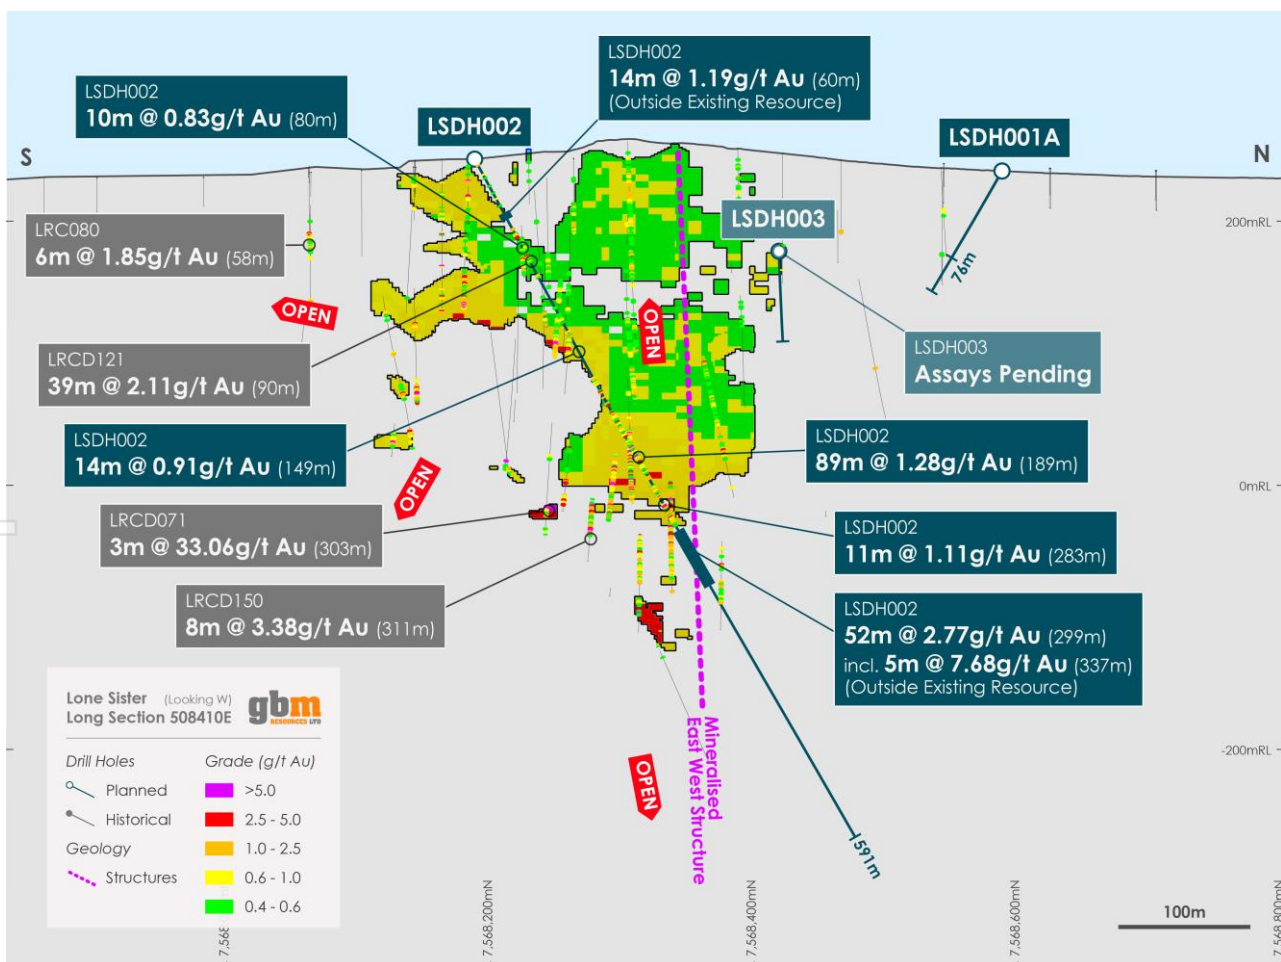


Figure 1 – Long section view of LSDH002 drilled at the Lone Sister deposit.

- These results lay within a broader zone of **181.7m @ 1.55g/t Au** from 189m¹, including **89m @ 1.28g/t Au** from 189m, and contains a peak gold interval of **1m @ 43.04g/t Au** from 300m which also lies outside of the existing MRE.
- Both holes additionally confirmed a newly interpreted east-west structure associated with **high-grade gold mineralisation** and supports the continuity of this high-grade interpreted structure. The structure had not previously been identified or targeted.
 - **5m @ 7.68g/t Au** from 337m in LSDH002
 - **10m @ 4.33g/t Au** from 442m in LSDH001A including:
 - **5m @ 6.18 g/t Au** from 446m.
- Two distinct styles of high-grade gold mineralisation at Lone Sister have now been identified;
 - quartz vein low sulphidation epithermal, and,
 - a newly identified mineralised rhyolite more typical of intrusive-related gold mineralisation.

The first ever north to south (LSDH001A) and south to north (LSDH002) orientated drill holes at Lone Sister provided significant geological information and a new interpretation of the controls on mineralisation. Assays are pending for the third extensional hole (LSDH003), and an additional hole is now planned at Lone Sister to continue to assess high-grade mineralisation continuity of the interpreted east-west structure.

Additionally, circa 1,500m of the planned 6,550m drilling program has been completed to date at the 309 deposit, with initial assay results awaited.

GBM Chief Executive Officer, Daniel Hastings, commented:

"These drill holes and positive assay results are very exciting and have delivered an increased understanding of the Lone Sister deposit. The high-grade intercepts outside of the current MRE are significant and will inform an updated mineralisation model. The new drilling orientation has confirmed high-grade mineralisation associated with a newly identified structure and the occurrence of intrusive-related gold mineralisation highlights opportunities for us to target resource growth from both within and outside the current MRE."

For further information please contact:

Daniel Hastings

Chief Executive Officer

+61 (0) 493 239 674

dhastings@gbmex.com.au

Andrew Krelle

Executive Director

andrew.krelle@gbmex.com.au

¹ Significant assay results have been calculated using an Au cutoff grade of 0.4g/t Au in line with the cutoff grade used for reporting Mineral Resources. Allowable internal dilution is 4m. The broader zone interval includes a larger allowable internal dilution of 5m. Where a significant assay result is referred to as being included as part of a larger interval, an Au cutoff grade of 2.0g/t Au has been used, and allowable internal dilution is 2m.

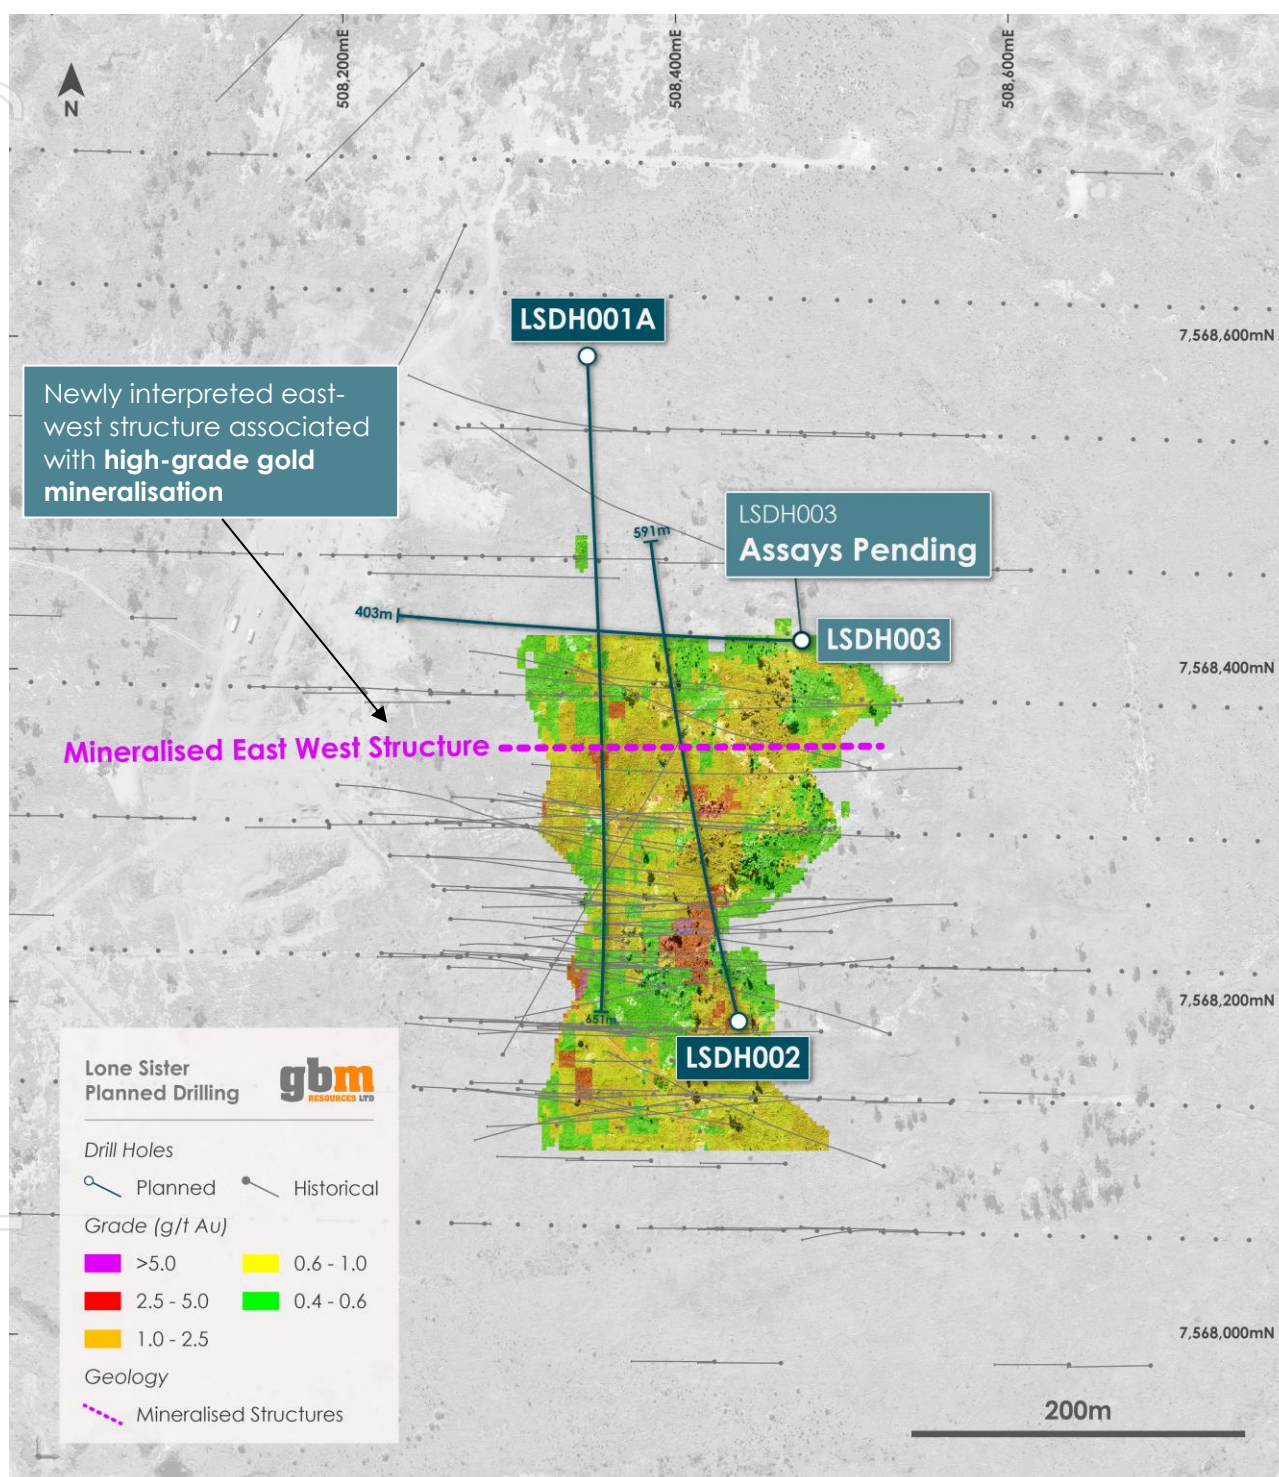


Figure 2 – Plan view of the Stage 1 holes drilled at the Lone Sister deposit.

Lone Sister

The initial holes drilled at Lone Sister (**MRE of 12.4Mt @ 1.2g/t Au for 0.48Moz**) comprised of two mineralisation extension holes (assays for LSDH003 pending) outside of the currently defined MRE and one metallurgical / multi-target drillhole. 1,645m of a planned 2,160m of reverse circulation ("RC") and diamond drilling has been completed. The program successfully aimed to provide infill drilling and testing of lateral and the down-plunge extension of high-grade mineralisation hosted within a rhyolite dome and its associated breccia complex.

LSDH002 was drilled in a south to north orientation and aimed to intersect infill mineralisation, provide material for metallurgical test work comprising various grades and oxidation states, and also test an interpreted East-West structure with high-grade gold mineralisation. Significant assays results from this hole include:

- **14m @ 1.19g/t Au** from 60m including:
 - **2m @ 4.71g/t Au** from 67m
- 10m @ 0.83g/t Au from 80m including:
 - 1m @ 2.78g/t Au from 83m
- **89m @ 1.28g/t Au** from 189m including:
 - **1m @ 31.67g/t Au** from 249m
- 11m @ 1.11g/t Au from 283m including:
- **52m @ 2.77g/t Au** from 299m including:
 - **3.2m @ 15.36g/t Au** from 300m
 - 2m @ 11.21g/t Au from 329m
 - **4m @ 9.23g/t Au** from 338m

Both LSDH001A and LSDH002 were also designed to contribute core for detailed lithological and alteration studies, which will improve understanding of fluid pathways and their role in localising high-grade shoots.

LSDH001A was the first hole to be drilled in a north to south orientation and provided significant geological information leading to an updated interpretation of the controls on mineralisation at Lone Sister. This drillhole successfully intersected targeted mineralisation approximately **20m** off the deepest existing intercept that informs the MRE at Lone Sister. This intercept displays continuation of the higher-grade ore shoot and is expected to extend the deposit both upwards and at depth. Significant assays results² from this hole include:

- 6m @ 0.56g/t Au from 138m
- **10m @ 4.33g/t Au** from 442m including:
 - 2m @ 5.05g/t Au from 442m
 - 5m @ 6.18g/t Au from 446m
- 1m @ 2.97g/t Au from 459m

This intersect is a heavily mineralised east-west structure assumed at this stage to be a rhyolite dyke with unique geochemistry (La, Ce, Y, Zr) cross-cutting older rhyolitic units. This style of mineralisation is typical of intrusive related gold mineralisation and suggests a more extensive and consistent mineral resource domain. The mineralised rhyolite suggests additional high-grade gold mineralisation could extend at depth beneath the current MRE. This is coupled with the high-grade low sulphidation epithermal style of mineralisation also seen at Lone Sister.

Upon completion of the third drill hole at Lone Sister (LSDH003) a diamond extension tail of 62.5m was added to LSDH001A from the original end-of-hole at 588.9m to 651.4m to add geological understanding and assess alteration mineralogy. Assays for this diamond tail are pending.

² Significant assay results have been calculated using an Au cutoff grade of 0.4g/t Au in line with the cutoff grade used for reporting Mineral Resources. Allowable internal dilution is 4m. Where a significant assay result is referred to as being included as part of a larger interval, an Au cutoff grade of 2.0g/t Au has been used, and allowable internal dilution is 2m.

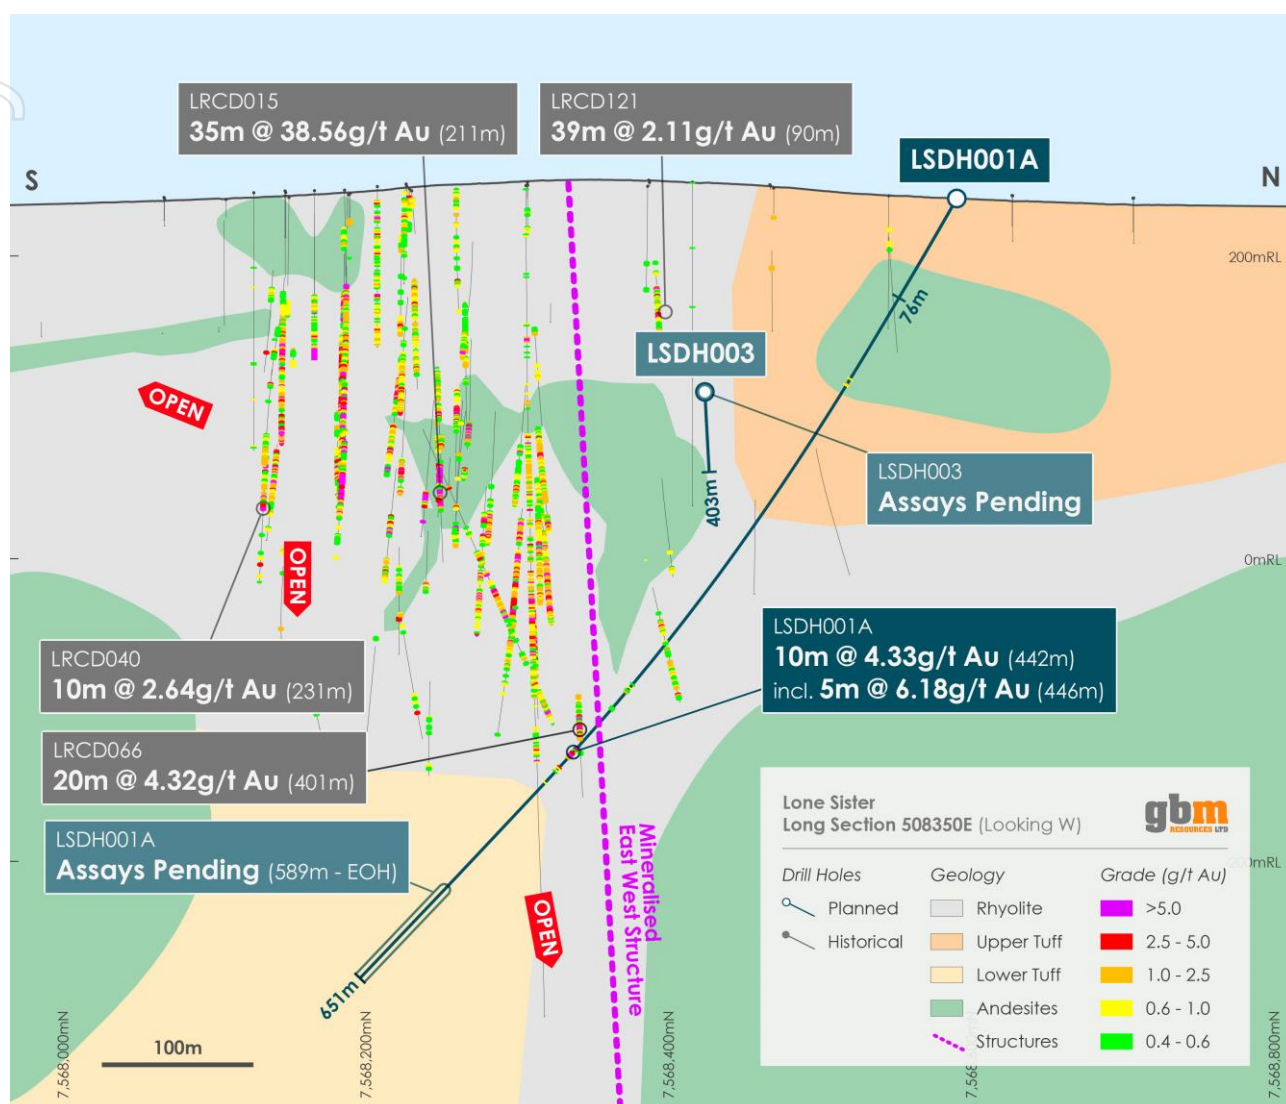


Figure 3 – Long section view of LSDH001A drilled at the Lone Sister deposit.

The third hole (LSDH003) was drilled outside of the current MRE on an east/west orientation to demonstrate lateral extensions to mineralisation. Assays for this hole are currently pending.

309 Deposit

At the **309 deposit**, approximately 6,550m of RC and diamond drilling is underway with approximately 1,500m drilled to date. The program is designed to test the continuity of high-grade quartz-sulphide mineralisation both along strike and down plunge of the main ore shoot. Step-out holes will target poorly drilled structural positions identified in 3D modelling, where mineralisation remains open and untested. In addition, areas of widely spaced historic drilling will be infilled to target resource growth and allow for improved confidence in future resource estimations. The 309 deposit contains an existing MRE of **10.6Mt @ 1.5g/t Au for 0.52Moz** (open pit & underground combined).

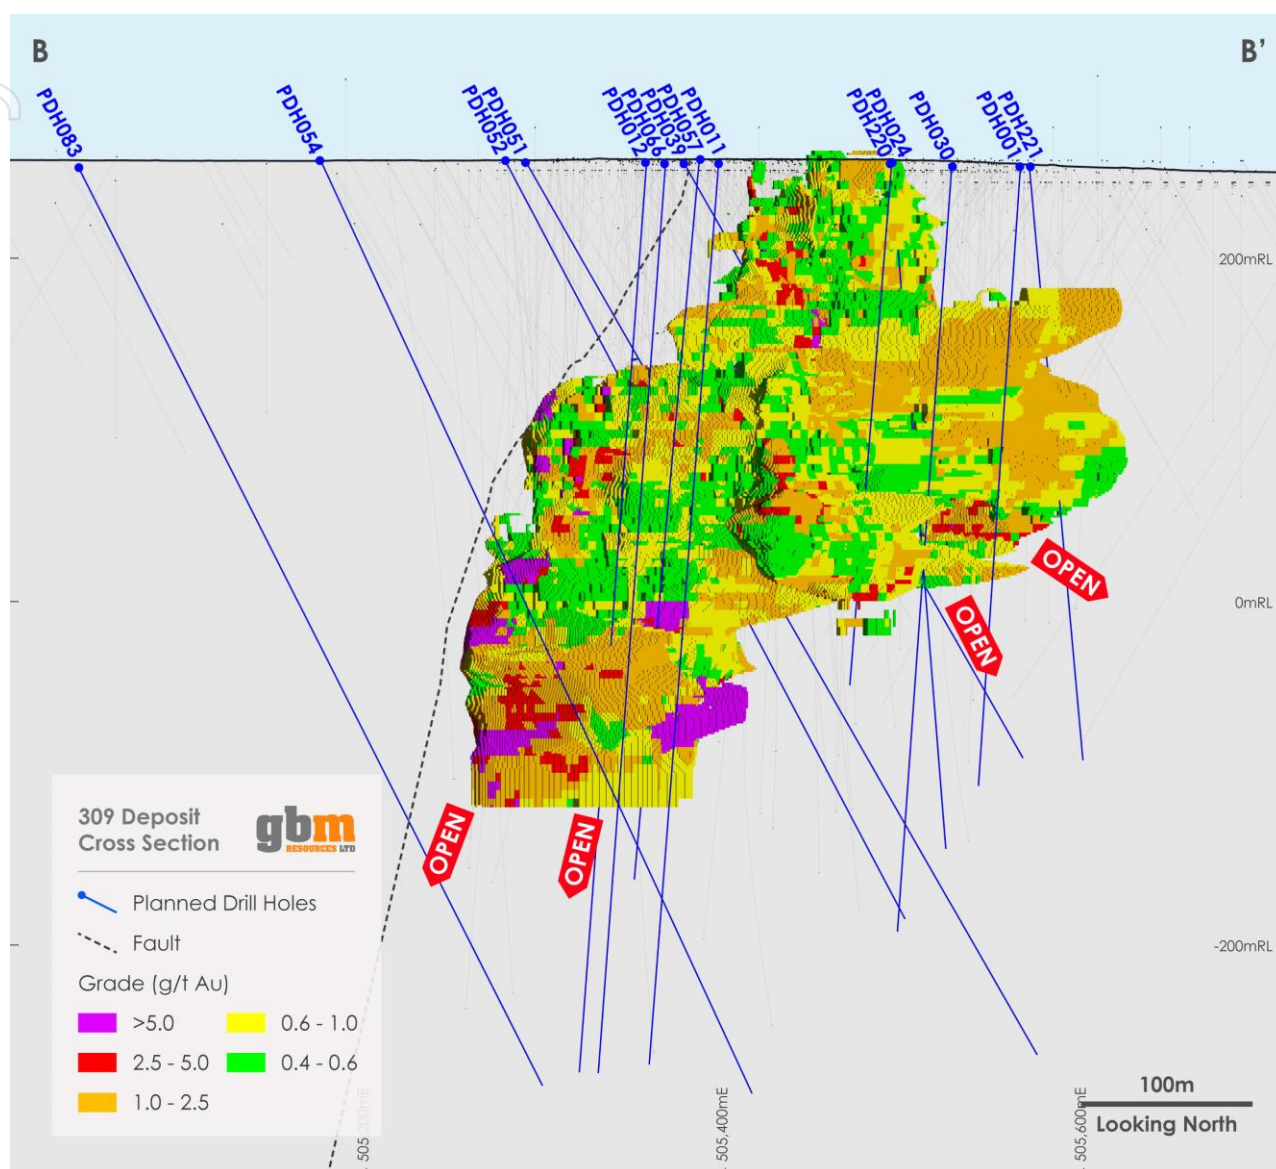


Figure 4 – Cross section view of planned holes (blue) at the 309 deposit.

Wilburs

Stage 1 drilling at Wilburs (new target testing) has also been completed with 720m drilled over three predominantly RC drill holes. Zones of breccias with only minor silica alteration were intersected with minor quartz carbonate veining. Assays are pending.

About GBM Resources

GBM Resources Limited (ASX: GBZ) is a Queensland based mineral exploration and development company focused on the discovery of world-class gold deposits in Queensland, Australia. The Company has a high calibre project portfolio, hosting district scale mineral systems located within the Drummond Basin (QLD). GBM's flagship projects in the Drummond Basin (QLD) holds ~1.84 Moz of gold in JORC resources (Twin Hills, Yandan and Mt Coolon).

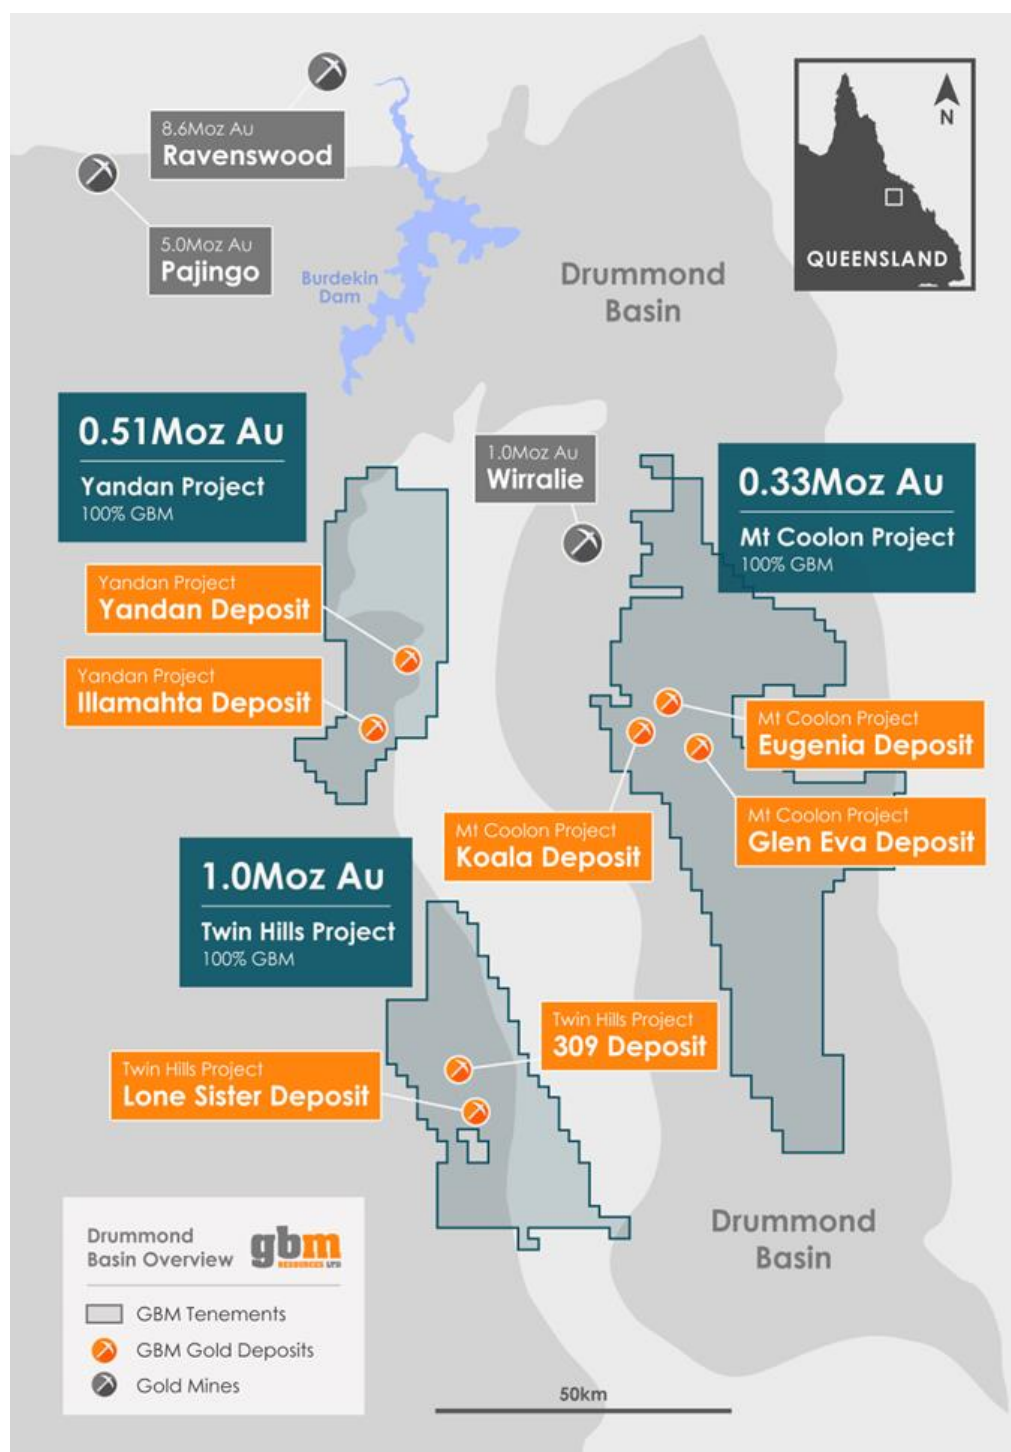


Figure 5 – Drummond Basin Portfolio.

Competent Person's Statement

The information in this report that relates to Exploration Results is based on information compiled by Mr Edward Jelichich-Kane, who is a Member of the Australian Institute of Geoscientists (MAIG) and a Member of the Society of Economic Geologists (MSEG). Mr Edward Jelichich-Kane is a consultant of the company and a holder of shares, incentive options and performance rights in the Company. Mr Edward Jelichich-Kane has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Edward Jelichich-Kane consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this announcement that relates to Exploration Results is extracted from announcements dated 5 December 2022, 2 February 2022 and 18 January 2019, respectively, which are available to view on the Company's website and are based on, and fairly represent information compiled by the relevant Competent Person. The Company confirms that: (a) it is not aware of any new information or data that materially affects the information included in the original announcements; (b) all material assumptions included in the original announcements continue to apply and have not materially changed; and (c) the form and context in which the relevant Competent Persons' findings are presented in this announcement have not been materially changed from the original announcements.

The information in this announcement that relates to the Company's Mineral Resources is extracted from announcements named and dated in Appendix 1 of this announcement, is based on, and fairly represents information compiled by the relevant Competent Persons and can be viewed on the Company's website. The Company confirms that: (a) it is not aware of any new information or data that materially affects the information included in the original announcements; (b) all material assumptions included in the original announcements continue to apply and have not materially changed; and (c) the form and context in which the relevant Competent Persons' findings are presented in this announcement have not been materially changed from the original announcements.

Forward Looking Statements

Certain information in this document refers to the intentions of GBM Resources Limited (ASX: GBZ), however these are not intended to be forecasts, forward looking statements or statements about the future matters for the purposes of the Corporations Act or any other applicable law. Statements regarding plans with respect to GBM's projects are forward looking statements and can generally be identified by the use of such words as 'project', 'foresee', 'plan', 'planned', 'expect', 'aim', 'intend', 'anticipate', 'believe', 'estimate', 'may', 'should', 'will', or similar expressions. There can be no assurance that GBM's plans for its projects will proceed as expected and there can be no assurance of future events which are subject to risk, uncertainties and other actions that may cause GBM's actual results, performance or achievements to differ from those referred to in this announcement. While the information in this announcement has been prepared in good faith, there can be given no assurance or guarantee that the occurrence of these events referred to in this announcement will occur as contemplated. Accordingly, to the maximum extent permitted by law, GBM and any of its affiliates and their directors, officers, employees, agents and advisors disclaim any liability whether direct or indirect, express or limited, contractual, tortious, statutory or otherwise, in respect of the accuracy, reliability or completeness of the information in this announcement, or likelihood of fulfilment of any forward-looking statement; and do not make any representation of warranty, express or implied, as to the accuracy, reliability or completeness of the information in this announcement, or likelihood of fulfilment of any forward-looking statement or any event or results expressed or implied in any forward-looking statement; and disclaim all responsibility and liability for these forward-looking statements (including, without limitation, liability for negligence).

This ASX Announcement has been authorised for release by the Company's Chief Executive Officer, Mr Daniel Hastings.

Appendix 1 - GBM Mineral Resource Estimate for the Drummond Basin Projects (Twin Hills, Yandan and Mt Coolon) along with other company interests

Deposit	Resource Category									Total			Cut-off
	Measured			Indicated			Inferred						
	000' t	Au g/t	Au oz	000' t	Au g/t	Au oz	000' t	Au g/t	Au oz	000' t	Au g/t	Au oz	
Koala - ML													
Open Pit				670	2.6	55,100	440	1.9	26,700	1,120	2.3	81,800	0.4
UG Extension				50	3.2	5,300	260	4	34,400	320	3.9	39,700	2.0
Tailings	114	1.7	6,200	9	1.6	400				124	1.6	6,600	1.0
Sub Total	114	1.7	6,200	729	2.6	60,800	700	2.7	61,100	1,563	2.5	128,100	
Eugenia													
Oxide - Open Pit				885	1.1	32,400	597	1.0	19,300	1,482	1.1	51,700	0.4
Sulphide - Open Pit				905	1.2	33,500	1,042	1.2	38,900	1,947	1.2	72,400	0.4
Sub Total				1,790	1.1	65,900	1,639	1.1	58,200	3,430	1.1	124,100	
Glen Eva - ML													
Sub Total - Open Pit				1,070	1.6	55,200	580	1.2	23,100	1,660	1.5	78,300	0.4
Yandan - ML													
East Hill - Open Pit				4,860	1.5	240,000	7,900	0.8	203,000	12,800	1.1	443,000	0.4
Yandan South - Open Pit							900	0.6	16,000	900	0.6	16,000	0.3
Sub Total				4,860	1.5	240,000	8,800	0.8	219,000	13,700	1.0	459,000	
Illamahta													
Oxide - Open Pit							1,147	0.7	26,900	1,147	0.7	26,900	0.4
Sulphide - Open Pit							1,045	0.9	28,600	1,045	0.9	28,600	0.4
Sub Total							2,192	0.8	55,500	2,192	0.8	55,500	
Twin Hills - ML													
309 - Open Pit	830	2.8	73,900	5,480	1.3	235,200	3,650	1.1	129,800	9,960	1.4	438,900	0.4
309 - UG				190	4.0	24,500	480	3.9	59,900	670	3.9	84,400	2.0
Lone Sister - Open Pit				5,250	1.3	227,300	6,550	0.9	188,500	11,800	1.1	415,800	0.4
Lone Sister - UG				370	2.9	34,300	310	2.6	25,800	680	2.7	60,100	2.0
Sub Total	830	2.8	73,900	11,290	1.4	521,300	10,990	1.1	404,000	23,110	1.3	999,200	
Drummond Basin Total	944	0.0		19,739	1.5	943,200	24,901	1.0	820,900	45,655	1.26	1,844,200	
White Dam - ML													
Hannaford - Open Pit				700	0.7	16,400	1,000	0.8	26,900	1,700	0.8	43,300	0.2
Vertigo - Open Pit				300	1.0	9,400	1,400	0.6	29,000	1,700	0.7	38,400	0.2
White Dam North - Open Pit				200	0.5	2,800	1,000	0.6	17,600	1,200	0.5	20,400	0.2
Sub Total				1,200	0.7	28,600	3,400	0.7	73,500	4,600	0.7	101,900	
cut-off grade is 0.20 g/t Au for all, Vertigo is restricted to above 150RL (~70 m below surface)													
GBM Total	1,946,100												

The announcements containing the Table 1 Checklists of Assessment and Reporting Criteria relating to the 2012 JORC compliant Resources are:

- Koala/Glen Eva and Eugenia – GBM ASX Announcement, 4 December 2017, Mt Coolon Gold Project Scoping Study.
- Yandan – GBM ASX Announcement, 23 December 2020, Mt Coolon and Yandan Combined Resources Total 852,000 oz, following completion of Yandan acquisition, GBM ASX Announcement, 14 March 2023, Results of Yandan Mineral Resource Update
- Twin Hills – GBM ASX Announcements, 18 January 2019, Mt Coolon and Twin Hills Combined Resource Base Approaches 1 Million Ounces, 2 February 2022, Significant Resource Upgrade at Twin Hills Project and 5 December 2022, Twin Hills Gold Project Upgrades to ~1 Moz Mineral Resource
- White Dam – GBM ASX Announcement, 18 August 2020, White Dam Maiden JORC 2012 Resource of 102 koz
 - a) The preceding statements of Mineral Resources conforms to the "Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves (JORC Code) 2012 Edition"
 - b) All tonnages are dry metric tonnes
 - c) Data is rounded to ('000 tonnes, 0.0 g/t and '000 ounces). Discrepancies in totals may occur due to rounding
 - d) Resources have been reported as both open pit and underground with varying cut-off based off several factors as discussed in the corresponding Table 1 which can be found with the original ASX announcement for each Resource

Appendix 2 – Drill Hole Collar and Significant Assay Results Data

Prospect	Hole ID	East	North	RL	Dip	Azimuth	EOH Depth	Status
Lone Sister	LSDH001A	508,347	7,568,588	238	-58	178	651.4	Completed
Lone Sister	LSDH002	508,438	7,568,188	247	-58	344	591.4	Completed
Lone Sister	LSDH003	508,476	7,568,417	251	-54	270	402.6	Completed
Wilburs	THDH001	504,885	7,576,584	244	-68	45	329.4	Completed
Wilburs	THDH002	504,962	7,576,330	247	-60	180	236.8	Completed
Wilburs	THDH003	505,066	7,576,771	246	-60	227	154.0	Completed
309	TNDH001	505,522	7,575,405	252	-64	11	360.7	Completed
309	TNDH002	505,285	7,575,340	255	-62	9		Active
309	TNDH003	505,295	7,575,410	255	-62	9	504.8	Completed

Hole ID	From	To	Interval	Grade	gram*metres	Intercept
LSDH001A	138.0	144.0	6.0	0.56	3	6m @ 0.56g/t Au from 138m
LSDH001A	386.0	394.0	8.0	0.52	4	8m @ 0.52g/t Au from 386m
LSDH001A	406.0	409.0	3.0	0.47	1	3m @ 0.47g/t Au from 406m
LSDH001A	442.0	452.0	10.0	4.33	43	10m @ 4.33g/t Au from 442m
LSDH001A	442.0	444.0	2.0	5.05	10	2m @ 5.05g/t Au from 442m
LSDH001A	451.0	456.0	5.0	8.36	42	5m @ 8.36g/t Au from 451m
LSDH001A	459.0	464.0	5.0	1.09	5	5m @ 1.09g/t Au from 459m
LSDH001A	459.0	460.0	1.0	2.97	3	1m @ 2.97g/t Au from 459m
LSDH001A	473.0	474.0	1.0	0.85	1	1m @ 0.85g/t Au from 473m
LSDH002	5.0	6.0	1.0	1.82	2	1m @ 1.82g/t Au from 5m
LSDH002	13.0	17.0	4.0	0.38	2	4m @ 0.38g/t Au from 13m
LSDH002	23.0	24.0	1.0	0.53	1	1m @ 0.53g/t Au from 23m
LSDH002	29.0	35.0	6.0	0.36	2	6m @ 0.36g/t Au from 29m
LSDH002	40.0	41.0	1.0	0.41	0	1m @ 0.41g/t Au from 40m
LSDH002	47.0	52.0	5.0	0.63	3	5m @ 0.63g/t Au from 47m
LSDH002	60.0	74.0	14.0	1.19	17	14m @ 1.19g/t Au from 60m
LSDH002	67.0	69.0	2.0	4.71	9	2m @ 4.71g/t Au from 67m
LSDH002	80.0	90.0	10.0	0.83	8	10m @ 0.83g/t Au from 80m
LSDH002	83.0	84.0	1.0	2.78	3	1m @ 2.78g/t Au from 83m
LSDH002	100.0	103.0	3.0	0.84	3	3m @ 0.84g/t Au from 100m
LSDH002	128.0	142.0	14.0	0.42	6	14m @ 0.42g/t Au from 128m
LSDH002	149.0	154.0	5.0	0.91	5	5m @ 0.91g/t Au from 149m
LSDH002	189.0	278.0	89.0	1.28	114	89m @ 1.28g/t Au from 189m
LSDH002	194.0	195.0	1.0	2.01	2	1m @ 2.01g/t Au from 194m
LSDH002	201.0	202.0	1.0	2.59	3	1m @ 2.59g/t Au from 201m
LSDH002	211.0	214.0	3.0	1.83	5	3m @ 1.83g/t Au from 211m
LSDH002	219.0	220.0	1.0	4.74	5	1m @ 4.74g/t Au from 219m
LSDH002	227.0	228.0	1.0	3.83	4	1m @ 3.83g/t Au from 227m
LSDH002	240.0	241.0	1.0	3.68	4	1m @ 3.68g/t Au from 240m
LSDH002	249.0	250.0	1.0	31.67	32	1m @ 31.67g/t Au from 249m
LSDH002	257.0	258.0	1.0	5.50	6	1m @ 5.5g/t Au from 257m
LSDH002	262.0	264.0	2.0	3.86	8	2m @ 3.86g/t Au from 262m
LSDH002	277.0	278.0	1.0	2.26	2	1m @ 2.26g/t Au from 277m
LSDH002	283.0	294.0	11.0	1.11	12	11m @ 1.11g/t Au from 283m
LSDH002	288.0	289.0	1.0	2.20	2	1m @ 2.2g/t Au from 288m
LSDH002	293.0	294.0	1.0	2.26	2	1m @ 2.26g/t Au from 293m
LSDH002	299.0	351.0	52.0	2.77	144	52m @ 2.77g/t Au from 299m
LSDH002	300.0	303.2	3.2	15.36	49	3.2m @ 15.36g/t Au from 300m
LSDH002	305.0	306.0	1.0	4.19	4	1m @ 4.19g/t Au from 305m
LSDH002	310.0	311.0	1.0	2.92	3	1m @ 2.92g/t Au from 310m
LSDH002	329.0	331.0	2.0	11.21	22	2m @ 11.21g/t Au from 329m
LSDH002	338.0	342.0	4.0	9.23	37	4m @ 9.23g/t Au from 338m
LSDH002	356.0	370.7	14.7	0.66	10	14.7m @ 0.66g/t Au from 356m
LSDH002	366.0	367.0	1.0	2.09	2	1m @ 2.09g/t Au from 366m

Appendix 3: JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	Nature and quality of sampling (i.e. Cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- All Reverse Circulation (RC) pre-collars were sampled on 2m intervals where no indication of possible mineralisation. Where indications of mineralisation exist (e.g. quartz in chips) sampling was done on 1m intervals. - All RC samples were split using an industry standard riffle splitter. - All sampling was on half cut diamond core, mainly HQ3 with lesser NQ3 core samples. - After logging and photographing, all core was cut at nominal 1m interval lengths. Where appropriate a minor number of sample intervals ranging from 0.4m to 1.4m were done due to geological or other appropriate contacts. - Samples were half cut lengthways using a Corewise automatic core saw. Half-core interval length samples were then packed in labelled calico bags for laboratory shipment. - Laboratory analysis is undertaken at Intertek Townsville and include pulverising up to 3kg to produce a 50g charge for gold fire assay. - Multi-element analysis was carried out using four acid digest with a 0.25g charge. - Samples greater than 3kg were crushed, split via a rotary splitter and 3kg pulverised.
Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	- Drilling was undertaken by DDH1 with a Sandvik DE840 8x8 truck mounted multipurpose Drill Rig. - Diamond drilling from surface was used for near surface targets. Where appropriate Diamond collars are drilled with PQ3. - Where mineralisation targets are at depth, drillholes may be pre-collared by RC drilling techniques using a 6-inch percussion hammer. - Where RC pre-collars are used, when pre-collars do not achieve target depth, or significant water is intersected resulting in wet samples, or where there are strong indications of mineralisation, holes were then drilled by HQ3 and NQ3 core to end of hole. - Diamond core was recovered in a standard wireline 3m core barrel using standard HQ3 and NQ3 size equipment and a standard core barrel. - Samples were emptied into core trays by gravity or pushed out from the core barrel using water injected under pressure.

Criteria	JORC Code explanation	Commentary
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	- Core was oriented using a Reflex ACT MK III down hole orientation tool. - All RC sample bags are weighed and recorded for each metre sample. - Diamond drill recovery was recorded run by run reconciling against driller's depth blocks noting depth, core drilled, and core recovered. - To date, recoveries for diamond core have averaged > 99% per hole. Recoveries are generally close to 100% in fresh host rock below the base of oxidation. They are intermittently poorer in fractured, and clay weathered or altered units above this surface. - Drilling recovery is good and there no evidence for sample bias.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged.	- All diamond core is logged in detail for lithology, weathering, mineralisation style, alteration, structure, and basic geotechnical parameters (RQD). - Magnetic susceptibility is also recorded and bulk density measurements made at least once per core tray. - The logging has been carried out to an appropriate level of detail for resource estimation. - Core is jigged, orientated, and metre marked prior to being photographed using a digital camera in a proprietary frame to capture one photo of each core tray. All drill core is photographed.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.	- All RC samples are split dry with an industry standard riffle splitter. Where RC pre-collars intersected significant water whereby the RC samples were wet, the drilling was switched from RC to diamond. - All core samples were half cut lengthways using a Corewise automatic core saw. Samples were around 1m length on average, though locally ranged between 0.4 to 1.4m to represent vein and mineralisation boundaries as selected by the geologist. - Sample preparation was undertaken at Intertek Townsville and comprise drying samples, crushing to <4mm and pulverising 3kg to 85% passing 75 µm. Samples greater than 3kg were crushed, split via a rotary splitter and 3kg pulverised. Lab QAQC will include standards, blanks, pulverised size checks and pulp repeats. - GBM quality control procedures for sampling were implemented systematically; blanks (coarse and pulp), standards (Certified Reference Materials) and field duplicates (quarter core) were inserted; focused in mineralised zones. Standards were selected for a range of grades and reflected

Criteria	JORC Code explanation	Commentary
		oxidation states. Some Lab pulp duplicates will be selected by GBM to be collected after the pulverisation stage. Sample preparation is considered appropriate for the sample types and material sampled.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- Gold assays were undertaken by Intertek Laboratories, Townsville using FA50/OE04: lead collection fire assay with a 50g charge and ICP-OES finish. - Multi-element assays were also undertaken by Intertek Laboratories using 4A/MS48: a 0.2g sample is subjected to near-total digestion by a four-acid mixture and finished by ICP Mass Spectrometry. - Laboratory QAQC will involve the use of internal lab standards using certified reference material, blanks, pulp repeats as part of the inhouse Intertek procedures (15 standards, 7 duplicates and 8 blanks per 200 samples). - GBM quality control procedures for sampling were implemented systematically; coarse and pulp blanks and certified pulp standards were inserted focused in mineralised zones, and at the start of each hole/dispatch group. - Standards were selected for a range of grades and reflected oxidation states. Where mineralisation is expected, standards are included. - Field duplicates were undertaken at nominal intervals or where mineralisation is expected.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.	- Historic data was verified during the most recent resource estimation (Refer ASX: GBZ release 2 February 2022). - External data verification of the results reported in this release is not required at this time. - No verification samples (including twinned holes) have been taken. - All data, data entry procedures, data verification and data storage has been carried out by GBM staff in accordance with GBM Standard Operating Procedures (SOPs). GBM SOP's meet industry best practice standards. - GBM standards, blanks and pulp duplicates, and lab standards, blanks and repeats are reviewed to ensure they fall within acceptable limits. - No adjustments or calibrations were made to any assay data used.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	All collar locations were pegged by GBM personnel using geodetic quality DGPS (Garmin Montana GPS). Final pickup (+/- 1cm) will be done by a qualified surveyor.

Criteria	JORC Code explanation	Commentary
	Specification of the grid system used. Quality and adequacy of topographic control.	- Downhole surveys are continuous using an Axis North Seeking Gyro survey tool. - All work was carried out in the Map Grid of Australia (MGA Zone 55) using the GDA94 datum.
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	- The current drill program aims to confirm historic results, provide an initial test of strike and dip extensions to mineralisation, and infill areas of lower drill density in the resource model - The suitability of spacing and orientation of the sampling for grade and geological continuity has been established by previous drilling programs. Should further infill drilling be required to meet resource requirements, this will be completed in due course. - All historical holes at Lone Sister have been drilled generally east-west. This program includes holes in a north-south and south-north orientation.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	Every effort was made to design drilling at high angles to the mineralisation based on the style and shape of mineralisation defined by previous drilling.
Sample security	The measures taken to ensure sample security.	- All drill core is processed and stored at the 309 drill core facility at Twin Hills by Company personnel. - Prepared samples are then transported to Intertek Laboratories in Townsville by either company personnel or 3rd party freight. - Core, coarse rejects and pulps are stored at the 309 Deposit core facility on site.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- No audits of either the data or the methods used in this drilling program have been undertaken to date. - A site visit has been made by an external resource geologist who will be undertaking resource modelling of the Twin Hills deposits upon completion of the current drilling program.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section).

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title	Twin Hills 309 and Lone Sister deposits are contained within current Mining Licence ML70316, expiry 31/12/2034. The license is owned by GBM

Criteria	JORC Code explanation	Commentary
	interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	Resources Ltd through subsidiary company Mt Coolon Gold Mines Pty Ltd. - Royalties on gold production will be to the Queensland Government (currently 5% on all ML's in the state of QLD) and a 2.5% royalty to Franco – Nevada Australia Pty Ltd on certain tenements. - Environmental Authority EPML00772013 is current, and the Financial Assurance (now ERC) held by the Queensland Department of Environment and Science is currently AUD\$1,705,630.55. - The licence is subject to an ILUA with the Jangaa People. The NW corner of the licence falls within a Strategic Cropping Zone, and the licence is contained within a Forest Management Area. - There are no known impediments to future mining on this Licence.
Exploration done by other parties	<i>Acknowledgment and appraisal of exploration by other parties.</i>	- Exploration has been carried out by several companies over a long period of time at Twin Hills. Gold mineralisation was first recognized at Twin Hills by Metana Minerals NL in 1987. Since that time the project area has been held under either an exploration of mining licence by a variety of companies and joint ventures. - BMA Gold commenced underground mining at 309 in January 2006 and ceased mining in February 2007. - Of the drilling data used to inform the 309 mineral resource estimate Metana drilled 1 DD hole (120 m) and 1 RC hole (89 m) in 1988, Plutonic drilled 31 RCDD holes (8555.41 m) and 53 RC holes (5,197.4 m) from 1994 to 1999 and BMA Gold drilled 15 surface DD holes (2,339.1 m), 80 RCDD holes (2,097.3 m), 52 RC holes (6,065.42 m) and 196 underground DD holes (12,608.3 m) from 2002 until 2007. - At the Lone Sister deposit Metana drilled 1 RCDD hole (435.5 m) and 2 RC holes (200 m) in 1988, Plutonic drilled 15 RCDD holes (5,134.99 m) and 1 RC hole (93 m) from 1988 to 1997 and in 2006, Homestake Gold drilled 4 RCDD holes (1,379.33 m) from 1998-1999) and BMA Gold 22 RCDD holes (6,310.9 m) and 5 RC holes (514 m) from 2004 to 2007. - The Twin Hills project area has also been subject to aerial magnetic and radiometric surveys, soil geochemistry, RAB geochemistry and IP surveys. - These results are from the second drill program that GBM has completed at Twin Hills. The first program was conducted in 2022 (Refer ASX: GBZ release 1 September 2022).

Criteria	JORC Code explanation	Commentary
Geology	Deposit type, geological setting and style of mineralisation.	- The Twin Hills deposits are situated within the western domain of the Upper Devonian to Lower Carboniferous Drummond Basin, host to several epithermal gold deposits including the Pajingo, Wirralie, and Yandan. - The 309 Deposit comprises a stockwork of very high grade, generally narrow (< 0.2 m) low sulphidation epithermal quartz-sulphide veins and breccia fill hosted in heavily silicified milled matrix volcanic breccia and the adjacent interbedded siltstone and shale. The host breccias are polymictic with a mix of siltstone / shale and volcanic clasts. The overall geometry of gold mineralisation at 309 is a steeply plunging body and is open at depth. The epithermal quartz veins are irregularly distributed as both trough-going veins and breccia fill. Fluorite associated with open space comb quartz is common and regularly overprinted by later silica forming well developed blades and moss textures. - The Lone Sister deposit is hosted in a rhyolite dyke that has intruded into a volcanoclastic sequence. Gold mineralisation is host by low grade quartz veins and very high-grade quartz-sulphide veins. The gold mineralisation occurs in altered rhyolite. The quartz veins strike north south and dip 50° to 80° to the west. - All drilling at Lone Sister was relogged in 2025 and new geological wireframes constructed. The 2025 drilling program confirms geological continuity.
Drill hole Information	A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: - o easting and northing of the drill hole collar - o elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar - o dip and azimuth of the hole. - o down hole length and interception depth - o hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	- Drill hole collar information including dip, azimuth, and depth are presented in Appendix 2. - Historic drill hole information including resource estimate results are presented in ASX: GBZ release 2 February 2022, Significant Resource Upgrade at Twins Hills Project.

Criteria	JORC Code explanation	Commentary
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	- All quoted drill intercepts have been length-weighted where required. - Intercepts were calculated using a 0.4g/t Au cutoff grade and a maximum 4m internal dilution. High-grade included intercepts calculated with 2.0g/t Au cut off and 2m internal dilution. No high-grade cut was applied (top cut). - No metal equivalents are reported.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	- Drilling is generally oriented perpendicular to the strike of the mineralisation at angles varying from acute to perpendicular. However, only downhole intersections have been reported due to the variety of drill orientations and volume of drilling, the mature nature of the deposit with a range of drilling orientations. - All quoted drill intercepts have been length-weighted where required. - Intercepts were calculated using a 0.4g/t Au cutoff grade and a maximum 4m internal dilution. High-grade included intercepts calculated with 2.0g/t Au cut off and 2m internal dilution. - Downhole depths are reported.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Appropriate images are included within the text of the release.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced avoiding misleading reporting of Exploration Results.	- Intercepts were calculated using a 0.4g/t Au cutoff grade and a maximum 4m internal dilution. High-grade included intercepts calculated with 2.0g/t Au cut off and 2m internal dilution. No high-grade cut was applied (top cut). - All intercepts calculated using the criteria above have been included within the text of the release and in Appendix 2. - Refer ASX: GBZ release 18 January 2019 and release 2 February 2022 for tables of historic intercepts and resource estimation results.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk	No other exploration results are reported in this release.

Criteria	JORC Code explanation	Commentary
	density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Diamond drilling continues at Twin Hills and additional results of this program will be reported in due course. - Further work will focus on metallurgical test work to determine possible processing options, step out drilling to extend both the 309 and Lone Sister deposits at depth, and infill drilling at 309 and the Lone Sister deposit to allow higher confidence resource estimation.