

<u>Mulwarrie Gold Project, WA – Development and Exploration Update</u>

Excellent gold recoveries achieved at Mulwarrie as next phase of resource growth drilling commences

- Positive results received from metallurgical testwork undertaken on samples from recent drilling at the Mulwarrie Project in WA:
 - Average gold recovery of 93% achieved across all samples utilising a 106 micron grind, gravity recovery and 48hr leach kinetics, at an average sample grade of 3.6g/t Au, including:
 - Maximum recovery of 98.5%
 - Average gravity recovery of 44.5%
- Further metallurgical testwork is being designed for Mulwarrie to be included in upcoming study work on the current Mineral Resource Estimate ('MRE') of 350koz @ 3.6g/t Au.
- 1 RC rig and 1 DD rig have re-commenced the next phase of resource growth drilling at Mulwarrie, initially targeting along strike to the south and at depth from previous intercepts including:
 - 4.0m @ 4.5g/t Au from 92m in MWEX067
 - 5.0m @ 13.4g/t Au from 210m in MWEX080
 - 5.0m @ 16.1g/t Au from 248m in MWEX016
 - **4.2m @ 54.0g/t Au** from 334.3m in MWEX046
 - 13.2m @ 8.5g/t Au from 359m in MWEX041
 - **7.8m @ 5.0g/t Au** from 490.8m in MWEX081
- Three rigs are operating at Comet Vale undertaking growth and exploration drilling that will underpin the next MRE update after the one scheduled for December 2025.

Gorilla Gold Mines Ltd (ASX: GG8) ('Gorilla' or 'the Company'), is pleased to advise that it has received highly encouraging results from metallurgical testwork at the Mulwarrie Project, located 60km from its Comet Vale Project and close to multiple operating gold processing facilities just north of Kalgoorlie in Western Australia's Goldfields.



PO Box: PO Box 1473, Subiaco WA 6904



Gorilla Chief Executive Officer, Charles Hughes, commented:

"We are delighted with these initial metallurgical testwork results, which confirm the ability to achieve exceptional gold recoveries on mineralised samples from Mulwarrie using industry-standard gold milling processes.

"Achieving an average gold recovery of 93% across all samples using gravity extraction and cyanide leach is a fantastic result, with maximum recoveries of up to 98%.

"This is an important de-risking step for the Mulwarrie Project as we begin detailed study work to evaluate development options on the current Mineral Resource of 350,000oz at 3.6g/t Au. Further detailed metallurgical work is currently being planned and will be undertaken as part of the next stage of study work.

"We are also pleased to have two drill rigs back at Mulwarrie to start the next phase of resource growth drilling. The diamond and RC rig will target clear step-out targets along strike and at depth, down-plunge from previous high-grade intercepts whilst also undertaking infill drilling to convert high grade inferred resources into the indicated category.

"We see clear potential substantially expand the overall Mulwarrie MRE by the time of the next resource update next year whilst also significantly increasing the indicated component of the resource.

"In the meantime, drilling is continuing with three rigs operating at Comet Vale. While work is currently underway on the updated Mineral Resource for Comet Vale, due next month, we are already focusing on delivering the next leg of growth at this exciting project – which offers so many avenues for resource growth, discovery and development."



Figure 1. RC rig in action at Mulwarrie, Nov 2025





Figure 2. Location of the Mulwarrie Gold Project.

Growth and Exploration activities at Mulwarrie

The main mineralisation at Mulwarrie was discovered in 2017, with modest open pit production occurring. Prior to this, the project had fractured ownership and was tenure-constrained and caught up in corporate activity.

When Gorilla acquired the Mulwarrie Project in November 2024, it further consolidated tenure in the area to unlock growth opportunities for the project. An updated MRE of 350koz @ 3.6g/t Au was announced for Mulwarrie in August 2025 which Gorilla is aiming to increase in both tonnes and grade.

Mulwarrie lies within granted Mining Leases adjacent to the Riverina-Davyhurst haul road, in a region with multiple operational gold mills within a 100km radius of the Project area.



At Mulwarrie, a major north-west trending, steeply dipping fault system is developed in mafic and intermediate lithologies with mineralisation associated with this structural system and the development of quartz veining, pyrrhotite and pyrite sulphides and biotite alteration, often at the margins of intermediate porphyries.



Figure 3. Example of gold lode at Mulwarrie in drill core, from MWEX046 334.3m to 338.5m; 4.2m @ 54.3 g/t Au

Metallurgical results reported in this release have demonstrated that gold mineralisation at the Mulwarrie Project is suitable to be treated by a standard crushing-grinding-gravity separation and cyanidation process employed by most gold processing facilities in WA.

A total of nine variability test work samples from Mulwarrie were composited from drilling samples stored in photon assay jars to an individual weight of 3-5kg. These variability samples were selected to represent mineralisation from a range of different gold lodes at Mulwarrie, a range of different depths, a range of different oxidation levels and a variety of gold grades and host lithologies (Figure 4, Table 1).



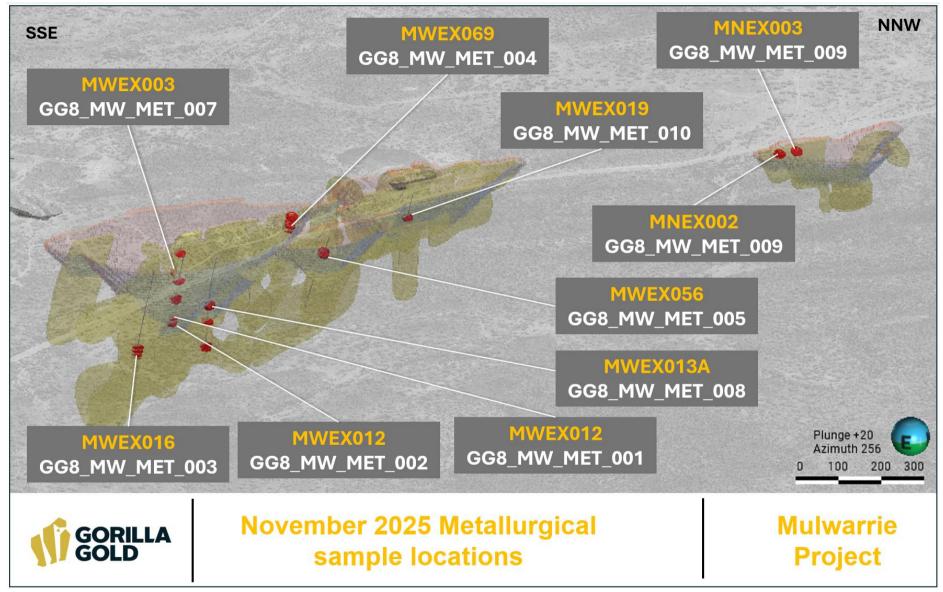


Figure 4. Location of Metallurgical samples



	Sample deta	nils		Variety	of mate	rials			Variety	of grade	s							Var	iety of l	odes				Variety	of depths	
																					Domain N1				Depth 100- 200	Depth>200
GG8_MW_MET_001	MWEX012	3.8	3.5			V	~				~					~									V	
GG8_MW_MET_002	MWEX012	25.8	2			¥	V								~	V									~	
GG8_MW_MET_007	MWEX003	0.86	3.5			V	~								•	~									~	
GG8_MM_MET_008	MWEX013a	9	5			V	~						~									~			~	
GG8_MW_MET_010	MWEX019	1.4	3			~	~			~									~					~		
GG8_MW_MET_003	MWEX016	13.4	3			V	~							~			~									~
GG8_MW_MET_009	MNEX003& MNEX002	4.4	2		•		~				~										~		•			
GG8_MW_MET_004	MWEX069	4.7	4			V	~				•						~						~			
GG8_MW_MET_005	MWEX056	5.8	4.5			~		V				V								₩				V		

Table 1. Mulwarrie variability metallurgical samples

A 500g sub sample was taken from each variability sample and analysed for multi-elements via ICP-MS and Au via Fire assay. Arsenic levels were very low (<10ppm to 20ppm), across all samples analysed and no other deleterious elements were detected during this analysis.

A 5kg master composite sample with a head grade of 3.4 g/t Au was created by combining a portion of the crushed variability samples. Variability samples were crushed to p80 3.35mm and then selected samples for the master composite were combined and homogenised in a rotary sample splitter. Grind size establishment testwork was undertaken on this master composite sample, which was split into 4 sub samples and then respectively ground to 75 micron, 106 micron, 125 micron and 150 micron, with gravity and column leach testwork undertaken on each sample. Gold recovery on Mulwarrie ores is grind size dependent, as most deposits are, and 106 micron represented a reasonable middle ground that has a standard grind size and also a good recovery (Table 2 below). This grind size was selected for subsequent variability test work samples.

	Composite ID	Grind Test ID Size		%	lead Au Grade (g/t		Au Extraction (%)					Tail Au Grade	Reagents (kg/t)		
		Test ID	P80	Solids	Assay	Calc.	Grav	2-hr	4-hr	8-hr	24-hr	48-hr	(g/t)	NaCN	Lime
		IM3202	150		4.12 / 2.8 <i>6</i>	3.30	43.38	74.36	80.05	85.63	89.28	91.06	0.30	0.64	12.07
	GG8 MASTER	IM3203	125	40		3.26	43.95	75.33	79.18	84.83	88.52	90.33	0.32	0.64	11.99
	COMPOSITE #1	IM3204	106			3.32	43.13	75.86	81.52	87.07	90.70	92.47	0.25	0.70	12.08
		IM3205	75			3.26	43.89	79.16	84.92	92.45	96.14	94.33	0.19	0.70	12.13

Table 2. Mulwarrie Composite grind size testwork table

Each variability sample was crushed to p80 3.35mm and ground to 106 micron, subject to a gravity concentration by a benchtop Knelson Concentrator and a direct cyanide leach was undertaken on the gravity tail. This work was undertaken by ALS Perth. All testwork was conducted using (Comet Vale) site water, which is hypersaline. Hypersaline groundwater requires the addition of lime to buffer gold solution pH during the process.

Results for the variability test work demonstrates commercial recoveries across the entirety of the Mulwarrie deposit (Table 3 below), with an average total recovery of 93%, with average gravity recoverable gold 44.5% and the remainder recovered utilising a direct leach running for 48 hours.



			Grind	%	Head Au Gra	ade (g/t)			Au Extra	ction (%)			Tail Au	Reagen	ts (kg/t)
	Composite ID	Test ID	Size P80	Solids	Assay	Calc.	Grav	2-hr	4-hr	8-hr	24-hr	48-hr	Grade (g/t)	NaCN	Lime
	GG8_MW_MET_001	IM3222	106	40	3.11 / 3.65	2.70	51.17	74.87	81.70	88.26	92.44	94.44	0.15	0.80	22.94
	GG8_MW_MET_002	IM3223	106	40	29.9 / 26.0	20.8	48.38	81.00	87.20	92.03	95.28	96.58	0.71	0.65	24.44
	GG8_MW_MET_003	IM3224	106	40	9.89 / 8.65	11.5	32.65	57.62	71.49	85.30	93.13	95.01	0.58	0.75	22.36
l	GG8_MW_MET_004	IM3225	106	40	4.54 / 4.74	4.63	50.59	80.99	86.30	90.12	93.78	96.11	0.18	0.79	24.06
ı	GG8_MW_MET_005	IM3226	106	40	5.68 / 6.18	4.55	54.50	79.78	85.18	87.77	90.25	91.43	0.39	0.79	19.78
ı	GG8_MW_MET_007	IM3227	106	40	1.02 / 0.86	0.98	34.83	74.10	80.39	80.39	86.17	86.17	0.14	0.84	17.80
ı	GG8_MW_MET_008	IM3228	106	40	7.87 / 8.82	7.18	83.06	92.86	94.57	95.39	96.96	98.47	0.11	0.75	17.56
	GG8_MW_MET_009	IM3229	106	40	4.38 / 4.57	4.13	33.39	90.61	92.09	94.95	94.95	96.25	0.16	1.53	17.64
	GG8_MW_MET_010	IM3230	106	40	1.70 / 1.40	1.33	12.02	64.83	69.45	78.30	78.30	82.35	0.24	0.78	19.22

Table 3. Mulwarrie Variability sample met testwork

Next steps at Mulwarrie

A drilling campaign utilising 1 RC rig and 1 DD rig has commenced at the Mulwarrie project with a view to significantly increase the inferred and indicated MRE. This program will target the southern part of the project area first as indicated in Figure 5, with extensional and infill drilling occurring simultaneously.

Infill and extensional soil sampling programs are being undertaken to follow up on key gold anomalies identified in soil sampling results released on 17 October 2025.

Further metallurgical test work is being planned as well as and geotechnical and engineering studies.



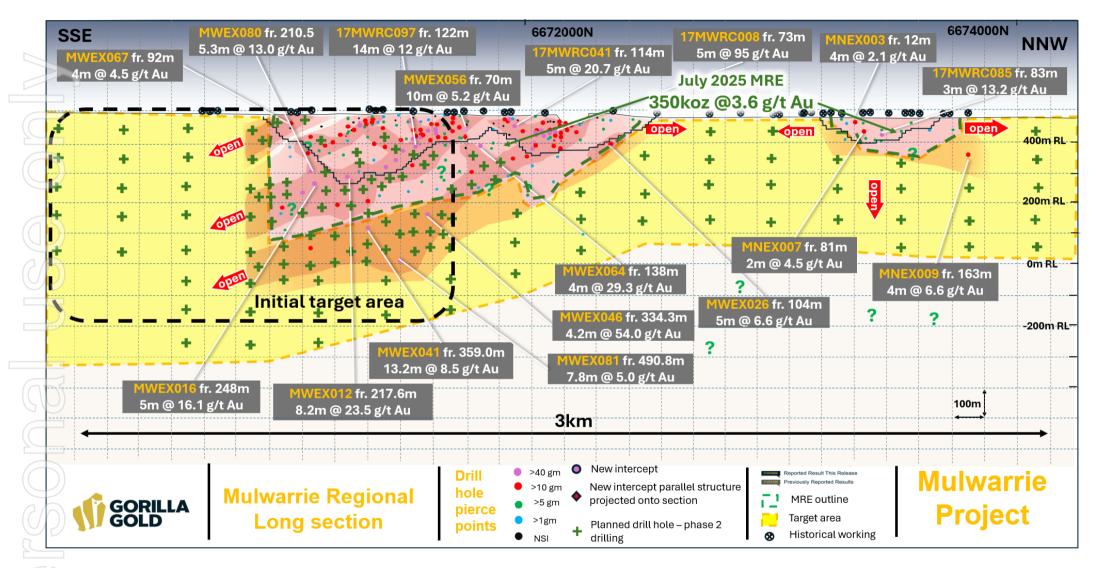


Figure 5. Location of next phase of drilling at Mulwarrie



This announcement has been authorised and approved for release by the Board.

Investor Enquiries

Charles Hughes
Chief Executive Officer

admin@gg8.com.au

Media Inquiries

Read Corporate - Nicholas Read

Mobile: (0419 929 046)

nicholas@readcorporate.com.au

Competent Person's Statement:

The information in this announcement relates to exploration results for the Mulwarrie Project which Mr. Charles Hughes has reviewed and approves. Mr. Hughes, who is an employee of Gorilla Gold Mines Ltd, a professional geoscientist and a Member of the Australian Institute of Geoscientists. Mr. Hughes has sufficient experience relevant to the style of mineralisation and type of deposits under consideration, and to the activities which have been undertaken to qualify as a Competent Person as defined in the 2012 Edition of the Joint Ore Reserves Committee (JORC) Australasian Code for Reporting of Exploration results, Mineral Resources and Ore Reserves. Mr. Hughes consents to the inclusion in this announcement of the matters based on this information in the form and context in which it appears.

Specific exploration results referred to in this announcement were originally reported in the following Company announcements in accordance with ASX Listing Rule 5.7:

	Title	Date
	New priority targets from soil sampling at Comet Vale and Mulwarrie	17 October 2025
)	Mulwarrie High Grade Step Outs	3 October 2025
,	High Grade Step-Out Holes at Mulwarrie	26 August 2025
)	Mulwarrie Resource Update	4 August 2025
	Mulwarrie Drilling Update	28 July 2025
	Mulwarrie Drilling Update	17 July 2025
)	Update For Comet Vale and Mulwarrie	2 July 2025
/	High Grade Diamond Drill results from Mulwarrie	12 June 2025
	Mulwarrie Drilling Update	30 May 2025
	Mulwarrie Update	4 April 2025
	Maiden Drilling Results from Mulwarrie	21 March 2025
	Reporting on Genesis Minerals Mulwarrie Project	18 November 2024
	Acquisition of Mulwarrie Project from Genesis Minerals	18 November 2024



High grade diamond drilling results at Mulwarrie confirm lode structures and pave way for resource upgrade	18 March 2019
--	---------------

The Company confirms that it is not aware of any information or data that materially affects the information included in the said original announcements and the form and context in which the Competent Persons' findings are presented have not materially modified from the original market announcements.

Current Mineral Resource Statement for the Mulwarrie Project:

Mulwarrie Mineral Resource Estimate Summary (0.5g/t cut-off Open pit, 1.1 g/t Underground)

Category	Tonnage (Mt)	Au Grade (g/t)	Au Ounces
Inferred	1.3	2.8	110,000
Indicated	1.8	4.2	240,000
Total	3	3.6	350,000

The Company confirms that it is not aware of any new information or data that materially affects the information as previously released on 4 August 2025 and all material assumptions and technical parameters underpinning the estimate continue to apply and have not materially changed.

APPENDIX 3 JORC TABLES

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Comments
Sampling techniques	 Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. 	RC drilling - samples collected as 4m composites and in areas where interesting lithology, alteration, mineralisation or veining was encountered, 1m splits were taken. Composite samples are collected from samples piles, 1m splits are taken for every metre from the cyclone with duplicate samples taken at the instruction of the field geologist from the second chut on the cone. DD drilling has samples collected as half core in intervals between 0.3-1m based on lithology.
	 Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. 	 Samples collected by GG8 field crew and submitted to ALS Laboratory in Kalgoorlie, WA. All samples are considered to be representative for the manner in which they are used.



	 Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be 	The samples were analysed using the photon assay method which uses a 0.5kg sample and requires minimal handling. The samples are riffle split at the lab and crushed to 80% passing 2mm to ensure homogeneity as uniform sample distribution is important to a quality analysis.
	required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.	
Drilling techniques	 Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face- sampling bit or other type, whether core is oriented and if so, by what method, etc). 	 RC drilling was completed by several contractors using multiple modern RC rigs capable of significant drill depths. RC drilling uses a standard 5.5in bit and an auxiliary booster capable of 900psi, sufficient to keep sample dry at most depths. DD drilling was completed by contractors using multiple modern DD rigs. All drill rigs utilised by GG8 are industry best standard.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. 	 RC sample recovery was qualitatively assessed by the field geologists. Good recoveries were had. DD recovery measured actual core length between drillers blocks to the nearest cm. Sample weights are recorded by the laboratory and average 3kg.
	 Measures taken to maximise sample recovery and ensure representative nature of the samples 	Sample depths were cross-checked regularly. The cyclone was regularly cleaned to ensure no material build up and sample material was checked for any potential downhole contamination. The drilling sample recoveries/quality are acceptable and are appropriately representative for the style of mineralisation.
	 Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 no obvious sample recovery biases or biases related to loss or gain of fines have been identified.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. 	 Logged for geology on the 1m intervals with chips washed and stored in chip trays by the geologist. Logging was inputted directly into the onsite laptops using suitable Company logging. DD core stored in trays with every metre logged. Logging is of a qualitative nature.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	RC chips and DD were logged for lithology, colour, weathering, texture and minerals present. Structural measurements and geotechnical data were recorded on DD core N/A
Sub-sampling	 The total length and percentage of the relevant intersections logged. If core, whether cut or sawn and whether 	Core is sawn with half cores taken for assay
techniques and sample preparation	 quarter, half or all cores taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. 	RC drilling single 1 metre splits were automatically taken at the time of drilling by a cone splitter attached to the cyclone. 4m composite samples were taken from sample piles. Samples have been dry. Samples are then riffle split at the lab into 0.5kg samples and crushed to 2mm prior to photon assay with a particle size distribution test to ensure 80% passing the 2mm threshold.
	 For all sample types, the nature, quality and appropriateness of the sample preparation technique. 	The technique was appropriate for the work undertaken. During RC logging samples that showed mineralisation, veining or alteration had 1m split samples collected. 1m split samples are later taken from where 4m composites show >0.2g/t gold



\		anomalism. During DD logging any sulphide veining or alteration were sampled.
	 Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. 	QAQC reference samples and duplicates were submitted by GG8. In house standards and blanks were also inserted by ALS.
	 Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. 	1m samples are automatically bagged from the cyclone, field duplicates are taken from a second shute off the splitter. DD duplicates are taken
	 Whether sample sizes are appropriate to the grain size of the material being sampled. 	 All RC samples are collected to approximately 1-5 kg. The sample sizes taken are appropriate relative to the style of mineralisation and analytical methods undertaken. DD sample size is appropriate
Quality of assay data and laboratory tests	 The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. 	All samples were sent to ALS laboratory in Kalgoorlie. Photon Assay method has shown to provide quick turnaround times and high accuracy.
	 For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. 	All analytical results listed are from an accredited laboratory using photon assay method with fire assay as a check method.
	 Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	Certified Reference Materials (CRMs) are included in each batch to ensure the reliability of the assay. These CRMs, such as OREAS254C, OREAS230, and OREAS241, are specifically chosen for photon assay to maintain quality standards and were evaluated against published certificates. The standard deviation was minimal for samples. Selected photon assays ove a range of grades and from different parts of orebodies are umpire checked with Fire Assays and so far shows no material difference in reported grades.
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	External verification has not been carried out, but values were checked against logging and photographs to ensure the intersected Au values are in line with logged alteration, mineralisation or veining. Significant intercepts have been verified by the Exploration Manager, the CEO and Principal consulting geologist.
	The use of twinned holes	No twinned holes at this stage
	 Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. 	 Data was captured directly into specific geological logging software. Assay files have been sent directly from the lab to database manager to avoid operator errors. All physical sampling sheets are filed and scanned electronically and submissions to the lab checked to ensure that no samples are missing or incorrect IDs.
	Discuss any adjustment to assay data.	No adjustments were made to the assay data.
Location of data points	 Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. 	Samples were located using handheld Garmin GPS, the GPS is accurate within 3-5m.
	Specification of the grid system used.	 All collar locations and maps quoted in this Report are using the GDA1994 MGA, Zone 51 coordinate system
	Quality and adequacy of topographic	 Topography based on detailed topographic surveys.



Data spacing and distribution	Data spacing for reporting of Exploration Results.	Data spacing is varied
	Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	■ N/A
	 Whether sample compositing has been applied. 	 Intercepts are aggregated based upon 0.5g/t Au cut off grade and 3m of dilution material.
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	The relationship between the drilling orientation and the orientation of mineralised structures is not considered to have introduced a sampling bias. Most holes have been drilled perpendicular to the main orientation of the interpreted mineralised zone.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	 No drilling orientation related sampling bias has been identified at the Project. Some orientation changes were made to historic holes and the main structure was intersected at the interpreted depth.
Sample security	The measures taken to ensure sample security.	 Samples were transported from the field to the lab by GG8 personnel.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 GG8 undertakes continuous audits and reviews of all its field processes.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

)	Criteria	JORC Code explanation	Commentary
)	Mineral tenement and land tenure status	 Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. 	The Mulwarrie project is in the Davyhurst region of the Eastern Goldfields, Western Australia. M30/119, M30/145, E30/511, E30/512, E30/513, P30/1141, P30/1142 and P30/1143. A 2.5% NSR is payable on the first 50koz of combined gold production from M30/119 and M30/145.
1		 The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	 No known impediments exist with respect to the exploration or development of the tenement.
	Exploration done by other parties	 Acknowledgment and appraisal of exploration by other parties. 	 See previous announcements. Review the Bardoc/Spitfire ASX announcement 19 March 2019, HIGH-GRADE DIAMOND DRILLING RESULTS AT MULWARRIE CONFIRM LODE STRUCTURES AND PAVE WAY FOR RESOURCE UPGRADE A summary of previous exploration at Mulwarrie Gold Project is included below. The Mulwarrie District, including the Mulwarrie Project area has a recorded production of 26,344 ounces of gold from 19,728 tonnes for an average grade of 41.53 g/t Au (1903-1910). 1983 -1988 – Pancontinental Mining Limited completed gridding, geological mapping, aeromagnetic and ground surveys, IP surveys, regional soil sampling, costeaning, RAB and RC drilling.



			Callion, a subsidiary of the German bath Thyssen Schachtbau GMBH (TSG) comining at Mulwarrie Central West in Newith New Holland Mining N.L. (20% interest). A total of 24,344 g/t for 94.5 kg (3,037 ounces) of gold voin 1995 Consolidated Minerals had set tenements and in 1996 completed 34 f (MWRC 601-634) for a total of 2,977 maximum depth of 126 metres. Post 1997 and up to the date that Ethasigned option agreements with Reif and the latter parties conducted their own opporams within the Mulwarrie teneme consisted of RC drilling, reconnaissand and loam sampling. In 1998 Reif and Hoppmann conducted program of 8 drill holes. MWRC 635—which was focused directly south of the between 9590 North and 9620 North. assay results from this program canno available reports. In 2017 Spitfire Minerals conducted driand after Bardoc took ownership condiresource estimation and investigated in	mmenced ovember 1989, erest) and H.F. tonnes @ 3.88 was recovered. cured the RC holes netres and to a an Minerals Ltd d Hoppmann exploration ints. This work be prospecting d an RC drilling MWRC 642 e Central Pit The individual t be located in Illing programs ucted a internally mining
			and economic studies. A pit cutback de created.	
r bersonal	Geology	Deposit type, geological setting and style of mineralisation.	The Mulwarrie Gold Project lies within greenstone belt which forms the north of the Coolgardie Line. The structurally trending Mt. Ida fault lies approximatel the Mulwarrie Mining Centre. Most of t within this greenstone belt are steeply foliated along an NNW/SSE trend. Gold mineralisation has been found in settings at Mulwarrie. Firstly, in narrow with only minor or no quartz veining, w calcsilicate alteration haloes and with occasionally high gold values. The zor mineralisation may be up to 2 metres of generally less than 50 cm. They are content type of gold mineralisation is quite flat dipping often massive quartz strong diopside, biotite, epidote and calleration haloes where gold is also for contributes to the overall wide mineralisation at Mulwarrie is ass to steep dipping quartz reefs with stror biotite, epidote and carbonate alteration Pyrrhotite and pyrite development is all	west extension of dominant north nor
			and adjacent to the quartz reefs. Minor chalcopyrite, galena and sphalerite are associated with gold mineralisation. Gowithin quartz reefs, within biotite selvat quartz veins and in sheared & altered	amounts of also bld is found ges to the
			The main modelled mineralised domai dimension of 1,000m (north-south), rar less than a metre to multiple metres of (east-west) in multiple veins and ranging 300m and 500m RL (AMSL). Benson (1996) interpreted the mineralise being lens shaped pods and as being statements.	nging between er up to 150m ng between sed zones as
			stratigraphically controlled with the zor occurring at felsic/mafic contacts, withi and at metabasalt -metadolerite contact	nes commonly n shear zones



Drill hole Information	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: easting and northing of the drill hole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar dip and azimuth of the hole. down hole length and interception depth hole length. 	Tables reported in the announcement all in MGA GDA 94 zone 51.
	 If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	No information material to the understanding of the exploration results has been excluded.
Data aggregation methods	 In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. 	The mineralized drill intersections will be reported as down hole intervals and were not converted to true widths. True widths may be up to 50% less than drill intersections pending confirmation of lode geometry. Where gold intersections are amalgamated, a weighted average is calculated & repeats were recorded, the average of all the samples was used. Metal equivalent values have not been reported.
	Where aggregate intercepts incorporate short lengths of high- grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.	Weighted average is applied.
	 The assumptions used for any reporting of metal equivalent values should be clearly stated. 	No metal equivalents used.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.	All samples reported are downhole width
	 If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. 	Unknown at this stage, assumed to be roughly orthogonal to drilling
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	All intercepts are downhole intercepts



Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	Appropriate plan and diagrams are included in the body of the text.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Reporting is representative
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	 All other relevant data has been included within this report. Though GG8 acknowledges that often, with time and the announcement of acquisition, further insight and data is obtained from previous geologists/companies that have explored the ground.
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling).	 Further work will be conducted to investigate the extension of mineralisation at depth and along strike. Refer to the body of the text.
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	Diagrams highlight areas of possible extensions