PIVOTAL METALS

Pivotal Metals Limited
ABN: 49 623 130 987

ASX: PVT

Projects
CANADA
- **Horden Lake**
  Ni-Cu-PGM development
- **Belleterre-Angliers**
  Ni-Cu-PGM exploration

Registered Address
Level 8
1 Eagle Street
Brisbane QLD 4000 AUSTRALIA

Postal Address
GPO Box 2517 Perth
WA 6831 AUSTRALIA
P: +61 8 9481 0389
F: +61 8 9463 6103
info@pivotalmetals.com
www.pivotalmetals.com

For further information please contact:
Pivotal Metals
Ivan Fairhall
Managing Director
+61 8 9481 0389
info@pivotalmetals.com

ASX ANNOUNCEMENT

6 August 2024

Geophysics and drilling discovers new mineralised structure west of Horden Lake, further potential along strike.

Pivotal Metals Limited (ASX:PVT) ('Pivotal' or the 'Company') is pleased to provide results from two further drill holes and a new airborne magnetic survey that highlights the regional scale growth potential of its 100% owned Horden Lake Project in Quebec, Canada.

Newly discovered mineralised zone adjacent to Horden Lake

- Airborne survey delineates 1.8km parallel magnetic anomaly, "Horden West", 400m west of the main Horden Lake trend.
- First ever drill hole into Horden West provides strong encouragement for this new zone, highlights of HN-24-113:
  - 2.2m @ 0.77% CuEq from 10.6m
  - 1.1m @ 0.4% CuEq from 45m
  - 1.5m @ 0.84% CuEq from 241m
- Geophysical surveys and follow up drilling are planned to fully investigate the potential of this new discovery.

Additional 600m strike extension potential south of Horden Lake main zone

- 2024 drilling, DHEM and drone magnetics defines up to 600m of potential strike extension to the southwest of Horden Lake.
  - 3.2m @ 1.06% CuEq from 180.7m drilled in HN-24-108, in a low mag anomaly.
  - Off-hole DHEM conductor coincides with strengthening magnetics to the SW.
- Shallow historical drilling results, which lie outside the Horden Lake 2022 resource boundary, highlight the potential of this extension
  - 23.7m @ 1.24% CuEq from 33.4m, incl 7.9m @ 2.16% CuEq in HOR-13-02
  - 54m @ 0.56% CuEq from 59.9m in H26820

Pivotal work program delivering

- Significant growth potential shown through drilling and geophysics completed by Pivotal on the Horden Lake property.
- Assay results from 16 holes from the 2024 drilling results are still pending.
- Metallurgical testwork in progress, with resource update expected in Q4 2024.
- Follow up geophysics to refine regional targets planned for Q4 2024.
- Follow up drilling planned for Jan 2025.

PIVOTAL METALS

Managing Director, Mr Fairhall said:

"The best place to look for a deposit, is next to a deposit. This parallel corridor is a major development in expanding the potential of the project. Previously undrilled, so hitting mineralisation in the first hole is a great first step in developing this into a potentially significant target source of feed to complement the main Horden Lake deposit.

Elsewhere, along strike from Horden Lake, we have further defined a prospective 600m potential strike extension. The new data, combined with exciting intersections in historical drilling, provide clear targets to prioritise as the Company builds its open-pit resources.

Like our successful down-plunge step-out drilling, these are important evidence of the significant potential to enlarge the resource base and bulk-up what is already a sizeable and compelling copper development opportunity.

Overview

Horden Lake is a copper dominant Cu-Ni-Au-PGM-Co Project located 131km north-northwest of Matagami, in Quebec Canada. The Project hosts an indicated and inferred mineral resource estimate of 28mt at 1.5% CuEq, as a result of over 52,464m of drilling previously completed on the property. Pivotal has recently completed a 7,097m / 34 hole diamond drilling campaign of which 3,333m / 16 holes have been reported prior to this announcement.

The main objectives of the drilling program were to infill missing by-product multi-element assay information, target resource expansion potential (which remains open at depth across its full extent) and collect a distribution of metallurgical sample for a complete test work program. Downhole EM surveys have also been completed to dimension future exploration potential targets.

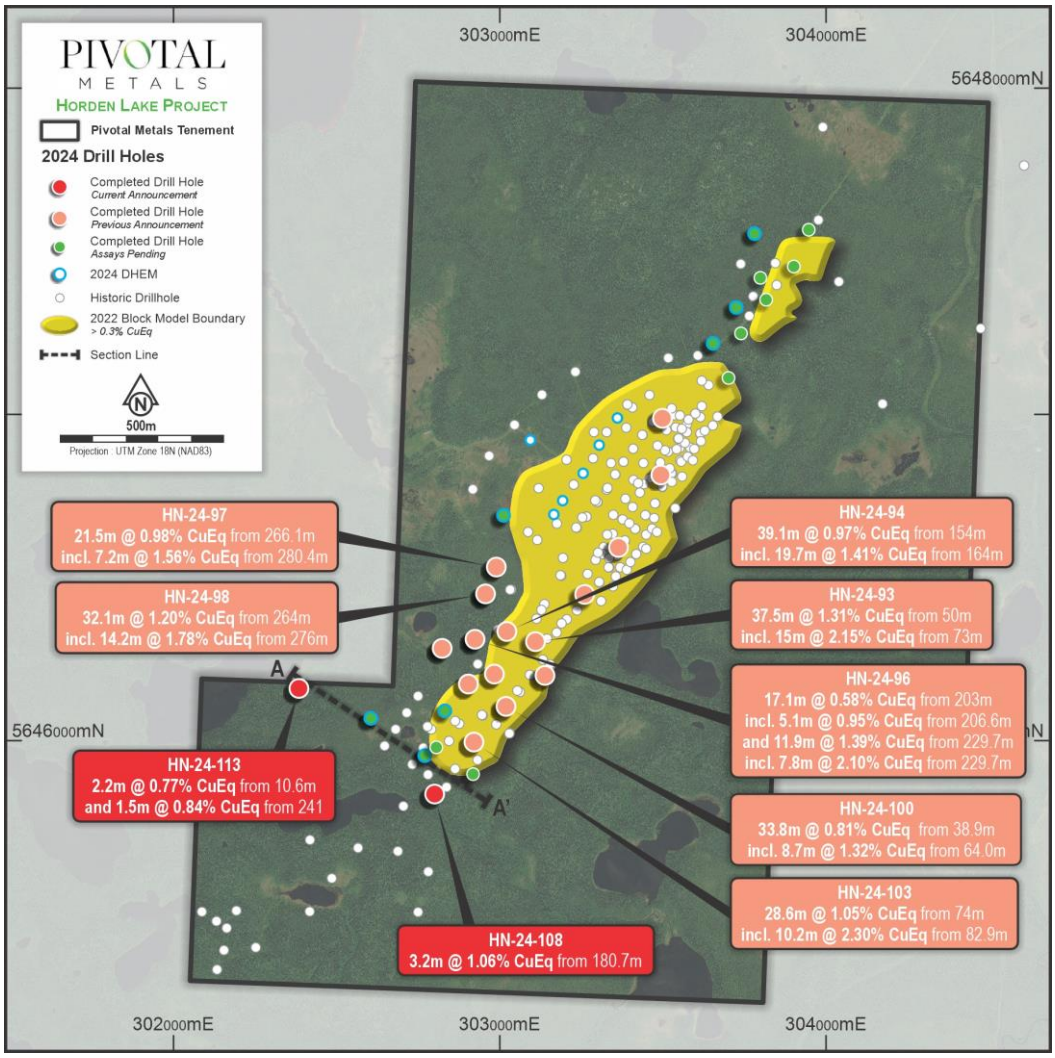

Figure 1: Drill plan map with significant 2024 results, Horden Lake Cu-Ni-Au-PGM Project

2024 Magnetic Survey

Recently completed drone magnetics (Figure 2) has delineated two separate magnetic features on the Horden Lake trend, both with a strong linear NE-SW trend.

The first magnetic feature to the east is over the main mineralised body of Horden Lake. Magnetics shows a clear extension of the Horden Lake trend, to the north and south of the main mineralised zone. This trend extends approximately 800m to the north and 700m to the south beyond the boundary of the 2022 mineral resource estimate.

A second magnetic trend, named "Horden West", has a strike of over 1,850m running parallel to, and is characteristic of, the main Horden Lake trend which hosts the 28mt Indicated and Inferred mineral resource.

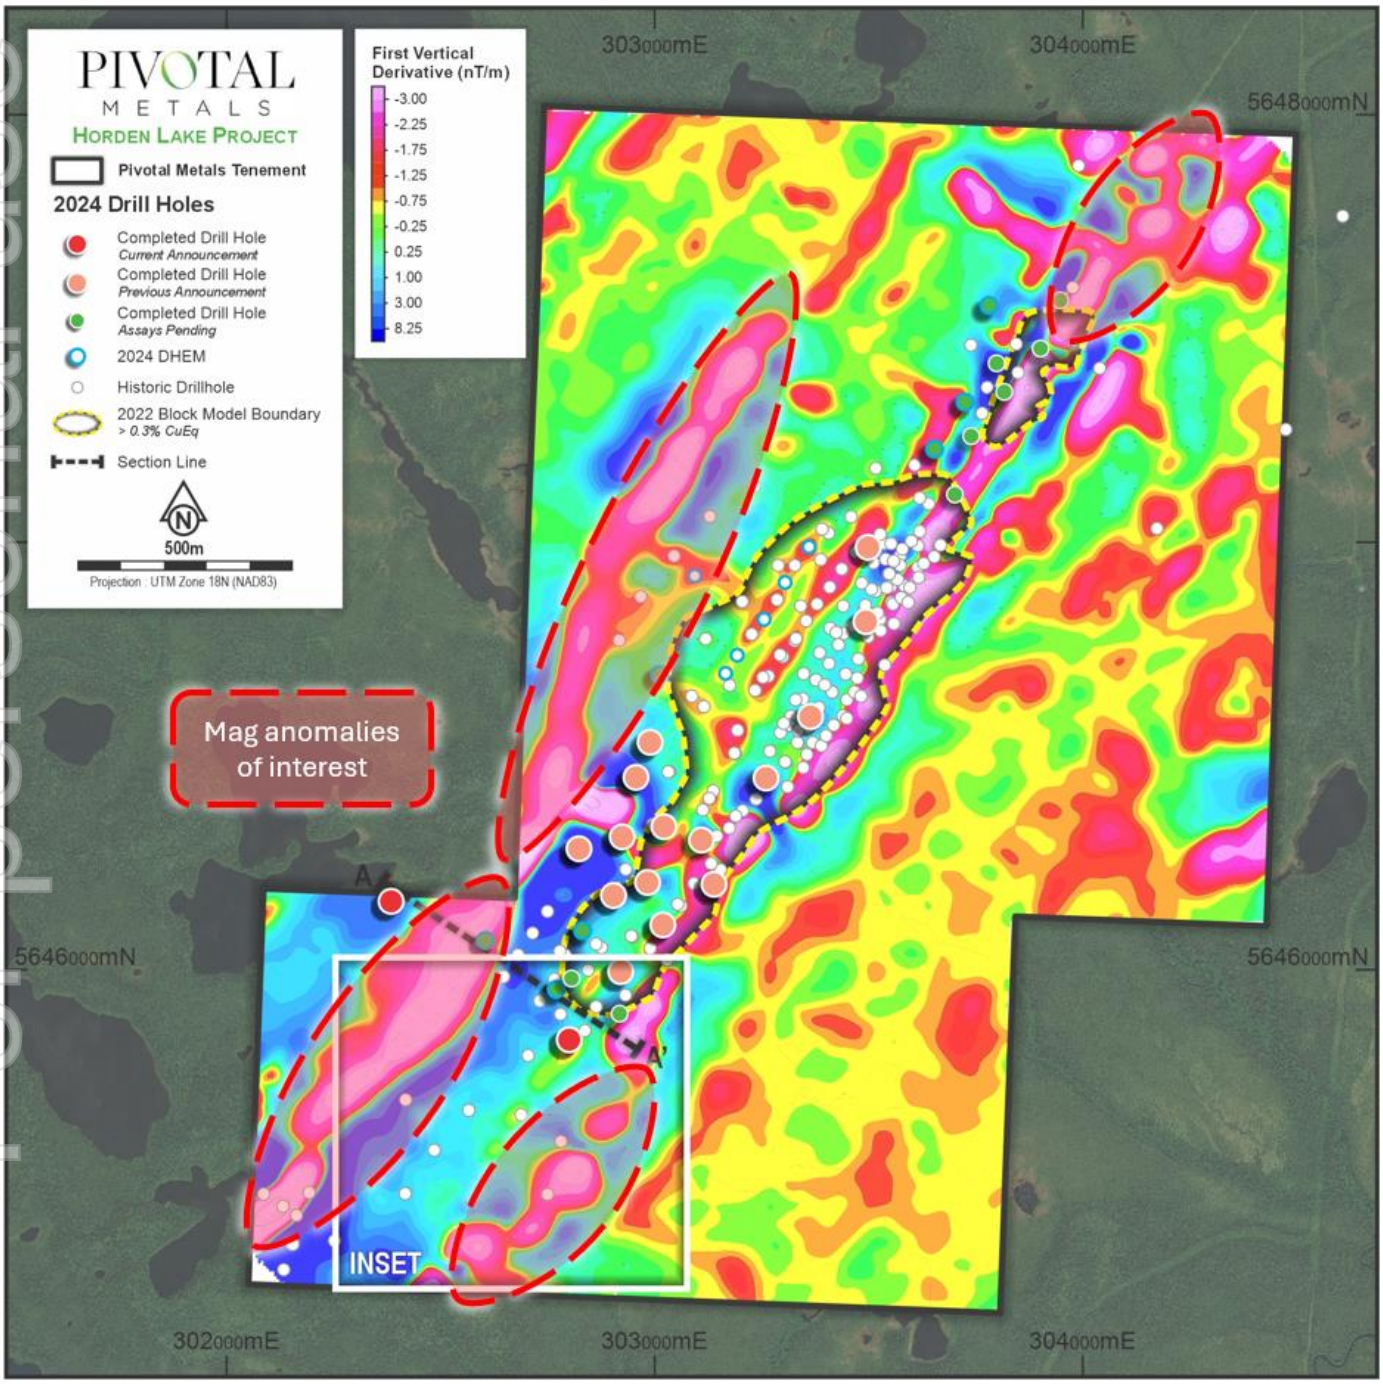

Figure 2: UAV (drone) Magnetic Survey of Horden Lake Project

New parallel "Horden West" target zone discovered

HN-24-113, the first ever hole drilled into this new Horden West mineralised trend, intersected four mineralised zones:

- 2.2m @ 0.77% CuEq (0.17% Cu, 0.13% Ni, 0.04g/t Au 0.33g/t Pd) plus additional 0.13g/t Pt, 76ppm Co, 0.4g/t Ag from 10.6m
- 1m @ 0.32% CuEq (0.24% Cu, 0.01% Ni, 0.08g/t Au) plus additional 90ppm Co, 0.4g/t Ag from 45m
- 1.1m @ 0.4% CuEq (0.08% Cu, 0.09% Ni, 0.1g/t Pd) plus additional 0.03g/t Pt, 108ppm Co 0.3g/t Ag from 186m
- 1.5m @ 0.84% CuEq (0.27% Cu, 0.08% Ni, 0.19g/t Au, 0.32g/t Pd) plus additional 0.1g/t Pt, 80 ppm Co, 1.2g/t Ag from 241m

The magmatic sulphide mineralisation intersected in the gabbro shares the magnetic and mineralisation characteristics of the main Horden Lake deposit. This is very encouraging and opens up a large new target zone, up to 1,850m of strike extent, to verify with geophysics and test with drilling, for continued resource growth on the project.

Geological model

Extensive drilling has shown that the mineralisation of the main (eastern) Horden Lake zone typically commences in gabbros as disseminated and interstitial accumulations of pyrrhotite (Po) and chalcopyrite (Cpy), both magnetic and conductive. This mineralisation continues into the footwall rocks as remobilised semi-massive and massive accumulations where the metasediment-schists and metavolcanic tuffs host the high grade massive and semi-massive mineralisation (Po, Cpy, and magnetite present), also magnetic. The Horden Lake surface magnetic trend corresponds to this mineralised footwall gabbro and metasediment contact zone.

The Horden West parallel magnetic trend was interpreted to represent a similar environment of gabbro and metasediments possibly the result of a mirrored stratigraphy about a fold axis centred between the two magnetic features (Figure 3). Mineralisation in HN-24-113 intersected two shallow zones of disseminated Po and Cpy in the gabbros within the Horden West magnetic trend at 10.6-12.8m and 45-46m, with a 14m interval of metasediments and meta-tuffs in-between.

It did not intersect sufficiently into the interpreted metasedimentary portion of the hanging-wall contact zone expected to occur west of the mineralised gabbro about this limb of the interpreted fold. Future drilling of the Horden West trend will be planned to extend further into the metasedimentary portion of the hanging-wall contact zone to capture the higher grade metasedimentary hosted mineralisation.

The Horden West magnetic trend provides an additional 1,850m of prospective Horden Lake style Cu-Ni mineralisation potential.

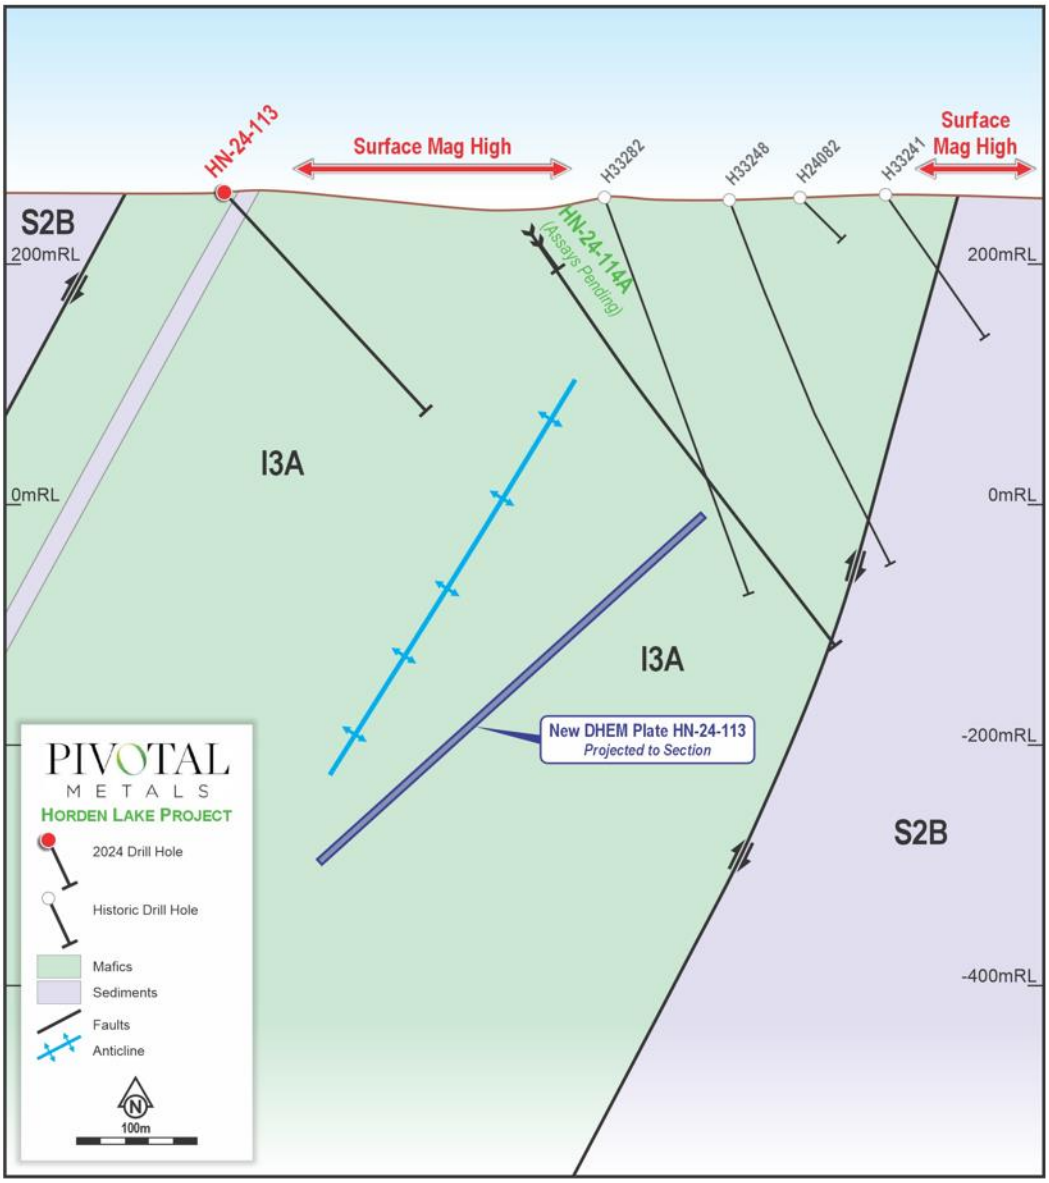

Figure 3: Section through HN-24-113 showing geological units

Downhole EM

HN-24-113 DHEM results identified a large, partially-defined, off-hole source centred at approximately 205m past EOH, and ~190m NE of the hole, with low-moderate conductance. The plate appears to define continuity of mineralisation downdip/down-plunge of the main Horden Lake zone toward the southern end.

No EM anomalies were identified around the upper parts of HN-24-113.

Along Strike Extension

The magnetics show a clear continuation of the Horden Lake trend southwest beyond the main mineralised zone, but with a slight offset to the east that appears to have misled previous exploration work. HN-24-108 drilled across the magnetic low zone, and intersected:

- 3.2m @ 1.06% CuEq (0.25% Cu, 0.18% Ni, 0.05g/t Au, 0.43g/t Pd) plus additional 0.16g/t Pt, 102ppm Co and 10.2ppm Ag from 108m

DHEM has outlined a low conductance off-hole anomaly centred at 180m downhole, positioned approximately 50m SW of the hole and extending 80m to the SW.

This plate is coincident with the strengthening of the magnetic anomaly to the SW. The magnetic signature indicates a strike extension potential of 400-600m to the SW of the main Horden Lake trend.

There are three historic holes into the SW extension anomaly. All three holes intersected wide zones of disseminated mineralisation, and in places semi-massive to massive sulphide intercepted over 1-2m. Highlights include:

- 23.7m @ 1.24% CuEq (0.52% Cu, 0.21% Ni, 0.08g/t Au, 0.17g/t Pd) plus additional 0.05g/t Pt from 33.4m in HOR-13-02
    - Including 7.9m @ 2.16% CuEq (0.96% Cu, 0.37% Ni, 0.06g/t Au, 0.28g/t Pd) plus additional 0.06g/t Pt, from 33.4m
- 54.5m @ 0.56% CuEq (0.26% Cu, 0.12% Ni) from 5.5m in H26820.

Additional historical drilling has been completed to the west of the anomaly. Shallower drill holes (H24001-3) intersected wide zones of disseminated mineralisation as shown in Figure 4, which contained narrower zones of higher grade mineralisation. The deepest hole, H33268, intersected 3 thin zones of very high copper mineralisation.

Assuming a similar dip in this area to the Horden Lake main zone, the detail magnetics indicated that it is likely that the historical drill holes were collared too far west, and drilled too short, to intersect the main zone of mineralisation.

Follow up drilling and geophysics is warranted to further test along-strike and down-plunge of this magnetic anomaly, and build on the mineralised footprint defined by historic drilling.

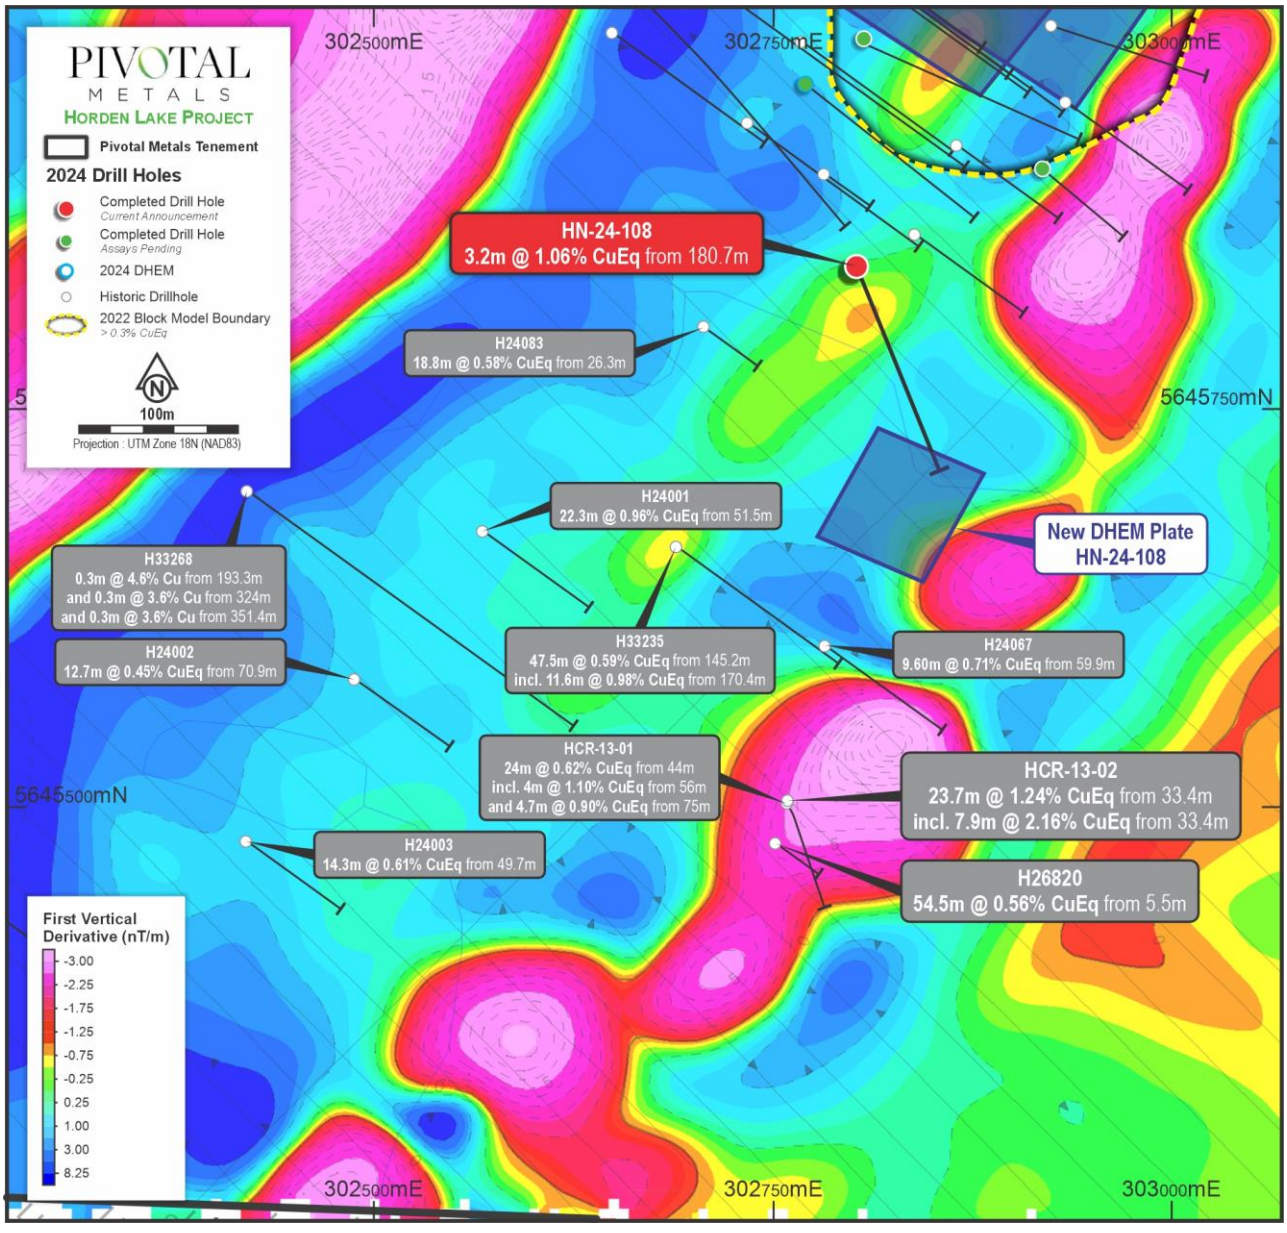

Figure 4: Along strike SW extension of the main Horden Lake magnetic trend

Background

The Horden Lake deposit was discovered by INCO Ltd. in the 1960s. Between 1962 and 1969, INCO completed geophysics and 157 diamond drill holes totalling 32,229m. At the time the Project was remote, with access only possible via float plane or helicopter. INCO focused solely on the nickel and copper content, without assaying for other metals, and given the difficult access, metal prices, and its primary nickel focus on the larger Sudbury Nickel Camp, did not proceed, working only sporadically on the Project into the 1970s.

Subsequent drilling programs by Southampton and El Condor in 2008 and 2012 completed a further 18,136m and 2,037m respectively. Multi-element assays taken as part of these programs confirmed the presence of valuable by-products such as platinum, palladium, gold, silver and cobalt, however these did not appear to be of focus, and were constrained to the central part of the deposit. In 2013, the Project was forfeited as security for a delinquent loan, and the Project sat dormant in private ownership prior to Pivotal's 100% acquisition in late-2022.

In 2022, Pivotal completed a comprehensive evaluation of all historical data, and calculated an updated Inferred and Indicated Mineral Resource Estimate totalling 27.8mt at 1.49% CuEq (refer Table 1). Owing to the limited distribution of multi-element assays, gold was only domained in the central portion of the deposit. Palladium showed high correlation to nickel and was therefore able to be extrapolated. The balance of the gold, platinum, cobalt and silver which have been observed, but not modelled, represents potential upside on the Project.

Table 1: 2022 Horden Lake Mineral Resource Estimate, broken down by resource category and open pit/underground

Category	Tonnes	Grade					Contained Metal				
		CuEq (%)	Cu (%)	Ni (%)	Au (g/t)	Pd (g/t)	CuEq (kt)	Cu (kt)	Ni (kt)	Au (koz)	Pd (koz)
Indicated	15.2	1.50	0.77	0.20	0.13	0.19	228.6	117.6	30.5	59.4	91.3
Inferred	12.5	1.47	0.67	0.25	0.02	0.20	184.3	84.0	31.4	6.9	76.7
Total	**27.8**	**1.49**	**0.74**	**0.22**	**0.08**	**0.19**	**413.9**	**201.6**	**61.9**	**66.2**	**168.0**

Category	Tonnes	Grade					Contained Metal				
		CuEq (%)	Cu (%)	Ni (%)	Au (g/t)	Pd (g/t)	CuEq (kt)	Cu (kt)	Ni (kt)	Au (koz)	Pd (koz)
Open Pit	17.3	1.38	0.67	0.21	0.08	0.19	239.6	115.7	35.6	43.9	100.5
Underground	10.5	1.66	0.82	0.25	0.01	0.13	173.9	85.9	26.3	22.3	67.5
Total	**27.8**	**1.49**	**0.74**	**0.22**	**0.08**	**0.19**	**413.9**	**201.6**	**61.9**	**66.2**	**168.0**

The Horden Lake Mineral Resource Estimate has been prepared and reported in accordance with the JORC Code (2012). The information in the Report that relates to Technical Assessment of the Mineral Assets or Exploration Results is based on information compiled and conclusions derived by Dr. Jobin-Bevans and Mr. Simon Mortimer, both Competent Persons as defined by JORC Code (2012). Nothing has come to the attention of the Company that causes it to question the accuracy or reliability of the former owner's estimates, but the acquirer has not independently validated the former owners' estimates and therefore is not to be regarded as reporting, adopting or endorsing those estimates.

Refer to ASX announcement dated 16 November 2022 "Outstanding Horden Lake 27.8Mt JORC estimate". The Company confirms that it is not aware of any new information or data that materially affects the information included in the relevant market announcement and that all material assumptions and technical parameters underpinning the estimates in the relevant market announcement continue to apply and have not materially changed.

This announcement has been authorised by the Board of Directors of the Company.

For further information, please contact:

Pivotal Metals

Ivan Fairhall
Managing Director
P: +61 (08) 9481 0389
E: ivan.fairhall@pivotalmetals.com

Investor and Media Enquiries

Peter Taylor
NWR Communications
P: +61 (0) 412 036 231
E: peter@nwrcommunications.com.au

About Pivotal Metals

Pivotal Metals Limited (ASX:PVT) is an explorer and developer of world-class critical mineral projects. Pivotal holds the recently acquired flagship Horden Lake property, which contains a JORC compliant pit constrained resource of 27.8Mt at 1.49% CuEq indicated and inferred resource, comprising copper, nickel, palladium and gold. Pivotal intends to grow the mineral endowment of Horden Lake, in parallel with de-risking the project from an engineering, environmental and economic perspective.

Horden Lake is complemented by a battery metals exploration portfolio in Canada located within the prolific Belleterre-Angliers Greenstone Belt comprised of the Midrim, Laforce, Alotta and Lorraine high-grade nickel copper PGM sulphide projects in Quebec. Pivotal intends to build on historic exploration work to make discoveries of scale which can be practically bought into production given their proximity to the world famous Abitibi mining district.

To learn more please visit: www.pivotalmetals.com

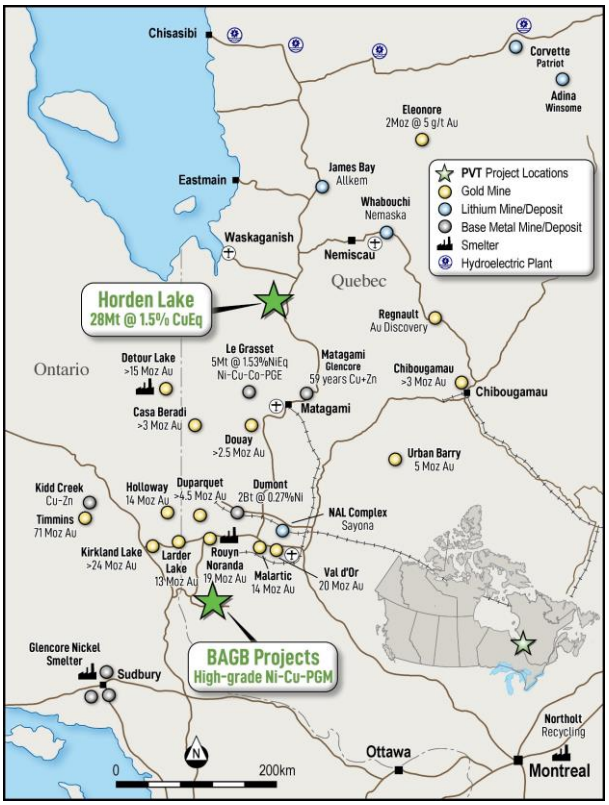

Figure 5: Pivotal Metals Quebec battery metals portfolio

Forward Looking Statements Disclaimer

This announcement contains forward-looking statements that involve a number of risks and uncertainties. These forward-looking statements are expressed in good faith and believed to have a reasonable basis. These statements reflect current expectations, intentions or strategies regarding the future and assumptions based on currently available information. Should one or more of the risks or uncertainties materialise, or should underlying assumptions prove incorrect, actual results may vary from the expectations, intentions and strategies described in this announcement. No obligation is assumed to update forward looking statements if these beliefs, opinions, and estimates should change or to reflect other future developments.

Competent Person Statement

The information in this announcement that relates to Horden Lake exploration results has been prepared and reported in accordance with the JORC Code (2012). The information in this announcement that relates to Technical Assessment of the Mineral Assets or Exploration Results is based on information compiled and conclusions derived by Mr Eddy Canova, a Competent Person as defined by JORC Code (2012). Mr Canova is a Professional Geologist Ordre des géologues du Québec OGQ PGeo and an employee of Pivotal Metals. Mr Canova has sufficient experience that is relevant to the Technical Assessment of the Mineral Assets under consideration, the style of mineralisation and types of deposit under consideration and to the activity being undertaken to qualify as a Practitioner as defined in the 2015 Edition of the "Australasian Code for Public Reporting of Technical Assessments and Valuations of Mineral Assets", and as a Competent Person as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". The Author consents to the inclusion in the Announcement of the matters and the supporting information based on his information in the form and context in which it appears.

Certain information in this announcement also relates to prior drill hole exploration results, are extracted from the following announcements, which are available to view on www.pivotalmetals.com.

- 2 May 2024: HN-24-92/93, 16 May 2024: HN-24-94/95, 6 June 2024: HN-24-96/97, 2 July 2024 HN-24-98/99/100, 15 July 2024: HN-24-101/102/103/104, 24 July 2024: HN-24-105/107/109
- 16 November 2022: Historic holes

PIVOTAL METALS

Table 2: Drill hole collar summary for 2024 program[1]

Hole ID	Depth	UTM-E	UTM-N	Elevation	Azimuth	Dip	Size
HN-24-92	138.00	303259.16	5646449.27	259.38	146.35	-44.47	NQ
HN-24-93	125.80	303109.13	5646296.70	259.56	125.86	-46.19	NQ
HN-24-94	215.90	303016.88	5646335.21	259.12	125.87	-52.29	NQ
HN-24-95	223.75	303168.04	5646470.02	259.78	125.83	-55.15	NQ
HN-24-96	288.00	302920.62	5646302.30	259.74	126.62	-58.29	NQ
HN-24-97	323.08	302989.88	5646528.89	258.07	113.61	-52.50	NQ
HN-24-98	311.11	302950.59	5646448.73	257.43	127.02	-57.48	NQ
HN-24-99	69.00	303136.95	5646199.85	259.16	126.13	-47.10	NQ
HN-24-100	102.00	303019.99	5646107.38	255.51	124.70	-41.05	NQ
HN-24-101	192.00	302986.79	5646203.08	259.00	125.78	-51.31	NQ
HN-24-102	255.00	302905.17	5646171.52	258.83	126.18	-59.09	NQ
HN-24-103	148.50	302924.43	5645990.17	259.91	105.35	-45.46	NQ
HN-24-104	354.00	302820.50	5646278.68	258.04	127.35	-57.10	NQ
HN-24-105	268.70	303495.71	5646987.22	259.12	123.99	-70.41	HQ
HN-24-106	108.00	302918.05	5645901.22	262.91	125.23	-51.96	NQ
HN-24-107	159.00	303495.59	5646810.58	259.49	123.99	-65.58	HQ
HN-24-108	**213.00**	**302802.32**	**5645839.30**	**259.41**	**153.83**	**-49.38**	**NQ**
HN-24-109	156.00	303366.75	5646592.16	259.84	85.29	-58.36	HQ
HN-24-110	216.00	302806.30	5645979.34	259.29	110.12	-47.71	NQ
HN-24-111	210.00	302770.39	5645953.69	259.38	126.03	-51.86	NQ
HN-24-112	399.60	303012.86	5646687.64	257.38	118.25	-61.53	NQ
HN-24-113	**252.00**	**302386.00**	**5646163.00**	**259.44**	**120.00**	**-45.00**	**NQ**
HN-24-114*	78.00	302603.57	5646068.66	259.12	127.87	-55.63	NQ
HN-24-114A	471.00	302603.77	5646068.86	259.12	127.87	-55.63	NQ
HN-24-115	213.80	303654.53	5647219.23	262.40	126.11	-57.95	NQ
HN-24-116	219.00	303728.31	5647324.10	265.21	126.04	-56.27	NQ
HN-24-117	126.00	303704.24	5647108.31	259.35	124.98	-53.50	NQ
HN-24-118	120.00	303817.70	5647328.22	267.62	125.04	-45.00	NQ
HN-24-119	204.00	303795.86	5647415.47	266.88	125.72	-51.97	NQ
HN-24-120	246.00	302836.47	5646089.35	259.45	126.30	-58.51	NQ
HN-24-121	123.00	303900.90	5647450.51	268.93	124.57	-52.57	NQ
HN-24-122	277.20	303781.48	5647552.91	268.94	126.80	-51.96	NQ
HN-24-123	171.00	303742.05	5647246.25	264.10	125.09	-62.43	NQ
HN-24-124	120.00	303924.07	5647556.29	268.02	125.00	-55.00	NQ

* hole abandoned

[1] For details of the historical holes referenced in this release, refer to ASX announcement dated 16 November, 2022 "Outstanding Horden Lake 27.8Mt JORC estimate".

Table 3: All intersections. Lower cut 0.3% CuEq over 1m (max dilution 5m). Higher cut 1.1% CuEq over 1m (5m max dilution).

Hole ID	Width (m)					CuEq %	*Plus additional*			From (m)
		Cu%	Ni%	Au g/t	Pd g/t		Co ppm	Pt g/t	Ag g/t	
HN-24-108										
HN-24-108	3.2	0.25	0.18	0.05	0.43	**1.06**	102	0.16	10.2	180.7
Including	2.4	0.30	0.22	0.06	0.55	**1.31**	114	0.21	12.8	180.7
HN-24-113										
HN-24-113	2.2	0.17	0.13	0.04	0.33	0.77	76	0.13	0.04	10.6
HN-24-113	1.0	0.24	0.01	0.08	0.00	0.32	90	0.00	0.08	45
HN-24-113	1.1	0.08	0.09	0.00	0.10	0.40	108	0.03	0.00	186
HN-24-113	1.5	0.27	0.08	0.19	0.32	0.84	80	0.10	0.19	241

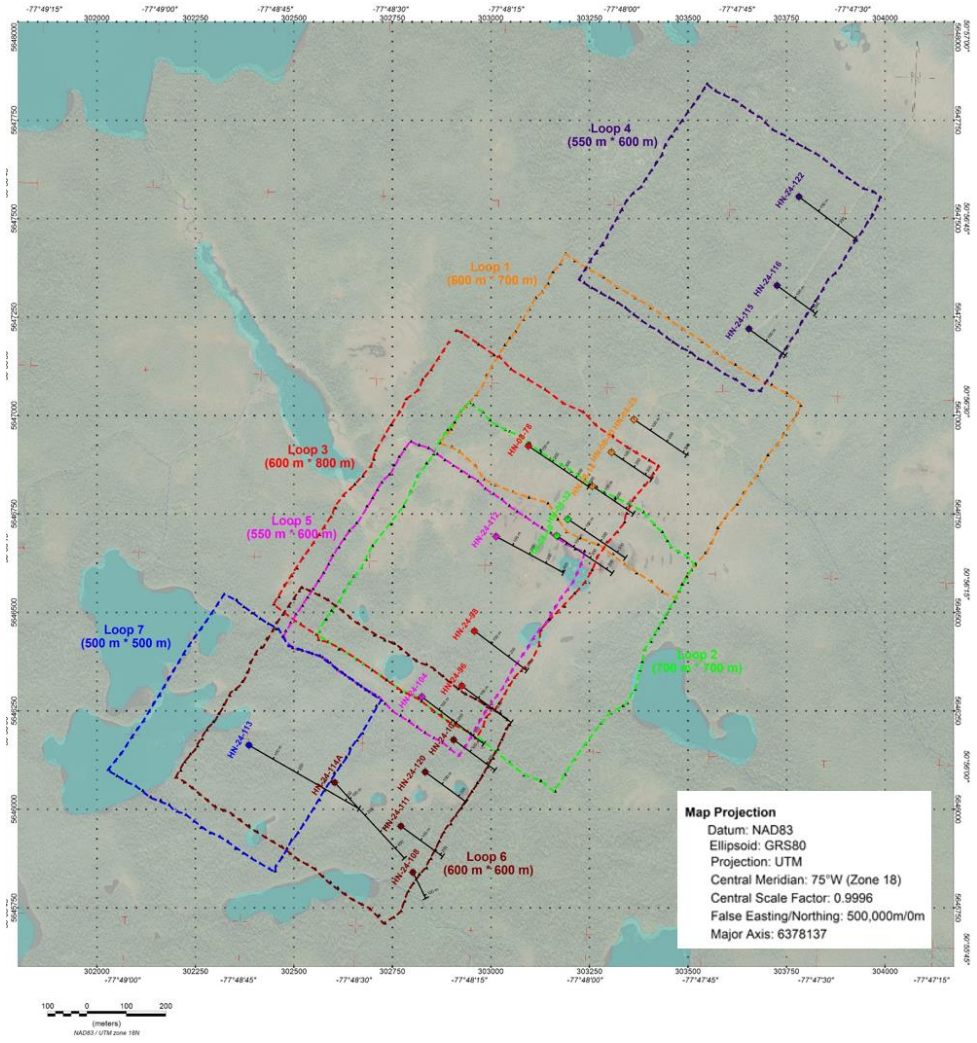

Figure 6: DHEM Loop Locations

PIVOTAL METALS

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

JORC Code criteria and explanation	Commentary
Sampling techniques • ***Nature and quality of sampling (e.g., cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.*** • ***Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.*** • ***Aspects of the determination of mineralisation that are Material to the Public Report.*** • ***In cases where 'industry standard' work has been done this would be relatively simple (e.g., 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g., submarine nodules) may warrant disclosure of detailed information.***	2024 Pivotal Diamond Drilling • Drilling performed by Forage Orbit Garant, January 26 to March 20, 2024. All holes spotted in the field with a Garmin GPS MAP 65s, and drill hole orientations all marked in the field with a Suunto MC-2 Compass (Declination 13.5ºW). During drill setup, the TN-14 instrument was used to align the drill with an allowed error of less than 0.5º and set drill tower to the drill hole inclination, allowing an error of less than 0.5º. • Drilled 34 holes, 31 NQ holes (47.6mm dia.) and 3 HQ holes (63.5 mm dia.) for a total of 7097.44 m. The casing depth and bedrock were marked on wooden blocks in the core boxes, then 3 m drill runs were marked on wood blocks in 3 m intervals (eg.15 m, 18, 21 etc). Any lost core was also marked in the box. • A field quick-log was carried out in the field to follow the geology and mineralized zones, entered into a logging software, Geotic, and holes were stopped 30 m after the mineralized zones, usually in baren metasediments way passed the gabbro/metasediment contact. • A technician would all orient the core and measure the core from the start to the end of the hole in 1 m intervals and marked. The core recoveries are marked over a 3 m interval, RQD (Rock Quality Determination all competent core greater than 10 cm), logging was done identifying major units using the Quebec Ministry Lithology codes, minor units (narrower), and description of other characteristics as alterations, structures, veins, and mineralization. Any core orientations that was less than 15º off the previous or following recording would qualify and allowed the measurements of structures put into Geotic calculating the orientation of the structure. The down hole survey was recorded at every 3 m with a Gyro allowing for the follow-up of the hole in 3-D space, these all appear in Geotic. Magnetics was recorded at every meter with an MPP-EM2S and Androide recorder, the readings are entered into Geotic and viewable in section. Sampling is marked on the core, sample widths of 0.5 m to 1.5 m and in mineralized sections generally 1 m or less. All sampling limits will respect lithological limits and vein limits. ALS booklets are used for assigning unique sample numbers, and these are entered into Geotic. During the logging will also request for density readings by ALS in every unit and at every sample in the mineralized zones. Also recorded the densities by water displacement and weight of core dry and core wet and with the formula obtain the Specific Gravity or Density (PS/VOL(PS-PE). Three historical diamond drilling programs with data available: 2008 Southampton Diamond Drilling (Kelso et al., 2009): • NQ diamond drill core (47.6 mm dia.) was mechanically split in half; half for sample and half for reference. • Typical sample intervals were from 0.5 to 2.0 m, based upon lithology and mineralization, but smaller intervals taken where appropriate. • Core samples collected from mineralized intervals and from 10 to 15 m of the hanging and footwall of the

JORC Code criteria and explanation	Commentary
	mineralized section. • In total, 6,551 samples were collected. • Descriptive information, including drill hole number, sample interval and character of mineralization, recorded using DHLogger software. • Due to limited early-stage understanding of mineralized zone geometry, samples were not necessarily 'true' thickness 2012 El Condor Drilling (El Condor, 2012): • HQ diamond drill core (63.5 mm dia.) was mechanically split in half; half for sample and half for reference. • Typical sample intervals were from 0.5 to 1.5 m, based upon lithology and mineralization, but smaller intervals taken where appropriate. • Descriptive information, including drill hole number, survey information, downhole survey, magnetic susceptibility, RQD, specific gravity, sample interval and character of mineralization, alteration recorded in Excel spreadsheets 1963-1968 INCO Drilling (WGM, 1993; INCO, 1963-1969): • Some holes noted as BQ size core (36.5 mm dia.). • Details of sampling techniques not available and not reviewed by Competent Person
Drilling techniques • ***Drill type (e.g., core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g., core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).***	• Pivotal: Diamond core size are specified above NQ (47.6 mm diameter) and HQ (63.5 mm diameter). Casing, HW, was driven through the overburden and 0.5 m to 2 or 3 m into the bedrock to stabilize the casing, the rods were then reduced to NQ for the drilling into the bedrock. 2 shells of 45 cm and 1 hexagonal stabilizing bar used to keep the hole stable reduce deviation. Core orienter, tool ACTIII used at every 3 m and marking the core at the end of the run and marking a line representing the bottom of the core in the hole and allowing for structural reading if 2 sections 3 m apart can have lines less than 15º apart. A Gyro Sprint IQ Tool used to record the hole orientation at every 3 m heading up the hole while pulling out the rods. • Southampton: NW casing (76.2 mm dia.) set through overburden. Bedrock diamond drilling was standard tube NQ core (Kelso et al., 2009). • El Condor: HW casing (101.6 mm dia.) set though overburden. Bedrock diamond drilling standard tube HQ core (El Condor, 2012). • INCO: Some holes noted as BQ size (INCO, 1964-1969). • Details of drilling techniques not available and not reviewed by a Competent Person.
Drill sample recovery • ***Method of recording and assessing core and chip sample recoveries and results assessed.*** • ***Measures taken to maximise sample recovery and ensure representative nature of the samples.*** • ***Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.***	Pivotal (2024) • A technician would all orient the core and measure the core from the start to the end of the hole in 1 m intervals and marked. All of the core is assembled together and fitted together and to follow through to the end of the hole, sections that are broken or fragmented core will be gathered together, this would be the only areas of poor recoveries. The geotechnical table in Geotic will have the actual core recoveries over a 3 m interval and are marked in a table and only if the core is broken would the meterage be less than 3m, RQD (Rock Quality Determination all competent core greater than 10 cm), Number of fractures and joints are recorded and with the most frequent angle marked. The rock competency and hardness are recorded

JORC Code criteria and explanation	Commentary
	as well El Condor (2012) • Average core recovery in 2012 drilling ranged from 93.4% to 98.3% • No description of RQD estimation method accompanied drill core logs. • Overall recovery good enough to avoid sample bias. Southampton (2008): • Average core recovery ranged from 90% to 95% (Kelso et al., 2009). • No description of core recovery estimation method is provided in historical Technical Report (Kelso et al., 2009). INCO (1960s): • Details of core recovery for INCO drilling were not available or reviewed by a Competent Person.
Logging • ***Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.*** • ***Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.*** • ***The total length and percentage of the relevant intersections logged.***	• Oriented core was logged for geology, structural, technical, veins, and minerals (RQD, Magnetism, Main Lithology, Sub-Lithology, Structures, Alteration, Veins, Minerals (Sulphides), and Samples. Samples were marked and referred to the meterage markings on the core and marked in the sample booklet and in the Geotic assay table. • The Competent Persons have reviewed historical drill logs (El Condor, 2012) but have not verified the information independently for quality control and quality assurance nor been to site. In the CPs opinion the historical core has been geologically and geotechnically logged to a level of detail to support future Mineral Resource Estimation, mining studies and metallurgical studies. Core logs were made for the full length of the core and are qualitative in nature. Both wet and dry core photographs exist for 2008 and 2012 drilling programs.
Sub-sampling techniques and sample preparation • ***If core, whether cut or sawn and whether quarter, half or all core taken.*** • ***If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.*** • ***For all sample types, the nature, quality and appropriateness of the sample preparation technique.*** • ***Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.*** • ***Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.*** • ***Whether sample sizes are appropriate to the grain size of the material being sampled.***	2024 Pivotal Drilling • The core was marked for the sampling, markings in red crayon with meterage corresponding to the measurements marked in the sample booklet and in Geotic assays. The core is half cut by rock saw with the bottom half of the core (quarter core if size is HQ) is placed in plastic sample bags with the sample tag and sample number on the plastic bag. The sample booklet tag is put at the beginning of the sample, samples are minimum 0.5 m to 1 m in mineralized sections and up to 1.5 m in lightly or unmineralized sections. Sample limits always respect lithology contacts, veins, structures and alteration limits. There are in a sequence of 100 samples, 5 blanks (put at 10, 30, 50, 70 and 90) and 5 standards alternating between 2 OREAS Standards especially selected for magmatic, mafic intrusive and metasediments with Cu+Ni+Pd+Pt+Au mineralization, standards OREAS683 and OREAS86, 5 standard samples (put at 20, 40, 60, 80, and 100). Assay results of 2 standard deviations off the mean value for the standards is allowed before triggering a reanalysis of 10 samples around the standard or blank. The marked core for sampling is split with a diamond rock saw with water, the upper half of NQ core is kept in the core box for record and review and the bottom half is put into a sample bag with an ALS sample tag, zip locked and put into a white rice bag and filled with 5 or 6 samples in the white rice bags, with sample numbers marked on the transparent individual sample bags and the sequence on the larger white rice bags, then marked and sealed with a zip lock tie. The lab will also include its standards, blanks and duplicates. Eventually a check

JORC Code criteria and explanation	Commentary
	on the lab, ALS Global will be carried out Historical Drilling • It is reported (Kelso et al., 2009; El Condor, 2012) that core was split or sawn and sampled as half-core in marked intervals with remaining core kept for reference and stored. The Competent Person has not independently verified this information for quality control and quality assurance nor been to the sites and therefore reporting as stated. • Samples for both programs were prepared and analysed by standard mineral geochemistry methods at a primary certified lab (Activation Laboratories (Actlabs), Ancaster Ontario) and to Laboratoire Expert Inc. of Rouyn-Noranda, Quebec (Kelso et al., 2009). • Quality control procedures for 2008 drilling were reviewed, and included field reject and pulp duplicates (Kelso et al., 2009). Some inefficiencies in in core processing procedures were noted. • Quality control procedures for 2012 drilling were reviewed, and included field duplicates, and insertion of quartz blanks and blind standards (El Condor, 2012).
Quality of assay data and laboratory tests • ***The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.*** • ***For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.*** • ***Nature of quality control procedures adopted (e.g., standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.***	2024 Pivotal Drilling • The samples are all sent to ALS Val-d'Or for analysis. All samples were prepped by PREP-31 method, samples are weighed, wet and dry, samples dried overnight in an oven, crushed to 70% passing -2mm, then riffle split to create a 250g sample and pulverized split to 85% passing 75 microns (0.075mm), then samples prepared for ME-ICP61 4 acid ICP-AES Multi-Element Package with 48 elements with principles being Ag+Co+Cu+Ni+Pb+Zn in a sample of 10g of pulp, and PGM-ICP23 analysis for Pt+Pd+Au by fire assay and ICP-AES finish, a 30g pulverized sample. The assays are in g/t for Au+Pd+Pt, % for samples over 10,000ppm with Cu+Ni+Co, Ag is in ppm, all the other elements are in ppm and %. The QA/QC samples inserted in the core samples is described above and a QA/QC sample is inserted at every 10th sample. The specific gravity sampling is done in every unit and at every sample in the mineralized sections, done with OA-GRA08 method and specific gravity is done on the core. Verifications are carried out of the Specific Gravity by carrying out water displacement of the core measured, weight is measure when dry and when wet (trained technician at the ACT Lab facilities over several days). Samples are also selected for whole rock analysis with oxides, 14 oxides and LOI and total oxides that should total 100%. • Tools used to help in the logging is an MPP-EM2S with Androide to record the readings, readings taken every meter to record the magnetic susceptibility of the rock. The OXFORD X-MET7500 PXRF handheld Mining Analyzer for various elements or minerals used to identify sulfides and rock units. Used to assist the geologist in identifying minerals and metal assays as well. Historical Drilling • Both the 2008 and 2012 drilling programs included a QA/QC program. • No details of QA/QC procedures for INCO drilling were available or reviewed by a Competent Person. • The 2008 drilling program sampling included one blank and two of three (high, medium, and low) Cu-Ni-PGE standards, as well as laboratory pulp and reject duplicates. Samples were analysed for gold (Au), palladium (Pd), and platinum (Pt) through fire assay, and all other elements (31 including Cu and Ni) were analysed using aqua regia digestion with an ICP-OES finish. Five percent of the sample database (141 coarse reject samples) and 17 QC samples were sent to Accurassay Laboratory for analysis as a quality

JORC Code criteria and explanation	Commentary

control check.

- Extensive QA/QC checks, including reanalysis of failed (outside 2sδ) samples concluded that Cu and Ni outliers were acceptable for resource estimation and that 'the re-assay by Accurassay of 5% of the samples used in the resource model calculation confirms that the original assays by Actlabs are of good quality (Kelso et al., 2009).
- The Competent person has not independently verified this information for quality control and quality assurance to comment on the nature, quality and appropriateness of the assaying and laboratory procedures used..
- 2012 drilling program sampling included one field duplicate, one quartz blank and one of three CRMs every 25 samples, as well as laboratory reject and pulp duplicates.
- Samples were analysed for gold (Au), palladium (Pd), and platinum (Pt) through fire assay, and other elements (36) by four-acid digestion and ICP-MS analysis. Overlimit for Cu and Ni were reanalysed by ICP-OES (El Condor, 2012).
- It is not clear whether external check analysis was performed in the 2012 drilling.

2024 DHEM

- The 2024 DHEM survey was completed by TMC Geophysics.
- The surveys were completed with time domain EM equipment
- TX loop: Refer table below loop details, **Figure 6** for loop location.
- Transmitter: 4.8kw for up to 30 amps, of 60 amps in dual mode
- Receiver: CDR-4, 24-bit ADC resolution, operated in cable synchronization mode.
- Sensor: B Field X-Y-Z Components. Fluxgate Sensor, RAD tool orientation with 3 axis magnetometer, and 3 axis accelerometer
- Sensor dB/dt in 3 components, ferrite cored induction sensor. Pressure tested to 2800m, RAD tool orientation with 3 axis magnetometer, and 3 axis accelerometer
- Nominal sample interval of 5 or 10 m with one of the seven surface loops laid out for this campaign At each station, the standard Primary Pulse was measured, as well as 20 to 39 channels sampled in the Tx shut-off ramp time

The EM measurements were achieved using different time base (e.g. 16.66, 50, 150, or 500 ms) on the first holes surveyed, whilst also testing induction and fluxgate sensors. Due to the highly conductive nature of the mineralization, the measurements were finally completed with a fluxgate sensor using a time base of 500 ms.

Hole	Type of EM Sensor & Measurement	Tx Loop & Dimensions	Time Base (ms)	Off Time Channels	Ramp (ms)	Current (A)
HN-08-14, HN-08-25, HN-08-40	Fluxgate-BField	Loop 1 600 m * 700 m	150	28	1.5	19.1
HN-08-32	Induction-dB/dt	Loop 2 700 m * 700 m	16.66	20	1.5	19
HN-08-32	Fluxgate-B-Field	Loop 2 700 m * 700 m	16.66	20	1.5	19
HN-08-60	Fluxgate-B-Field	Loop 2 700 m * 700 m	50	22	1.5	19
HN-08-60	Fluxgate-B-Field	Loop 2 700 m * 700 m	150	28	1.5	19
HN-08-78, HN-24-96, HN-24-98	Fluxgate-B-Field	Loop 3 600 m * 800 m	500	39	1.5	18
HN-24-115, HN-24-116, HN-24-122	Fluxgate-B-Field	Loop 4 550 m * 600 m	500	39	1.5	20

<table>
<tr><th>JORC Code criteria and explanation</th><th>Commentary</th></tr>
<tr><td></td><td>
<table>
<tr><td>HN-24-104, HN-24-112</td><td>Fluxgate-B-Field</td><td>Loop 5 550 m * 600 m</td><td>500</td><td>39</td><td>1.5</td><td>18</td></tr>
<tr><td>HN-24-102, HN-24-108, HN-24-111, HN-24-114A, HN-24-120</td><td>Fluxgate-B-Field</td><td>Loop 6 600 m * 600 m</td><td>500</td><td>39</td><td>1.5</td><td>16</td></tr>
<tr><td>HN-24-113</td><td>Fluxgate-B-Field</td><td>Loop 7 500 m * 500 m</td><td>500</td><td>39</td><td>1.5</td><td>18</td></tr>
</table>

Data was processed by Russell Mortimer of Southern Geoscience Consultants. EM modeling constrains the numerical solution by trying to simultaneously match the calculated data and measured data of the 3 components. The modeling presented by Russell Mortimer provides multiple model scenarios for the latest channels/strongest conductors relating to the semi-massive to massive sulphide mineralisation at Horden Lake=. EM plate modeling is the best fit for this Horden Lake sulphide mineralisation and reproduces measured field responses, it can only "globally" reproduce the shape of the measured data profiles. The EM modeling has been focussed on the high conductance conductive plates (10,000 to 30,000+ Siemens). EM modeling generates plates where BHEM surveys intercept the mineralization, in this case in-hole anomalies, or away from the hole as off-hole anomalies

2024 Magnetics Survey
• In May 2022, a drone magnetic survey was carried out for across the entire Horden Lake claim area by Geophysique TMC.
• A total of 139.6 line km of surveying was flown, at a line spacing of 34 m and mean flying height of 24.5m.
• Flight lines were oriented N315 degrees (UTM)which is roughly perpendicular to the main NE-SW-trending deposit. The drone was programmed pre-flight by experienced certified pilots.
• A Scintrex CS-VL cesium vapour magnetometer, 15,000nT and 105,000nT with a sensitivity of 0.0006nT/√Hz, mounted on a 5 m tether beneath the drone.
• The drone navigates using two ZED-F9P dual frequency GPS receivers (one drone mounted, one at base setation) communicating via 900 Mhz telemetry link. A base magnetometer was used to correct for diurnal noise.
Final data processing was carried out by Marc Boivin, P.Geo. using Geosoft OASIS Montaj. The flight path, recorded by the acquisition program as WGS 84 latitude/longitude, was converted into the WGS84 Datum, UTM Zone 18N.
</td></tr>
<tr><td>Verification of sampling and assaying
• The verification of significant intersections by either independent or alternative company personnel.
• The use of twinned holes.
• Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.
• Discuss any adjustment to assay data.</td><td>• The significant intersections are selected by using the cutoff CuEq grade of 0.3%CuEq in Geotic to select the best intersections throughout the hole, and the intersection is verified and the limits may be modified.
• No twinned holes were used to verify grades in an adjacent hole; however, the program was designed to tighten the spacing of the drill holes and to extend the mineralized zones to the south of the core of the mineralized zone and to the north of the mineralized zone, and also to extend mineralization down at depth. The use of Bore Hole EM (BHEM) with Crone instrumentations and four loops (Diagram) were setup around the holes surveyed. Survey should outline extensions downhole and off hole along strike.
• Significant intersections have been reported historically. The Competent Persons have not independently verified this information for quality control and quality assurance.
• The 2008 drilling program informing the historical resource estimate employed an external check lab (Accurassay Laboratory) (Kelso et al., 2009).</td></tr>
</table>

JORC Code criteria and explanation	Commentary
	• No external check lab appears to have been used for the 2012 drilling program. However, despite there not being a complete record available for the QA/QC, the program was managed by the same QA/QC personnel who oversaw the 2008 Southampton drilling and so it is likely that similar protocols were followed.
Location of data points • ***Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.*** • ***Specification of the grid system used.*** • ***Quality and adequacy of topographic control.***	The grid system is in UTM NAD 83 Zone 18 SCRS HT2 CGVD28. 2024 Pivotal Drilling and 2024 Downhole EM • 2024 drill hole collars were surveyed with a Trimble mobile receptor GNSS R12i precision of 2cm or 0.02 m for UTM-E, UTM-N and Elevations precision is 5cm or +/-0.05m, and a base station Trimble R10. There were 3 control points put in on the Project, metallic stakes with a medallion with the following identifications JCL-2024-1, JCL-2024-2 and JCL-2024-3. The point JCL-2024-1, a base station GPS Trimble R10 was installed to do satellite recording reading during 8 hours to do a precise point positioning so that the surveying of all the points were recorded. • All down hole survey orientations were taken with a Gyro Sprint IQ Tool Multishot taken every 3m up the hole while pulling out the rods, After 15 m passed the casing a singleshot was taken to control the orientation of the hole and at every 50 m down the hole. The Core Orientation Tool ACTIII was used at every 3 m and marked on the core for core orientation. • Refer to Table 2 in this announcement body for locations of 2024 drill holes, and announcement dated 16 November, 2022 for historic drilling. • A handheld non-differential GPS was used to determine positioning of the loop for the DHEM survey. This GPS has an accuracy greater than +/- 5m for topographic and spatial control. Historical drilling • 2008 and 2012 drill hole collars were surveyed using Trimble GEO XH using Zephyr™ external antenna and base corrected using GPS Pathfinder software. The results of the DGPS survey were utilized for the transformation of historical INCO data from local grid to UTM space (+/- 10cm accuracy). • Location accuracy of drill collars is considered adequate for early-stage resource estimation. • Down hole survey data collected with Flexit and Reflex Maxibore instruments. Reflex Maxibore is an advanced instrument which is considered more accurate in magnetically disturbed environments. • Survey data with Reflex Maxibore collected at every 3 m from hole bottom and transferred digitally into database. • There are no accurate locations provided for the INCO drill hole collars and the drill holes were spotted on a local grid which was later transformed to UTM coordinates by Caracle Creek on the basis of some INCO drill hole collar locations found and GPS'd in the field. • Location of historical drill holes can be found in ASX Announcement dated 16 November 2022. • A complete re-survey of historical holes intersecting the resource is planned prior to any resource update.
Data spacing and distribution • ***Data spacing for reporting of Exploration Results.*** • ***Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity***	• Southampton (2008) drill holes spaced 50 m apart along gridlines (Kelso et al., 2009). • The mineralized zone was modelled on sections at intervals of approximately 50 m. The zones were extended 25 m along strike to the north-east and south-west, beyond the last section drilled. • Drill density (168 holes) sufficient for an Inferred and Indicated resource estimate (Kelso et al., 2009).

JORC Code criteria and explanation	Commentary
appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • *Whether sample compositing has been applied.*	• Sample compositing at 1.5 m in mineralized zones applied (Kelso et al., 2009). • The data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource estimation procedure(s) and classifications applied.
Orientation of data in relation to geological structure • *Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.* • *If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.*	• Oriented core allows measurement of Alpha angle of the structure and using a grid transparency graph sheet to measure the Beta. The Geotic logging software calculates the angle and the orientation of the structure, structure of foliation, shears, contacts, and veins • From map presentation and cross-sections, drill hole azimuth and inclination appear to have been designed to minimize sample bias (Kelso et al., 2009; El Condor, 2012). • No bias is considered to have been introduced to the sampling.
Sample security • *The measures taken to ensure sample security.*	• The 2024 core quick log description and orientation was carried out at the drilling camp, ~45km from the drill site, a camp site at the 167km on the Route 109. All the core was packed tightly and transported to a logging facility in Val-d'Or, 450 km south of the Project. All samples are precisely marked and recorded in the sample booklet and in the Geotic database. The core is half cut by rock saw with the bottom half of the core put into the plastic sample bags with the sample tag and sample number on the plastic bag. Five or six samples are put into a white rice bag, identified and with sample sequence marked. The sample requisition sheet for assay sample list and assay methods is brought with the rice bags to ALS in Val-d'Or and handed over to the reception area for the sample. An email for the reception of the samples and work order sheet is sent to Pivotal Metals. • All samples in 2008 were tagged using pre-printed sample tags with a unique 5-digit number and bagged in individual plastic bags. Ten individual bags were collected in rice bags prior to shipping. the core was stored at Horden Lake camp which was a very remote location., Only drilling company staff and the Caracle Creek geologists had access. • The samples were transported from Matagami to Laboratoire Expert, in Noranda by bus (Expedibus) and by a private freight company (Rona Inc.) to Actlabs in Ancaster Ontario (Kelso et al., 2009). • 2012 drilling program conducted by Caracle Creek using same camp and laboratory (El Condor, 2012). No details of sample security procedures were available or reviewed by the Competent Persons.
Audits or reviews • *The results of any audits or reviews of sampling techniques and data.*	• Any sample audits will have to be executed and reported by the PGeo(OGQ) on the Project, Mario Justino (OGQ) and E.Canova (OGQ) spotting all the holes and carrying out the Quick Logs of each hole. • The 2009 Technical Report and Mineral Resource Estimation was signed off by Luc Harnois, Ph.D., and P.Geo., (OGQ, APGO) who also reviewed the 2008 drilling program while underway. His review included: • Core logging and sampling of 21 diamond drill holes totalling 5.2 km. • Locating several drill holes on the grid. • The azimuth and dip of these drill holes were verified (Kelso et al., 2009). • The Competent Person has not independently verified this historical information.

PIVOTAL METALS

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

JORC Code explanation	Commentary
Mineral tenement and land tenure status • ***Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.*** • ***The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.***	• The Horden Lake Cu-Ni-Au-PGM-Co Project is located approximately 131 km north-northwest of the town of Matagami in the NTS sheet 32K13, James Bay District (Eeyou Istchee James Bay Regional Gouvernment), Quebec. It is located approximately 9.6 km west and 11.6 km west on a winter road from the kilometre 197 on Route 109 (Billy Diamond James Bay Highway), an all-weather road connecting Matagami to the Hydro-Québec James Bay power complex at Radisson, Quebec. The approximate location of the Horden Lake Deposit (the "Deposit") is UTM 303367mE, 5646592mN, Elevation 259.5m ASL map 32K13 datum NAD83 Zone 18 North, equivalent to 50.9374°N latitude and 77.7988°W longitude. • The boundaries of the Property have not been legally determined by surveying. Claim outlines are obtained from GESTIM website, the online title management system of the Ministry of Energy and Natural Resources of Quebec. • The Project consists of 18 mining claims (CDCs) in two non-contiguous groups, totalling 814.81 ha as of April 26, 2024. • The Project is 100 owned by 9426-9198 Quebec Inc, a wholly owned Quebec registered subsidiary of Pivotal Metals Ltd ("Pivotal"). Pivotal does not own the surface rights over the mining claims, these rights remain with the Crown. • Based on the current fee schedule, the government fee for renewing the 18 mining claims through the standard 2 year term total C$1,273, and for the work requirement through the 2 year term is C$34,500. There is currently enough credit in "Excess Work" (C$4,606,029.94) that can be applied (distributed) amongst the current mining claims, circumventing the immediate need for the filing of additional exploration expenditures. • The 18 mining claims are subject to two (2) separate Net Smelter Return Royalties ("NSR"), defined as a production royalty, each of which is payable at a rate of 1.0% (2% total) from material derived from the Property during production. • There are no issues with native title issues, historical sites, wilderness or national parks and environmental settings. • Permits are required to conduct exploration programs that will disturb the surface (e.g., surface trenching, diamond drilling) and, typically, for any associated environment-altering work (e.g., watercourse diversion, water crossings, clear-cutting). 9426-9198 Quebec Inc/Pivotal must file the permit applications for these activities with the appropriate government departments in a timely fashion, allowing a minimum of 4 weeks, but ideally 6 to 8 weeks, for the processing period, inclusive of any required First Nation consultation. • In Quebec, forest management permits are required before trees can be cut when building access roads and drill sites. These permits are issued by the Ministry of Forests, Wildlife and Parks ("MFFP"). The time frame in obtaining this type of permit is usually 4 to 8 weeks.

Exploration done by other parties • ***Acknowledgment and appraisal of exploration by other parties.***	• Exploration to date has been completed by other parties including INCO and Caracle Creek International Consulting Inc. on behalf of Southampton ventures and El Condor Minerals (Kelso et al., 2009; El Condor, 2012). The Competent Person has reviewed reports and files pertaining to the 1960s, 2008 and 2012 exploration work and drilling campaigns but has not independently verified the contained information.
Geology • ***Deposit type, geological setting and style of mineralisation.***	• Magmatic Cu-Ni-PGE (platinum-group element) sulphide mineralization within the Frotet-Evans Greenstone Belt in the Opatica Subprovince. Dominant rock types are metavolcanic and metasedimentary rocks. Metagabbro occurs as a long and narrow, concordant body and with inclusions of metasedimentary rocks. Granites intrude the metasedimentary and metavolcanic package and are cut by granitic dikes and pegmatites. The youngest rocks in the area are gabbro and diabase dikes. • Host of the mineralization is variable between the gabbroic rocks and the footwall metasedimentary rocks, with up to 5% disseminated to massive pyrrhotite, pentlandite, pyrite and chalcopyrite, and blebby sulphides also occur in shear zones within the gabbro, along the contact and within the metasediments (Kelso et al., 2009; El Condor, 2012). Local sphalerite and galena occur in altered gabbro and metasediments (Kelso et al., 2009).

Drill hole Information
• ***A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:***
  ○ ***easting and northing of the drill hole collar***
  ○ ***elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar***
  ○ ***dip and azimuth of the hole***
  ○ ***down hole length and interception depth***
  ○ ***hole length.***
• ***If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.***
	• Refer to Table 1 for drill collar information relevant to this ASX announcement. Mineralisation is described in the body of the announcement.
	• For details of the historical holes referenced in this release, refer to ASX announcement dated 16 November, 2022 “Outstanding Horden Lake 27.8Mt JORC estimate”

Data aggregation methods
• ***In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g., cutting of high grades) and cut-off grades are usually Material and should be stated.***
• ***Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.***
	• Reporting of the metal concentrations in drill hole intercepts is done through the weighted averaging of the assays over the given sample intervals.
	• Selection of potential mineralized intervals for drilling (prior to any resource update) are outlined by running a grade cut-off of using the same formula as used in the 2022 Technical Report (below).
	• CuEq = Cu(%) + Ni(%)*2.59 + Au(ppm)*0.63 + Pd(ppm)*0.74.
	Assumed recovery / US$ prices:
	  ○ Cu 90% / $7,300/t Cu
	  ○ Ni 80% / $21,300/t Cu
	  ○ Au 80% / $1,600/ oz Au
	  ○ Pd 80% / 1,900/oz Pd

• ***The assumptions used for any reporting of metal equivalent values should be clearly stated.***	• CuEq excludes any Pt, Co or Ag credit. • Criteria are minimum mineralised zones of 1.5m, minimum zone spacings of 3m and maximum waste of 5 m. CuEq 0.3% (lower) and 1.1% (upper) are indicative of the open pit and underground cut-offs used in the calculation of the 2022 Mineral Resource Estimate.
Relationship between mineralisation widths and intercept lengths • ***These relationships are particularly important in the reporting of Exploration Results.*** • ***If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.*** • ***If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g., 'down hole length, true width not known').***	• True widths of the mineralized intercepts are estimated to be 70-100%, but not certain and as such are reported as drill hole core lengths.
Diagrams • ***Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.***	• Refer to the body of this ASX Announcement for plans, sections and tabulations of the exploration results being disclosed.
Balanced reporting • ***Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.***	• All results above 0.3% CuEq cut-off have been tabulated in this announcement. The results are considered representative with no intended bias
Other substantive exploration data • ***Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.***	• In 2023 and 2024, optical mineralogical examination of 25 samples of rock units (gabbros and metasediments) and 28 polished mineralized samples (heavy net-textured, semi-massive, to massive sulfides) were performed by Vancouver Petrographics on the historical holes HN-08-05, 26, 27, 29, 30, 37, 38, 71, 73 and 74. Host rocks, as determined from the thin sections, may be roughly grouped into mafic intrusives (mostly gabbro, 7 samples; minor ultramafic, 2 samples, mafic dyke, 2 samples, pegmatite, 1 sample) and meta-sedimentary/minor meta-volcanic rocks (schist/gneiss, 5 samples, meta-psammite, 2 samples, meta-pelite and possible meta-conglomerate, 1 sample each; mafic volcanic, 3 samples; felsic volcanic, 1 sample, as follows (with few exceptions, most of the included fragments in the massive sulfides analysed in the polished thin sections can be similarly ascribed to mainly metasediment and lesser meta-gabbro host rocks, but with less confidence due to their mainly strongly altered and deformed nature). Gabbros will be richer in Amphiboles 50% and Plagioclase 40%, Melanogabbros and Leuco gabbros will be richer in Feldspars with 55-70%Plagioclase, and 30-35%Amphiboles. Metasediments will have the presence of cordierite, sillimanite, quartz, plagioclase, biotite, sericite and carbonate and occasionally some serpentine. Sulphide mineralization is massive and semi-massive with massive pyrrhotite ±chalcopyrite-pyrite containing rounded magnetite-quartz-tremolite?-biotite inclusions,

	in fine grained Mg chlorite-quartz ±amphibole-biotite, carbonate -epidote altered rock containing vein-like chalcopyrite-pyrrhotite-pyrite ±ilmenite-sphalerite. May also observe massive pyrrhotite-chalcopyrite-minor ilmenite/sphene ±sphalerite, with gangues of amphibole-biotite-local plagioclase and quartz, variably altered to chlorite-epidote-sericite, suggestive of former meta-mafic volcanic and meta-sediment. Semi-massive sulfides (pyrrhotite-minor pyrite-chalcopyrite-significant intergranular pentlandite) in a weakly foliated/crenulated matrix of mafic gangues (amphibole-biotite both commonly replaced by Mg-chlorite; minor quartz and virtually fresh, unaltered plagioclase) suggestive of gabbro possibly contaminated by meta-psammite. Also semi-massive sulfides (mainly pyrrhotite-minor chalcopyrite-trace pentlandite-sphalerite) with wall-rock lenses of foliated quartz-chlorite-sericite-relict biotite-minor local carbonate-trace ilmenite suggestive of meta-psammite (?). Polished section examination notes coarse pyrrhotite grains with chalcopyrite and pyrite being medium grained and pentlandite on the margins of the pyrrhotite and within the pyrrhotite grains. • Historical exploration in the area included airborne magnetic/EM survey (Noranda Mines 1957/58) and regional airborne geophysical surveys, and 32,229 m of diamond drilling (157 holes) culminating in an historical resource estimate of 6,088,900 t @ 1.24 % Cu, 0.33 % Ni, 18.40 g/t Ag (INCO 1963-69) (Kelso et al., 2009) on three properties including Horden Lake. A Pre-Feasibility Study in 1993 identified an historical resource of 1,238,333 t @ 1.91% Cu 0.40% Ni. (Kingswood Resources Inc.) (WGM, 1993; Kelso et al., 2009). • These historical resources have not been reviewed by a Competent person and cannot be considered compliant under JORC guidelines. • In the early 1970s, INCO performed preliminary flotation testing on five drill core samples from the Horden Lake Deposit. The tests showed recoveries from 85% to 96% Cu with concentrates of Ni, Cu, Ag and traces of Au and platinum-group elements (PGE), demonstrating the presence of significant cobalt from the composite sampling. Copper grades in the concentrate range from 21.5% to 30.4% Cu (WGM, 1993; Kelso et al., 2009; Thompson, 1981). • A Fugro DIGHEM EM-Mag survey was completed in the area 2005 by Pacific North West Capital Corp., consisting of 445.5 line-km and identifying multiple EM conductors in the region. • A Fugro HeliGEOTEM® was flown in 2008 (Southampton Ventures): three profile lines over the Horden Lake Deposit and 131 and 35 lines over the exploration areas to the NE and SW exploration blocks respectively. The mineralized zone at Horden Lake showed a clear association with magnetic and conductive responses (Kelso et al., 2009). Six targets were selected from the northeast block and may represent a grouping of several conductive targets. It was difficult to select isolated magnetic/conductive targets because magnetic features in this block had strong conductive association. One target was selected (Kelso et al., 2009).The geophysical work has not been directly reviewed by the Competent Person.
Further work • ***The nature and scale of planned further work (e.g., tests for lateral extensions or depth extensions or large-scale step-out drilling).*** • ***Diagrams clearly highlighting the areas of possible***	• Pending the completed results of the 2024 drilling and geophysics program, additional drilling to test open extensions of the mineralisation. • In-fill drilling to improve the confidence and upgrade the categorization of the resources from Inferred to Indicated and eventually Indicated to Measured for future higher level economic studies.

extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	• Metallurgical testwork on fresh core representative of the style of mineralization found to date in the Deposit. • Mineralogical investigations to better characterize target sulphide mineralization (pyrrhotite, pentlandite, chalcopyrite and pyrite) and secondary sulphides such as galena and sphalerite. • In order to gain a better understanding of the structures within the Deposit and the host rocks and their bearing on the distribution and grade of mineralization, a selected number of oriented drill cores should be considered as part of the geotechnical drilling program. • Additional specific gravity measurements should be made by an accredited laboratory in order to develop a robust density library for various lithology types and styles of mineralisation Presently being done by ALS Global Laboratory. • As much as possible, previous drill core logs (1960s, 2008, 2012 and 2013) should be reviewed prior to beginning a new drilling program and a new set of standardized lithological, alteration, mineralisation and structural codes be determined. Presently included in the database and included. • Information and data from the hard copy drill core logs from the 1960s INCO drilling should be digitally captured, reviewed and incorporated into any future modelling and mineral resource estimation. • Initiation of an Environmental Baseline Study to be expanded upon as the Project moves toward higher levels of economic evaluations. • Completion of an airborne LIDAR (Light Detection And Ranging) survey in order to utilize an accurate Digital Elevation Model (DEM) in future exploration work, technical studies, and future mine planning. • Re-examination of the portion of historical drill core which has been consolidated in Val d'Or by Pivotal in 2023. • Once the appropriate amount of new diamond drilling has been completed, an updated mineral resource estimate should be generated in order to move the Project forward into a Scoping Study or Pre-Feasibility Study.