

New High-Grade Gold Results at Guyer Target Area



Iceni Gold Limited (ASX: ICL) (**Iceni** or the **Company**) is pleased to provide an **exploration update** on the Guyer Well Target Area.

Highlights

• High-grade rock chip assays have been returned from the Guyer target area with assays including:

136g/t Au 126g/t Au 67.4g/t Au 18.3g/t Au 15.5g/t Au.

- Gold bearing rock chips support existing targeting work.
- Ongoing fieldwork has discovered over **700 gold nuggets** along the **Guyer Trend** to date.
- More than **100 gold nuggets** have been recovered during the last 4 weeks.
- Results from Guyer South AC drilling have identified bedrock gold anomalism beneath transported cover.
- Exploration work has located historic workings associated with the **11km long granite contact** and the **7km long banded iron formation (BIF) Trend** at Guyer.
- Mineralisation associated with granite contacts or BIF trends occur at major regional mines such as **King of the Hills**, **Mt Morgans**, **Granny Smith** and **Sunrise Dam**.
- Elevated tellurium (Te) in **Guyer** rock chip results is similar to nearby gold deposits known to have tellurides, like the **Sunrise Dam**, **Wallaby** and **Jupiter** gold deposits.
- The Guyer North target is presently being prepared for the commencement of exploration drilling.

Technical Director David Nixon commented:

"New high-grade gold results have been discovered within the **Guyer target** area, providing strong evidence of deeper buried mineralisation being revealed at surface by the Company's ongoing exploration work.

The high-grade rock chip results from in-situ outcrop are exciting because they confirm and support the existing gold UFF+ soil anomalies.

The Guyer South AC drilling results also demonstrate that gold anomalism is concealed beneath deep transported cover.

The Guyer target area continues to deliver in-situ gold bearing rock chips and significant numbers of gold nuggets over key areas, and these results continue to strengthen the previous results from broad spaced Air Core holes, specifically at Guyer North, where a number of significant targets are being prepared for future exploration drilling".

Registered Address

Iceni Gold Limited Level 2 41-43 Ord Street West Perth WA 6005

ASX: ICL ACN: 639 626 949 t: +61 6458 4200 e: admin@icenigold.com.au w: icenigold.com.au

Corporate

Brian Rodan Executive Chairman David Nixon Technical Director Keith Murray Non-Executive Director Hayley McNamara Non-Executive Director Sebastian Andre Company Secretary Project 14 Mile Well Guyer Well Capital Structure Shares: 208,571,428 Options: 19,706,857



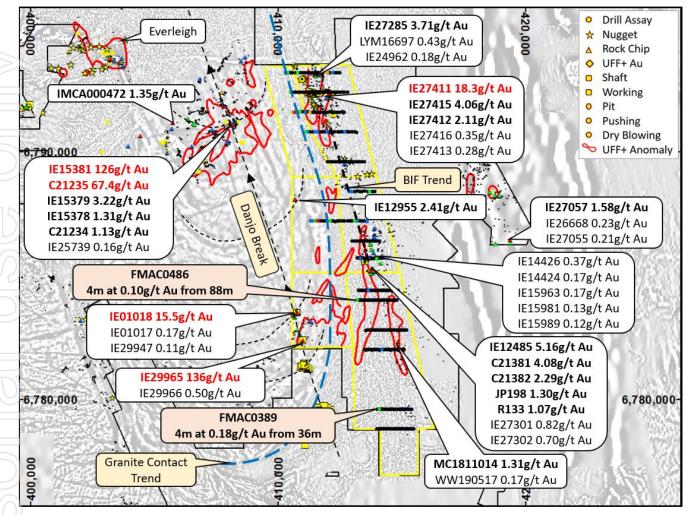


Figure 1 Gold rock chip assays across the Guyer Well target area and the Guyer South AC results.

Ongoing rock chip sampling across the Guyer target area has delivered several significant gold results, that include several **high-grade gold results** at Granite Contact South, **Guyer North** and East Well. The gold anomalism is supported by multi-element geochemistry, which reinforces the anomalies.

The majority of gold anomalous samples are hosted by quartz veining in granite, andesite or sediments, sometimes displaying evidence of sulphides or boxworks after sulphides.

Peak gold values from rock chip sampling include the following results:

	Table 1 Summary of High-Grade Rock Chip Results from Guyer
Sample #	Significant Results
IE29965	136g/t Au , 3.03g/t Ag, 0.15g/t Te
IE15381	126g/t Au , 3.73g/t Ag, 0.49 g/t Te
C21235	67.4g/t Au , 7.38g/t Ag
IE27411	18.3g/t Au , 1.14g/t Ag, 2.16g/t Te
IE01018	15.5g/t Au , 2.34g/t Ag, 20.7g/t Te
	IE29965 IE15381 C21235 IE27411



Guyer North

Rock chip samples from the **Guyer North** prospect returned significant gold results that support the existing gold anomalies. Gold mineralisation was associated with quartz veining in andesite on the eastern side of the ridge at Guyer North. A number of these samples had anomalously high silver values when compared to gold. This geochemical relationship could be indicative of an earlier epizonal style of mineralisation.

Key results include:

		Table 2 Summary of Key Results from Guyer North
5	Sample	Significant Results
J	IE27411	18.3g/t Au , 1.14g/t Ag, 2.16g/t Te
	IE27415	4.06g/t Au , 9.69g/t Ag, 4.91g/t Te.
2	IE27412	2.11g/t Au , 10.25g/t Ag, 4.12g/t Te.
11		

Elevated tellurium (Te) in the Guyer North rock chip results is similar to nearby gold deposits known to carry tellurides in their ores, for example the **Sunrise Dam**, **Wallaby** and **Jupiter** Gold Deposits.

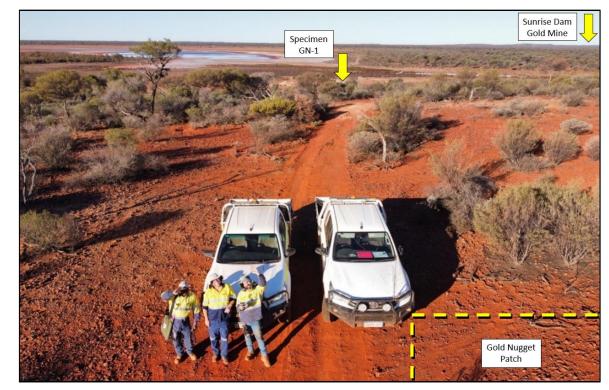


Figure 2 Site of specimen GN-1 on the east flank of the ridge at Guyer North, looking east.

Crushing and panning of samples from a strongly altered breccia outcrop on the eastern side of the ridge at Guyer North revealed microscopic gold. Specimens were analysed by Portable Spectral Services in their Perth laboratory using a Bruker M4 Tornado micro-XRF instrument. The samples were analysed using a 30µm XRF scan to determine their elemental make up and mineralogical composition.

The micro-XRF scans of a number of samples identified **ultra fine-grained gold**. The analysis confirmed the presence of gold within the altered breccia outcrop at Guyer North. Similarly, the **Sunrise Dam** gold deposit on the opposite shore of Lake Carey is also known to have microscopic gold as a component of its ores (Sung and Choi, 2010).



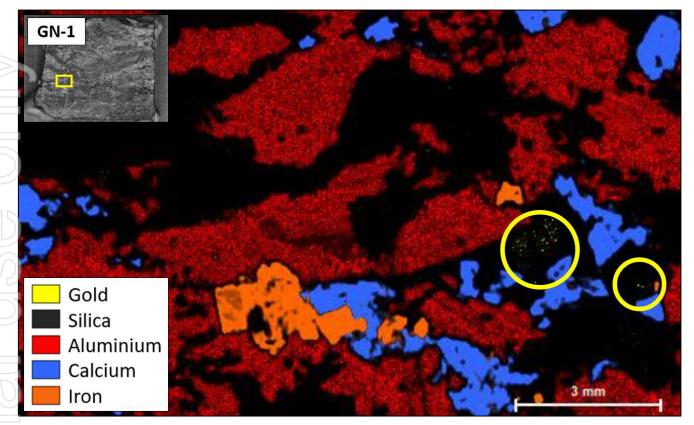


Figure 3 Micro-XRF element map of sample GN-1. Clusters of microscopic gold particles have been circled*.

Prospecting activity from contracted and Company staff has recovered gold nuggets within the **Guyer North** and **Guyer Central** prospects. The presence of gold nuggets in the surface alluvium supports the UFF+, rock chip and drilling results within these prospects.



Figure 4 Selection of gold nuggets and specimen stone recently recovered from Guyer North*.

*Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.





Figure 5 Salt lake gold nuggets recovered from Guyer North with a gold fineness of ~97.5% (by pXRF)*.

A number of Salt Lake nuggets were recovered to the east of **Guyer Ridge**. The Salt Lake nuggets have been subjected to extreme chemical weathering and have been deeply etched. These nuggets are interpreted to indicate **a primary gold source** within the catchment draining area at **Guyer Ridge**.

During the previous 4 weeks over **100 nuggets** have been recovered, bringing the total to date to over **700 nuggets** found along the Guyer Trend. At Guyer North nuggets were found along the slopes of the ridge at Guyer North and a concentration of nuggets was recovered from the crest of the Guyer Ridge, associated with a shear zone and deformed quartz veins. The veins showed evidence of sulphides/boxworks after sulphides. The gold was angular and jagged, with some specimens still attached to quartz.

These nuggets are interpreted to be at their source on the crest of the ridge at Guyer North.

Guyer South

Ongoing mapping in the Guyer target area has located a number of old workings, shafts and scrapings. A number of these were located in the Granite Contact South prospect while others were found in the Guyer North and Guyer Central prospects. These features are used as prospectivity indicators that support the existing anomalous trends identified by surface sampling and drilling. Within the Guyer South prospect area 205 AC holes had been drilled for a total of 13,536m.

The results from the Guyer South AC drilling returned a number of significant intercepts. These results have identified anomalous gold hidden beneath transported cover related to a **palaeochannel system**.

Due to the broad line spacing of the AC drilling campaign any significant result requires follow up drill testing.

Table 3 Guyer South AC Drilling Significant Results									
Hole Northing Easting EOH Dip/Azi Intercept									
FMAC0389	6,779,598	414,108	53	-60/270	4m at 0.18g/t Au from 36m				
FMAC0486	6,784,008	413,200	94	-60/270	4m at 0.10g/t Au from 88m				

*Visual estimates of mineral abundance should never be considered a proxy or substitute for laboratory analyses where concentrations or grades are the factor of principal economic interest. Visual estimates also potentially provide no information regarding impurities or deleterious physical properties relevant to valuations.



About Iceni Gold

Iceni Gold Limited is a Perth based exploration company that operates the 14 Mile Well Gold Project in the Laverton Greenstone Belt. Iceni Gold Limited (Iceni or the Company) now has 8 key high priority target areas within the 14 Mile Well project area. Iceni is actively exploring the target areas using geophysics, metal detecting, surface sampling, Ultrafine (UFF+) soil sampling, air core (AC) drilling and diamond drilling (DD). The ~800km² 14 Mile Well tenement package, the majority of which has never been subject to modern systematic geological investigation, is situated on the western shores of Lake Carey, ~ 50km from Laverton WA.

Competent Person Statement

The information in this announcement that relates to exploration results fairly represents information and supporting documentation prepared by Mr David Nixon, a competent person who is a member of the Australasian Institute of Mining and Metallurgy. Mr Nixon has a minimum of twenty-five years' experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a competent person as defined in the 2012 Edition of the Joint Ore Reserves Committee Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Nixon is a related party of the Company, being the Technical Director, and holds securities in the Company. Mr Nixon has consented to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

For more information contact:

Brian Rodan Executive Chairman Iceni Gold Limited

admin@icenigold.com.au +61 6458 4200 **David Nixon** Technical Director Iceni Gold Limited

+61 6458 4200

JORC Code, 2012 Edition - Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	 Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	 Air Core Drilling (AC) AC is used to obtain drill chips which are sampled using a PVC sample spear, the sample spoil is sampled in nominal 4m lengths, the entire sample (nominal 2kg) is pulverised to produce a 30g charge for fire assay to analyse for Au. The EOH sample is sampled as a 1m sample using a PVC sample spear, the entire sample is pulverised to produce a 30g charge for fire assay to analyse for Au and 0.3g is used for multielement analysis, where it is treated by four acid mixed acid digest and measured using a mass spectrometer and optical emission spectrometer. Another subsequent analysis of the spectra is used to interpret mineralogy. Drill hole orientation is surveyed using compass and clinometer Air Core drilling contractor is Raglan Drilling Alteration and mineralisation have been identified by field geologists during routine sample inspection in the field and during logging of drill spoil. Rock Chip Sampling Rock Chip sampling is used to obtain a point sample of outcrop or float. Rock Chip sampling is used to obtain a point sample of outcrop or float. Rock Chip sampling is used to obtain a point sample of produce a 30g charge for fire assay to analyse for Au and 0.3g is used for multielement analysis, where it is treated by four acid mixed acid digest and measured using a mass spectrometer and optical emission spectrometer. Another subsample is pulverised to produce a 30g charge for fire assay to analyse for Au and 0.3g is used for multielement analysis, where it is treated by four acid mixed acid digest and measured using a mass spectrometer and optical emission spectrometer. Another subsample is utilised for Short Wave Infra-Red (SWIR) spectrometry and subsequent analysis of the spectra is used to interpret mineralogy. Sample locations are measured using handheld GPS Sample locations are measured using handheld GPS Sampling and logging in the field.

detectors, commonly using a gridded search pattern.

Criteria	JORC Code Explanation	Commentary
		 Metal detectors in use are Minelab SDC2300, GPX6000 and GPZ7000, these models can handle the mineralised soils common within the district. The detectors are being operated by suitably experienced personnel. Recovered targets are located using handheld GPS receivers. Targets are weighed using digital scales with an accuracy of 0.1g. Targets may be analysed using pXRF to identify gold-silver ratio and the presence of pathfinder elements. Portable X-Ray Fluorescence Analysis (pXRF)
		 pXRF analysis is conducted in the field on selected rock/mineral specimens using an Olympus Delta Handheld pXRF unit. The device measures a point <5mm in diameter on the surface of the rock/minera analysis.
		 pXRF results are considered useful for mineral identification, gold-silver ratio and guidance on the presence of pathfinder elements only. pXRF measurements are no a substitute for lab analyses.
		Micro X-Ray Fluorescence Analysis (µXRF)
		 µXRF is a laboratory method using a Bruker M4 Tornado Plus µXRF instrument. The device measures XRF spectra from pixels ~30µm across, these pixels are scanned in sequence to form larger images for interpretation. µXRF analysis provides qualitative and quantitative data on elemental distributions within a specimen, which in turn is used to generate mineralogical distributions.
Drilling techniques	• Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	 AC Air Core drilling using blade and a face sampling down hole hammer is used to penetrate hard formations. Samples are drill spoil/chips and as such are not oriented. The drill hole collar orientation is surveyed using a compass and clinometer.
Drill sample recovery	 Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	 AC Chip recoveries are estimated visually. Core recoveries are recorded by the field crew when sampling. Cyclone and buckets are cleaned at the end of each rod. Data does not indicate a relationship exists between recovery and grade or if bias has been introduced due to preferential loss/gain of fine/coarse material.
Logging	 Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant 	 AC Chip samples are logged at the rig site. The Reconnaissance AC method is not suitable to support Mineral Resource Estimations Samples are bagged at the rig site and transported from the rig site to a secure compound in Kalgoorlie. The entire length of the hole is logged (100% of relevant intersections are logged). Rock Chip

Criteria	JORC Code Explanation	Commentary
	intersections logged.	 Rock Chip samples are logged in the field at the sample site. Rock Chip grab sampling method is not suitable to support Mineral Resource Estimations Samples are bagged at the sample site and transported to a secure compound in Kalgoorlie.
Sub-sampling techniques and sample preparation	 If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality and appropriateness of the sample preparation technique. Quality control procedures adopted for all subsampling stages to maximise representativity of samples. Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	 AC Air Core spoil is sampled using a PVC sample spear, the sample spoil is sampled in nominal 4m lengths, the entire sample (nominal 2kg) is pulverised to produce a 30g charge for fire assay to analyse for Au. The EOH sample is sampled as a 1m sample using a PVC sample spear, the entire sample is pulverised to produce a 30g charge for fire assay to analyse for Au and 0.3g is used for multielement analysis, where it is treated by four acid mixed acid digest and measured using a mass spectrometer and optical emission spectrometry and subsequent analysis of the spectra is used to interpret mineralogy. Ex-Lab QA/QC procedures include insertion of standards, blanks and field duplicates. In-Lab QA/QC procedures include insertion of standards, blanks and duplicates, grind checks and repeat analyses are standard procedure. The 4m composite sampled. The remaining drill spoil is retained at the rig site so it can be used as a reference and for check sampling. Rock Chip Rock Chips are broken from outcrop or float using a steel Estwing geological hammer, the entire sample (nominal 0.5kg) is pulverised to produce a 30g charge for fire assay to analyse for Au and 0.3g is used for multielement analysis, where it is treated by four acid mixed acid digest and measured using a mass spectrometer and optical emission spectrometer. Another subsample is utilised for Short Wave Infra-Red (SWIR) spectrometry and subsequent analysis of the spectra is used to interpret mineralogy. Ex-Lab QA/QC procedures include insertion of standards, blanks and field duplicates. In-Lab QA/QC procedures include insertion of standards, blanks and duplicates, grind checks ample (nominal 0.5kg) is pulverised to produce a 30g charge for fire assay to analyse for Au and 0.3g is used for multielement analysis, where it is treated by four acid mixed acid digest and measured using a mass spectrometer and optical emission spectrometer. Another subsample is utilise

	Criteria	JORC Code Explanation	Comm	entary
			• µXRF	The on-board camera is used to accurately locate the device on the rock/mineral surface.
			•	In-Lab QA/QC procedures include insertion of standards, blanks, duplicates and repeat analyses are standard procedure. Specimens require minimal preparation; in this instance the sample has been cut
	Quality of	The nature, quality and appropriateness of the	AC	with a diamond saw to reveal the internal structure of the sample.
	assay data and laboratory tests	 The hattle, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	• • •	The lab procedures for sample preparation, fusion and analysis are considered industry standard. Ex-Lab QA/QC procedures include insertion of standards, blanks and field duplicates. In-Lab QA/QC procedures include insertion of standards, blanks and duplicates, grind checks and repeat analyses are standard procedure. The 4m composite sample size for Air Core is an acceptable industry standard and considered appropriate for the style of mineralisation being targeted and the grainsize of the rock being sampled. The remaining drill spoil is retained at the rig site so it can be used as a reference and for check sampling. QA/QC samples are behaving within acceptable thresholds. thips The lab procedures for sample preparation, fusion and analysis are considered industry standard. Ex-Lab QA/QC procedures include insertion of standards, blanks and field duplicates. In-Lab QA/QC procedures include insertion of standards, blanks and duplicates, grind checks and repeat analyses are standard procedure. The nominal 0.5kg sample size for a rock chip sample is an acceptable industry standard and considered appropriate for the style of mineralisation being targeted and the grainsize of the rock being sampled. QA/QC samples are behaving within acceptable thresholds.
))			• µXRF	As such pXRF results are considered to be indicative and used for guidance only.
			•	µXRF analysis is conducted by Portable XRF Services Pty Ltd (trading as Portable Spectral Services) in their Perth laboratory.
			•	μ XRF is a laboratory method using a Bruker M4 Tornado Plus μ XRF instrument.
			•	The device measures XRF spectra from pixels ~30µm across, these pixels are scanned in sequence to form larger images for interpretation.
			•	μ XRF analysis provides qualitative and quantitative data on elemental distributions within a specimen, which in turn is used to generate mineralogical distributions.

	Criteria	JORC Code Explanation	Commentary
	Verification of sampling and assaying	 The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	 AC Significant intersections are verified by field staff then validated by the Senior Geologist or Exploration Manager. Bottom of hole chips and reference drill spoil is physically inspected to validate significant intersections and logging. Logging data is entered digitally, using standard software with dropdown lists, it is sent to database administrators for incorporation in the digital database Assay data is not adjusted. Rock Chips Significant results are verified by field staff then validated by the Senior Geologist or Exploration Manager. Broken outcrop is physically inspected to validate significant results and logging. Logging data is entered digitally, using standard software with dropdown lists, it is sent to database administrators for incorporation in the digital database Prospecting Recovered targets are verified by the Senior Geologist or Exploration Manager. The recovery sites are physically inspected to validate the location of the recoveries and to put the finds into geological context.
	Location of data points	 Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	 In the field data points are located using Garmin GPSMAP64csx[™] handsets with a nominal accuracy is 3m. No mineral resource estimations form part of this announcement. Grid system is GDA94 zone 51 The project has a nominal RL of 440m, a more accurate DTM, provided by geophysical contractors, is used for topographic control.
	Data spacing and distribution	 Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	 AC Sampling is conducted in nominal 4m intervals. All Air Core is sampled. The data spacing and distribution is sufficient to establish the degree of geological and grade continuity but it is not appropriate for Mineral Resource and Ore Reserve estimations. Nominal 4m sample composites, with 1m sample at EOH. Rock Chips Rock Chip samples are point samples and are not appropriate for Mineral Propriate for Mineral Resource and Propriate for Mineral Resource for Mineral Resource and Ore Reserve estimations.
)	Orientation of data in relation to	• Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	 Resource and Ore Reserve estimations. AC The orientation of sampling is considered appropriate with respect to the structures being tested.

Criteria	JORC Code Explanation	Commentary
geological structure	• If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this	Bias introduced by drilling orientation is insignificant due to the depth of cover and lower penetration of residual bedrock.
	should be assessed and reported if material.	Rock Chips
		Rock Chip samples are biased to the geometry of the available outcrop.
Sample security	The measures taken to ensure sample security.	 AC & Rock Chips Samples within calico bags are stored in sealed polyweave bags within a larger Bulka bag, the Bulka bags are secured on pallets for transport Pallets of samples are transported by truck to the yard in Kalgoorlie The yard in Kalgoorlie is enclosed within a secured and locked compound with a monitored security system that includes internal and external video recording.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	 AC & Rock Chips The sampling methods being used are industry standard practice. QAQC Standard samples are OREAS Super CRMs[®] for Au and Multi-elements. Samples are submitted to ALS Laboratory in Perth for sample preparation and analysis, this lab is ISO/IEC 17025:2017 and ISO 9001:2015 accredited. The lab is subject to routine and random inspections.
	eporting of Exploration Results n the preceding section also apply to this section.)	

	Criteria	J	ORC Code Explanation	Commentary						
Ī	Mineral	٠		All exploration is located within Western Australia.						
1	tenement and land tenure		ownership including agreements or material issues with third parties such as joint ventures,			Act	tivity: Teneme	nt Summa	ry	
Ó	status		partnerships, overriding royalties, native title interests, historical sites, wilderness or national		Prospect	Tenement	Grant Date	Status	Owner	
		•	park and environmental settings. The security of the tenure held at the time of		Guyer	E39/1999	4/7/2018	Live	Guyer Well Gold Pty Ltd	
			reporting along with any known impediments to obtaining a licence to operate in the area.		14 Mile Well	Gold Pty Ltd & G	Guyer Well Gold of Iceni Gold		e wholly owned subsidiaries	
	Exploration done by other parties	•	Acknowledgment and appraisal of exploration by other parties.	•	 The Fourteen Mile Well project area has previously been held but under-explored for Au. The area being tested by the exploration campaign has been inadequately drill tested by previous explorers. Historical exploration work has been completed by numerous individuals and organisations. The reports and results are available in the public domain and all relevant WAMEX reports etc. are cited in the Independent Geologists Report dated March 2021 which is included in the Prospectus dated 3 March 2021. 					
)	Geology	•	Deposit type, geological setting and style of mineralisation.	•	Exploration is	targeting Orogen	ic Gold and Int	rusion Rela	ited Gold deposit styles.	

Criteria	JORC Code Explanation	Comme	entary			
					Summary of Pro	spects
			Prospect	Host	Deposit Style	Associations
			Curver	Andesite – BIF - Monzogranite	Orogenic	Quartz veining, alteration, sulphides
			Guyer	Monzogranite - Syenite	Intrusion Related	Quartz veining, alteration, sulphides
Drillhole Informatic	 A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: easting and northing of the drillhole collar elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar dip and azimuth of the hole down hole length and interception depth hole length. If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	•	AC drilling and	d Rock Chip inforr	nation and results	are included in the attached Data
Data aggregativ methods	In reporting Exploration Results, weighting	Rock Cl	Anomalous/R Maximum/min Intercepts ma Higher grade Metal equivale hips Rock chips ar Anomalous/R Maximum/min Rock chips ar	eporting threshold imum grade trunc y include 2m lengt	: 0.10g/t Au cations are not use ths of internal dilu ed separately if the reported. nd are not averag : 0.10g/t Au cations are not use nd do not contain	tion ey exceed > 3x the interval grade red

Criteria	JORC Code Explanation	Commentary							
Relationship between mineralisation widths and intercept lengths	 These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known'). 	 AC Assay intercepts are downhole length, true width not known. Rock Chips Rock chips are point samples, relationships with mineralised widths are not known. 							
Diagrams	 Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views. 	Au an	Au anomalous drilling results relative to rock chip results.						
		Hole	Northing	Easting	EOH	Dip/Azi	Intercept		
		FMAC0389	6779598	414108	53	-60/270	4m at 0.18g/t Au from 36m		
		FMAC0486	6784008	413200	94	-60/270	4m at 0.10g/t Au from 88m		
)									
)									
Balanced reporting	 Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	AC drilling and Rock Chip information and results are provided in the attached Data Appendix							

Criteria	JORC Code Explanation	Commentary
Other substantive exploration data	 Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	 Geological interpretation and review included in prospectus dated 3 Mar 2021. 3km long gold target at Guyer in announcement dated 5 Nov 2021. Exploration at Guyer included in announcement dated 1 Dec 2021. Guyer Well target area drilling commences in announcement dated 25 Feb 2022. Exploration at Guyer included in announcement dated 28 Feb 2022. Exploration at Guyer included in announcement dated 4 May 2022. UFF anomaly at Guyer included in announcement date 6 July 2022. Included in Noosa Mining Conference presentation dated 20 July 2022. Significant gold intersection at Everleigh Well in announcement dated 5 Oct 2022. Recent nugget finds at North Guyer in presentation dated 21 Nov 2022. Included in AGM presentation in announcement dated 25 Nov 2022. 2.5km AC Gold anomaly at Guyer North in announcement dated 30 Nov 2022. Included in Exploration Update presentation dated 28 Dec 2022. Cold nugget anomaly extends to 5kms in announcement dated 9 Mar 2023.
		 High-grade rock chip assay results have returned within the Guyer target area, peak assay values include: 136g/t Au, 126g/t Au, 67.4g/t Au, 18.3g/t Au and 15.5g/t Au. Gold bearing rock chips and further gold nuggets have been recovered within the Guyer North prospect supporting the existing UFF, rock chip and AC drilling anomalies. A selection of the gold nuggets were analysed by pXRF and found to have a gold fineness of ~97.5% Au. A strongly altered outcrop was located east of the Guyer North ridge, samples were crushed and panned and ultra fine gold was observed. Samples from the altered outcrop were sent for µXRF laboratory analysis by Portable Spectral Services, gold was identified in a number of samples. This result confirms gold is present within outcrop at that location. The Guyer North prospect is ready for follow-up drilling. Ongoing mapping and prospecting activities have located a number of shafts and workings that support the Granite Contact and BIF trends within the Guyer target area.
		 Reconnaissance AC drilling on 400m to 2,400m spaced lines was recently completed at Guyer South. Assay results have been received for the AC drilling in the Guyer South prospect area. Results in AC drilling have identified a number locations where gold anomalism has been identified beneath the transported cover. Due to the broad spacing of the drilling significant results from this program are recommended for follow-up drilling. Ongoing fieldwork focused in key target areas is delivering gold targets that are drill ready.

Criteria	JORC Code Explanation	Commentar	Commentary								
			Table of Visual Exploration Results								
		Location	Minerals	Nature of Occurrence	Abundance	Assay Timing					
		Guyer North	Gold	Nuggets in surface alluvium	+100 nuggets on 4km trend Au fineness of ~97.5% (pXRF)	Not to be assayed					
Further work	The nature and scale of planned further wo	shou assa repo avai	 In relation to the disclosure of visual exploration results, the visual identification, estimates of mineral abundance or should never be considered a proxy or substitute for labo assay results are required to determine the size and grade reported. The company will update the market when laborate available. 								
	tests for lateral extensions or depth extensi large-scale step-out drilling).		lyse results ign follow ເ	p exploration program.							
	 Diagrams clearly highlighting the areas of p extensions, including the main geological interpretations and future drilling areas, pro this information is not commercially sensitive 	vided									

AC Drilling Significant Results Hole ID Easting Northing EOH m Au Assay Results **EOH Ag Assay Results** FMAC0387 414018 6779589 89 No Significant Assay No Significant Assay FMAC0388 414049 6779598 94 No Significant Assay No Significant Assay FMAC0389 414108 6779598 53 4m at 0.18g/t Au from 36-40m 1m at 0.16g/t Ag from 52-53m FMAC0390 414152 6779599 67 No Significant Assay No Significant Assay FMAC0391 414201 6779601 47 No Significant Assay No Significant Assay FMAC0392 414247 6779596 42 No Significant Assay No Significant Assay FMAC0393 414348 6779598 124 No Significant Assay 1m at 0.11g/t Ag from 118-119m FMAC0394 414403 6779590 109 No Significant Assay No Significant Assay FMAC0395 414455 6779599 102 No Significant Assay No Significant Assay FMAC0396 414848 6779596 80 No Significant Assay 1m at 0.13g/t Ag from 79-80m FMAC0397 414903 6779601 70 1m at 0.10g/t Ag from 69-70m No Significant Assay FMAC0398 414952 6779604 69 No Significant Assay No Significant Assay FMAC0399 415001 6779605 74 No Significant Assay No Significant Assay FMAC0400 415048 6779598 40 1m at 0.41g/t Ag from 39-40m No Significant Assay FMAC0401 415052 6779599 72 No Significant Assay 1m at 0.19g/t Ag from 71-72m FMAC0402 415062 6779599 92 No Significant Assay 1m at 0.54g/t Ag from 91-92m FMAC0403 415099 6779603 72 No Significant Assay No Significant Assay FMAC0404 415149 6779602 54 No Significant Assay No Significant Assay FMAC0405 415195 6779604 49 No Significant Assay No Significant Assay FMAC0406 414001 6778806 75 No Significant Assay No Significant Assay FMAC0407 414050 6778797 61 No Significant Assay No Significant Assay FMAC0408 414101 6778801 67 No Significant Assay No Significant Assay FMAC0409 414190 105 6778808 No Significant Assay No Significant Assay FMAC0410 414202 6778798 38 No Significant Assay No Significant Assay FMAC0411 414148 6778796 24 No Significant Assay No Significant Assay FMAC0412 414156 6778797 95 No Significant Assay No Significant Assay FMAC0413 414248 6778803 91 No Significant Assay No Significant Assay FMAC0414 414301 6778801 90 No Significant Assay No Significant Assay FMAC0415 414346 6778803 83 No Significant Assay No Significant Assay FMAC0416 414400 6778803 71 No Significant Assay No Significant Assay FMAC0417 414451 6778800 79 No Significant Assay No Significant Assay FMAC0418 414503 6778802 96 No Significant Assay 1m at 0.12g/t Ag from 95-96m FMAC0419 414551 6778800 101 No Significant Assay No Significant Assay FMAC0420 414602 6778801 111 No Significant Assay 1m at 0.20g/t Ag from 110-111m FMAC0421 414655 6778802 105 No Significant Assay 1m at 0.10g/t Ag from 104-105m FMAC0422 414701 6778799 82 No Significant Assay 1m at 0.14g/t Ag from 81-82m FMAC0423 414753 6778805 97 No Significant Assay 1m at 0.10g/t Ag from 96-97m FMAC0424 414802 6778802 96 No Significant Assay No Significant Assay FMAC0425 414854 6778799 93 No Significant Assay No Significant Assay FMAC0426 414906 6778805 81 No Significant Assay No Significant Assay FMAC0427 414953 6778800 82 No Significant Assay No Significant Assay FMAC0428 415003 6778803 81 No Significant Assay No Significant Assay FMAC0429 415046 6778801 84 No Significant Assay No Significant Assay FMAC0430 415104 6778801 84 No Significant Assay No Significant Assay FMAC0431 415151 6778800 94 No Significant Assay No Significant Assay FMAC0432 415205 6778803 90 No Significant Assay No Significant Assay

DATA APPENDIX - AC Significant Results and Rock Chip Geochemistry Results

FMAC0433

FMAC0434

415250

415299

6778803

6778802

87

87

No Significant Assay

No Significant Assay

No Significant Assay

No Significant Assay

FMAC0435	415356	6778802	87	No Significant Assay	No Significant Assay
FMAC0435	415403	6778800	90	No Significant Assay	No Significant Assay
110120430	413403	0770000	50	AC Drilling Significant Results	No Significant Assay
Hole ID	Easting	Northing	EOH m	Au Assay Results	EOH Ag Assay Results
FMAC0437	415449	6778801	57	No Significant Assay	No Significant Assay
FMAC0438	415499	6778801	54	No Significant Assay	No Significant Assay
FMAC0439	414549	6779603	58	No Significant Assay	No Significant Assay
FMAC0440	414604	6779595	59	No Significant Assay	No Significant Assay
FMAC0441	414302	6779601	80	No Significant Assay	No Significant Assay
FMAC0442	414501	6779603	75	No Significant Assay	No Significant Assay
FMAC0443	414549	6779603	90	No Significant Assay	No Significant Assay
FMAC0444	414604	6779595	84	No Significant Assay	No Significant Assay
FMAC0445	414654	6779607	49	No Significant Assay	1m at 0.26g/t Ag from 48-49m
FMAC0446	414705	6779603	86	No Significant Assay	No Significant Assay
FMAC0447	414753	6779597	80	No Significant Assay	No Significant Assay
FMAC0448	414799	6779596	87	No Significant Assay	No Significant Assay
FMAC0449	415255	6779605	26	No Significant Assay	No Significant Assay
FMAC0450	415304	6779606	34	No Significant Assay	No Significant Assay
FMAC0451	415353	6779600	19	No Significant Assay	No Significant Assay
FMAC0452	415405	6779599	31	No Significant Assay	No Significant Assay
FMAC0453	413604	6782801	82	No Significant Assay	No Significant Assay
FMAC0454	413653	6782795	90	No Significant Assay	No Significant Assay
FMAC0455	413704	6782801	78	No Significant Assay	No Significant Assay
FMAC0456	413755	6782793	84	No Significant Assay	No Significant Assay
FMAC0457	413802	6782796	86	No Significant Assay	No Significant Assay
FMAC0458	413856	6782796	96	No Significant Assay	1m at 0.13g/t Ag from 95-96m
FMAC0459	413906	6782801	76	No Significant Assay	No Significant Assay
FMAC0460	413955	6782802	68	No Significant Assay	No Significant Assay
FMAC0461	414007	6782802	54	No Significant Assay	No Significant Assay
FMAC0462	414052	6782792	62	No Significant Assay	No Significant Assay
FMAC0463	414105	6782801	58	No Significant Assay	1m at 0.12g/t Ag from 57-58m
FMAC0464	414153	6782797	81	No Significant Assay	No Significant Assay
FMAC0465	414202	6782797	87	No Significant Assay	1m at 0.11g/t Ag from 86-87m
FMAC0466	414251	6782800	77	No Significant Assay	No Significant Assay
FMAC0467	414306	6782801	69	No Significant Assay	No Significant Assay
FMAC0468	414352	6782800	90	No Significant Assay	No Significant Assay
FMAC0469	414406	6782804	58	No Significant Assay	No Significant Assay
FMAC0470	414455	6782804	78	No Significant Assay	No Significant Assay
FMAC0471	414505	6782805	70	No Significant Assay	No Significant Assay
FMAC0472	414549	6782802	82	No Significant Assay	No Significant Assay
FMAC0473	414602	6782798	64	No Significant Assay	No Significant Assay
FMAC0474	414653	6782795	25	No Significant Assay	No Significant Assay
FMAC0475	414701	6782801	26	No Significant Assay	No Significant Assay
FMAC0476	414749	6782800	24	No Significant Assay	No Significant Assay
FMAC0477	414801	6782797	28	No Significant Assay	No Significant Assay
FMAC0478	414859	6782797	35	No Significant Assay	No Significant Assay
FMAC0479	414903	6782804	30	No Significant Assay	No Significant Assay
FMAC0480	414951	6782802	49	No Significant Assay	No Significant Assay
FMAC0481	415000	6782800	63	No Significant Assay	No Significant Assay
FMAC0482	415053	6782801	69	No Significant Assay	No Significant Assay
FMAC0483	415104	6782798	73	No Significant Assay	No Significant Assay
FMAC0484	415152	6782799	69	No Significant Assay	No Significant Assay

5144 60405	445204	6702700	62		
FMAC0485	415201	6782798	62	No Significant Assay	No Significant Assay
FMAC0486	413200	6784008	94	4m at 0.10g/t Au from 88-92m	1m at 0.10g/t Ag from 93-94m
Hole ID	Easting	Northing	EOH m	AC Drilling Significant Results Au Assay Results	
FMAC0487	Easting 413250	6784002	84	No Significant Assay	EOH Ag Assay Results No Significant Assay
FMAC0487	413230	6784002	73	No Significant Assay	No Significant Assay
FMAC0489	413351	6783995	67	No Significant Assay	No Significant Assay
FMAC0489	413398	6783998	69	No Significant Assay	No Significant Assay
FMAC0490	413398	6783994	66	No Significant Assay	No Significant Assay
FMAC0491	413495	6783997	76	No Significant Assay	No Significant Assay
FMAC0492	413495	6784003	82	No Significant Assay	No Significant Assay
FMAC0493	413599	6784010	72	No Significant Assay	No Significant Assay
FMAC0495	413651	6784005	86	No Significant Assay	No Significant Assay
FMAC0496	413700	6783998	75	No Significant Assay	No Significant Assay
FMAC0497	413746	6783994	72	No Significant Assay	No Significant Assay
FMAC0498	413802	6784000	72	No Significant Assay	No Significant Assay
FMAC0499	413853	6784001	72	No Significant Assay	No Significant Assay
FMAC0500	413901	6784003	76	No Significant Assay	No Significant Assay
FMAC0501	413949	6784003	72	No Significant Assay	No Significant Assay
FMAC0502	414050	6783999	72	No Significant Assay	No Significant Assay
FMAC0503	414097	6783998	49	No Significant Assay	No Significant Assay
FMAC0504	414151	6784002	69	No Significant Assay	1m at 0.56g/t Ag from 69-69m
FMAC0505	414206	6784002	47	No Significant Assay	1m at 0.10g/t Ag from 46-47m
FMAC0506	414249	6783999	42	No Significant Assay	No Significant Assay
FMAC0507	414297	6784000	49	No Significant Assay	No Significant Assay
FMAC0508	414349	6784001	39	No Significant Assay	1m at 0.16g/t Ag from 38-39m
FMAC0509	414397	6784005	50	No Significant Assay	No Significant Assay
FMAC0510	414447	6784000	23	No Significant Assay	No Significant Assay
FMAC0511	414503	6784001	23	No Significant Assay	No Significant Assay
FMAC0512	414551	6784002	41	No Significant Assay	No Significant Assay
FMAC0513	414604	6784005	35	No Significant Assay	No Significant Assay
FMAC0514	414649	6783998	27	No Significant Assay	No Significant Assay
FMAC0515	414705	6783995	47	No Significant Assay	No Significant Assay
FMAC0516	414752	6784002	76	No Significant Assay	No Significant Assay
FMAC0517	414798	6784001	53	No Significant Assay	No Significant Assay
FMAC0518	413998	6783998	63	No Significant Assay	No Significant Assay
FMAC0519	413253	6784396	63	No Significant Assay	No Significant Assay
FMAC0520	413297	6784402	72	No Significant Assay	No Significant Assay
FMAC0521	413354	6784401	75	No Significant Assay	No Significant Assay
FMAC0522	413398	6784397	66	No Significant Assay	No Significant Assay
FMAC0523	413449	6784400	72	No Significant Assay	No Significant Assay
FMAC0524	413501	6784402	71	No Significant Assay	No Significant Assay
FMAC0525	413552	6784400	81	No Significant Assay	No Significant Assay
FMAC0526	413604	6784405	72	No Significant Assay	No Significant Assay
FMAC0527	413653	6784405	77	No Significant Assay	No Significant Assay
FMAC0528	413705	6784401	75	No Significant Assay	No Significant Assay
FMAC0529	413753	6784400	84	No Significant Assay	No Significant Assay
FMAC0530	413799	6784401	100	No Significant Assay	No Significant Assay
FMAC0531	413855	6784395	83	No Significant Assay	No Significant Assay
FMAC0532	413892	6784402	70	No Significant Assay	No Significant Assay
FMAC0533	413951	6784396	54	No Significant Assay	No Significant Assay
FMAC0534	414007	6784402	56	No Significant Assay	No Significant Assay

5144 60525	11 10 10	6704202	47		
FMAC0535	414048	6784393	47	No Significant Assay	No Significant Assay
FMAC0536	414104	6784397	53	No Significant Assay	No Significant Assay
				AC Drilling Significant Results	
Hole ID	Easting	Northing	EOH m	Au Assay Results	EOH Ag Assay Results
FMAC0537	414152	6784405	59	No Significant Assay	No Significant Assay
FMAC0538	414202	6784403	33	No Significant Assay	No Significant Assay
FMAC0539	414261	6784396	17	No Significant Assay	1m at 0.11g/t Ag from 16-17m
FMAC0540	414301	6784406	23	No Significant Assay	No Significant Assay
FMAC0541	414350	6784403	22	No Significant Assay	No Significant Assay
FMAC0542	414399	6784403	51	No Significant Assay	No Significant Assay
FMAC0543	414452	6784405	27	No Significant Assay	1m at 0.16g/t Ag from 26-27m
FMAC0544	414499	6784400	61	No Significant Assay	No Significant Assay
FMAC0545	414549	6784397	33	No Significant Assay	No Significant Assay
FMAC0546	414600	6784404	54	No Significant Assay	No Significant Assay
FMAC0547	414653	6784404	57	No Significant Assay	No Significant Assay
FMAC0548	414698	6784401	55	No Significant Assay	No Significant Assay
FMAC0549	414749	6784400	57	No Significant Assay	No Significant Assay
FMAC0550	414799	6784398	52	No Significant Assay	No Significant Assay
FMAC0551	414848	6784401	67	No Significant Assay	No Significant Assay
FMAC0563	413498	6782000	71	No Significant Assay	No Significant Assay
FMAC0564	413553	6781996	65	No Significant Assay	No Significant Assay
FMAC0565	413601	6782001	72	No Significant Assay	No Significant Assay
FMAC0566	413650	6782005	59	No Significant Assay	No Significant Assay
FMAC0567	413699	6782005	62	No Significant Assay	No Significant Assay
FMAC0568	413751	6782002	75	No Significant Assay	No Significant Assay
FMAC0569	413800	6781995	60	No Significant Assay	No Significant Assay
FMAC0570	413845	6782003	59	No Significant Assay	No Significant Assay
FMAC0571	413901	6782004	60	No Significant Assay	No Significant Assay
FMAC0572	413948	6781999	56	No Significant Assay	No Significant Assay
FMAC0573	414001	6782000	77	No Significant Assay	No Significant Assay
FMAC0574	414050	6782004	64	No Significant Assay	1m at 0.15g/t Ag from 63-64m
FMAC0575	414098	6781997	66	No Significant Assay	No Significant Assay
FMAC0576	414151	6781999	45	No Significant Assay	No Significant Assay
FMAC0577	414200	6782001	66	No Significant Assay	1m at 0.19g/t Ag from 65-66m
FMAC0578	414252	6782002	88	No Significant Assay	No Significant Assay
FMAC0579	414304	6782000	81	No Significant Assay	1m at 0.14g/t Ag from 80-81m
FMAC0580	414357	6781999	93	No Significant Assay	No Significant Assay
FMAC0581	414402	6782005	75	No Significant Assay	No Significant Assay
FMAC0582	414457	6782001	75	No Significant Assay	No Significant Assay
FMAC0583	414502	6781999	66	No Significant Assay	No Significant Assay
FMAC0584	414554	6781997	77	No Significant Assay	No Significant Assay
FMAC0585	414607	6782003	66	No Significant Assay	No Significant Assay
FMAC0586	414652	6782002	63	No Significant Assay	No Significant Assay
FMAC0587	414703	6782002	75	No Significant Assay	No Significant Assay
FMAC0588	414749	6782004	63	No Significant Assay	No Significant Assay
FMAC0589	414801	6782003	56	No Significant Assay	No Significant Assay
FMAC0590	414856	6782001	23	No Significant Assay	No Significant Assay
FMAC0591	414902	6781997	20	No Significant Assay	No Significant Assay
FMAC0592	414949	6782002	21	No Significant Assay	No Significant Assay
FMAC0593	415002	6782002	36	No Significant Assay	No Significant Assay
FMAC0594	415051	6782005	37	No Significant Assay	No Significant Assay
FMAC0595	415100	6782001	34	No Significant Assay	No Significant Assay

FMAC0615	414270	6784402	21	No Significant Assay	No Significant Assay
FMAC0616	414058	6784001	55	No Significant Assay	No Significant Assay

AC Drilling Significant Results Hole ID Easting Northing EOH m Au Assay Results EOH Ag Assay Results FMAC0617 413555 6782784 70 No Significant Assay No Significant Assay FMAC0618 414205 6779606 85 No Significant Assay No Significant Assay FMAC0619 414253 6779598 74 No Significant Assay No Significant Assay FMAC0620 414661 6779605 91 No Significant Assay 1m at 0.27g/t Ag from 90-91m FMAC0622 413251 6784397 60 No Significant Assay No Significant Assay

	-	1				ip Signifi								
			Au	Ag	As	Bi	Cu	Мо	Ni	Pb	S	Sb	Те	Zn
Sample ID	Easting	Northing	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm	ppm
C21226	406574	6791136	0.225	0.05	0.2	0.01	1.7	3.12	1.4	1	-100	0.23	0.39	
C21234	408163	6791097	1.13	0.05	0.7	0.62	2.3	2.46	2.3	0.8	100	0.06	2.33	1
C21235	408165	6791097	67.4	7.38	0.2	4.13	1.6	2.51	1.2	1	100	0.06	-0.05	
C21243	407730	6792406	0.734	0.08	-0.2	0.22	3.6	0.94	5.4	5.2	200	0.16	-0.05	1
C21381	413760	6785190	4.08	0.06	5.2	0.26	5.8	1.76	2.7	1.1	100	0.06	-0.05	
C21382	413769	6785195	2.29	0.09	6.4	0.58	4.6	2.85	2.5	1.1	200	0.08	0.09	
C21383	413766	6785186	0.257	-0.01	4.7	0.15	3.8	2.67	2.2	1.4	200	0.06	-0.05	-
C21385	413760	6785166	0.124	0.26	13.8	0.12	6.2	2.18	3.7	2.2	300	0.12	-0.05	
IE01014	410773	6783488	1.635	0.14	1.1	1.68	5.7	2.84	2.7	5.9	100	0.07	1.4	
IE01017	410793	6783487	0.173	0.05	1.3	4.54	3.9	0.43	6.3	4.3	100	0.12	3.82	1
IE01018	410794	6783483	15.45	2.34	5.3	20.5	7.1	2.47	5.4	12.8	100	0.26	20.7	
IE12283	406342	6791325	0.101	0.02	4.9	0.17	16.8	1.27	51.8	6.2	500	0.26	0.06	1
IE12457	413864	6785172	0.106	0.19	205	0.05	19.2	5.33	24.6	8.4	600	8.84	0.22	7
IE12458	413863	6785184	0.241	0.43	176	0.14	17.4	5.74	23.7	9.5	700	11.45	0.07	3
IE12460	413862	6785187	0.14	0.34	154	0.06	10	5.34	10.2	6.7	600	6.26	0.17	19
IE12485	413760	6785197	5.16	0.02	13	0.01	7.9	1.91	6.8	1.9	800	0.07	-0.05	1
IE12955	410694	6788065	2.41	1.74	417	0.11	119	0.86	135	6.5	37400	0.41	0.92	7
IE14257	406617	6791097	0.187	0.05	3	0.05	6.9	1.05	10.1	6.2	100	0.36	0.64	2
IE14424	413726	6786266	0.173	0.36	149.5	2.39	37.5	7.3	24.3	76.2	700	16.4	0.52	8
IE14426	413723	6786269	0.373	0.55	146	2.57	62.7	6.6	32.3	161	600	15.3	0.46	12
IE15378	408164	6791098	1.31	0.07	2.5	1.44	8.6	0.46	2.5	1.3	100	-0.05	3.29	7
IE15379	408164	6791099	3.22	0.91	0.2	0.75	1	0.61	1.1	1.2	-100	-0.05	0.6	
IE15381	408164	6791099	126	3.73	-0.2	0.12	1	0.59	1.6	0.9	-100	-0.05	0.49	
IE15963	413787	6786044	0.167	1.58	11.6	0.16	14.2	7.16	9	12.4	400	2.49	0.05	1
IE15981	414160	6785514	0.126	0.04	52.2	0.29	248	1.93	15.4	2.5	500	0.76	0.23	13
IE15989	413954	6785742	0.115	2.97	127	11.1	685	7.22	62.7	10.3	800	3.08	3.78	7
IE24962	411518	6793064	0.176	0.06	8.2	0.85	373	3.12	81.9	4.5	100	0.1	0.31	23
IE25002	413703	6785197	0.334	0.06	12	0.01	1.8	1.38	2	2	100	0.07	-0.05	
IE25431	403570	6793603	10.35	3.83	1	0.26	7.8	3.64	4.3	8.8	100	0.2	17.2	:
IE25432	403659	6793624	0.273	0.25	2.8	0.12	40.7	0.74	49.2	4.6	200	0.18	0.08	3
IE25440	403203	6793719	0.637	0.27	0.5	0.2	13	1.61	2.8	0.6	-100	0.08	0.17	
IE25444	403218	6793757	25.8	3.81	1.1	2.8	265	1.32	3.2	2.8	3000	0.07	3.17	3
IE25446	403172	6793720	0.232	0.06	2.4	0.1	31.2	0.8	13.5	1.9	900	0.08	0.05	3
IE25447	403196	6793772	0.181	0.03	0.8	0.06	6.8	1.35	9.1	2.5	100	0.09	-0.05	10
IE25460	403170	6793805	0.191	0.02	0.5	0.04	10.2	0.92	2.5	2.2	600	0.07	-0.05	2
IE25739	408151	6791102	0.162	0.07	-0.2	0.04	4.3	1.14	7.2	1.4	-100	0.09	0.08	10
IE26349	409035	6780857	0.318	0.01	3.8	0.04	35.6	2.52	26.7	12.4	1400	0.08	-0.05	13
IE26350	409033	6780860	0.359	0.02	11	0.02	38.2	1.7	31.5	10.7	1400	0.05	-0.05	14
IE26579	418949	6788229	0.237	1.22	0.3	17.9	4.7	61.4	1.5	20.1	200	0.05	1.15	-:
IE26597	407394	6779038	0.155	0.02	0.8	0.42	19.3	0.69	8.4	5.9	200	0.1	-0.05	1
IE26668	419409	6786322	0.226	0.08	1.5	0.34	24.7	2.21	5	0.6	200	0.14	0.72	2
IE26683	418749	6788223	0.265	0.41	1.3	9.67	13.6	23.7	4.6	151.5	500	0.13	1.82	1
IE26730	418570	6788375	0.362	0.68	0.9	6.27	11.2	28.5	7.4	13.7	500	0.44	1.07	1
IE27055	418757	6786220	0.208	0.17	1	11.15	147	16.3	13.8	4.6	600	0.33	4.59	1
IE27057	419363	6786450	1.575	0.09	1.1	0.02	29.3	2.71	5.5	1.6	100	0.19	0.18	4
IE27159	409034	6780852	0.543	0.05	7	0.07	37.5	1.43	36.8	11	1500	0.05	0.1	194

IE27168	403220	6793752	15.1	0.8	-0.2	0.98	11.4	3.99	3.1	0.5	100	0.06	0.4	5
IE27168	403220	6793752	0.598	0.8	-0.2	2.14	48.9	2.07	1.9	2.1	300	-0.05	0.4	3
IE27169	403198	6794045	0.598		0.8	0.27	48.9	3.57	4.2	-0.5	100	0.05	0.21	-
-				0.1		-							-	1
IE27174	401574	6794066	0.282	0.81	2.3	2.43	357	3.51	12.7	0.8	300	0.12	2.02	9
IE27285	411489	6793182	3.71	0.95	13.4	0.98	3830	2.09	421	2	300	0.11	2.49	41
IE27301	413755	6785183	0.816	0.04	2.9	0.03	5.4	2.38	1.6	0.8	-100	0.06	0.05	
IE27302	413763	6785192	0.704	0.13	59.2	0.09	24.3	2.85	22.2	9.5	300	0.22	0.15	3
E27322	410788	6783487	9.72	1.06	11.4	32.8	16.3	2.34	4.8	21.9	300	0.35	39.8	
IE27411	412071	6792342	18.25	1.14	23.9	3.43	3660	1.6	35.6	1.9	100	0.11	2.16	63
IE27412	412072	6792344	2.11	10.25	40.3	6.59	2240	2.02	23.5	4.7	1600	0.19	4.12	127
IE27413	412069	6792353	0.282	3.92	84.6	2.38	1455	1.45	43.1	10.1	1200	1.38	0.54	159
IE27415	412071	6792341	4.06	9.69	4.1	6.51	3450	2.34	37	2.4	800	0.11	4.91	61
IE27416	412073	6792346	0.347	0.71	5.7	4.92	359	2.41	23.5	4.9	600	0.09	1.91	26
IE29947	410680	6783328	0.112	-0.01	0.4	0.12	2	1.85	3.6	4.7	-100	-0.05	3.08	
IE29955	410800	6782829	0.12	-0.01	-0.2	0.02	0.9	1.66	2.8	-0.5	-100	-0.05	-0.05	
IE29965	411001	6782382	135.5	3.03	-0.2	0.04	1.7	1.39	3	-0.5	-100	-0.05	0.15	
IE29966	410999	6782382	0.498	-0.01	1.1	0.32	10.5	2.05	12	1	400	0.13	0.45	
IMCA000392	409720	6779168	0.5	0.22	2.2	2.23	34.3	1.96	5.8	8.5	300	0.05	0.24	3
IMCA000394	410769	6783494	0.204	0.09	1.4	1.64	6.6	2.82	2.3	2.4	-100	0.08	3.65	-
IMCA000398	410770	6783499	0.189	0.1	0.9	0.29	428	3.34	1.7	6	100	0.38	0.22	
IMCA000472	405745	6791172	1.345	0.09	0.2	0.03	3.9	2.07	2.7	1	300	0.14	-0.05	
JP198	413759	6785192	1.3	0.012	2.93	0.054	1.21	2.18	1.22	0.9	-100	0.03	0.016	2.
JP201	413758	6785090	0.29	0.061	3.15	0.048	4.13	4.46	4.86	1.63	300	0.16	0.012	5.
LYM16697	411565	6793182	0.429	0.06	0.5	0.04	12.4	0.54	166.5	1.5	100	0.11	-0.05	12
MC1811014	414852	6782338	1.305	0.146	2.15	0.562	113	2.54	23.8	7.09	400	0.08	0.89	12
MR2102036	413863	6785181	0.15	0.192	34	0.04	26.8	1.82	7.34	1.66	400	1.91	0.026	12
R133	413764	6785197	1.07	0.015	4.49	0.017	3.57	0.59	1.79	2.08	100	0.04	-0.04	2
WW190507	404430	6790659	1.68	0.289	3370	0.056	20.5	0.72	68.2	5.03	100	17.3	0.21	82
WW190517	414840	6782335	0.17	0.061	3.53	0.18	44.9	1.58	21.9	2.94	700	0.04	0.18	17