

Grade Control Drilling Program Completed at Munda Gold Project

Highlights

- Grade control drilling program at Munda Gold Project completed with 351 holes drilled.
- Assays received for 244 holes including numerous high-grade intersections such as:

MGCR0401	16m @ 12.54g/t Au
MGCR0057	9m @ 21.37g/t Au, including 1m @ 184.60g/t Au
MGCR0007	4m @ 20.13g/t Au, including 1m @ 77.18g/t Au
MGCR0372	4m @ 18.84g/t Au, including 1m @ 68.94g/t Au

- An updated resource model integrating the grade control drilling will be completed once all results are received.

Management Comment

Managing Director, Mark English, said: *"It is terrific to be back drilling and concentrating on Munda. This is our main asset and flagship project. The drilling results to date have provided many high grade gold intersections.*

"Only 70% of the assay results have been received, so we don't have a complete understanding, but we are excited with the gold results so far. It will take more time to fully analyse the data from the 10,985 samples collected and then to define the way forward.

"We believe that Munda will become a sizeable cash producer for Auric. Last year's Scoping Study showed of the order of 112,000 to 129,100 ounces of gold can be mined from Munda. Munda is where our efforts are focused."

For personal use only

The Announcement

Auric Mining Limited (ASX: **AWJ**) (**Auric** or **the Company**) is pleased to announce that the first phase of grade control drilling has been completed at the Munda Gold Project, near Widgiemooltha, WA.

A total of 351 holes were drilled on a 10m x 10m pattern for 10,895m. Assays have been received for 244 holes, up to 19 January 2024, representing approximately 70% of the samples submitted.

Assay results include numerous significant intercepts at a 0.5g/t Au cut-off (Appendix 1) with high grade or broad intercepts such as:

MGCR0401	16m @ 12.54g/t Au
MGCR0057	9m @ 21.37g/t Au, including 1m @ 184.60g/t Au
MGCR0007	4m @ 20.13g/t Au, including 1m @ 77.18g/t Au
MGCR0372	4m @ 18.84g/t Au, including 1m @ 68.94g/t Au
MGCR0035	7m @ 4.03g/t Au
MGCR0070	14m @ 2.55g/t Au, including 1m @ 23.2g/t Au
MGCR0082	17m @ 1.57g/t Au
MGCR0084	12m @ 3.38g/t Au
MGCR0116	9m @ 5.40g/t Au
MGCR0150	5m @ 4.39g/t Au
MGCR0280	9m @ 3.85g/t Au
MGCR0367	6m @ 4.64g/t Au, including 1m @ 24.14g/t Au
MGCR0385	6m @ 3.42g/t Au
MGCR0392	4m @ 6.49g/t Au
MGCR0402	11m @ 4.51g/t Au, including 2m @ 18.11g/t Au

Grade Control Program

The drill pattern covered the starter pit defined in a recent Scoping Study¹ within a larger area of near surface mineralisation (Figure 1).

Drilling was undertaken by Kalgoorlie-based Total Drilling Services Pty Ltd (TDS). Most holes were drilled vertically to depths of 30-35m, targeting either the 350m or 345m reduced level (RL). Angled holes were drilled around the margin of the historic Resolute trial pit together with some in the trial pit. Shallower vertical holes were drilled in the Resolute trial pit to reach the same elevations.

¹ (ASX: AWJ) 28 June 2023: Positive Scoping Study for Munda Gold Project

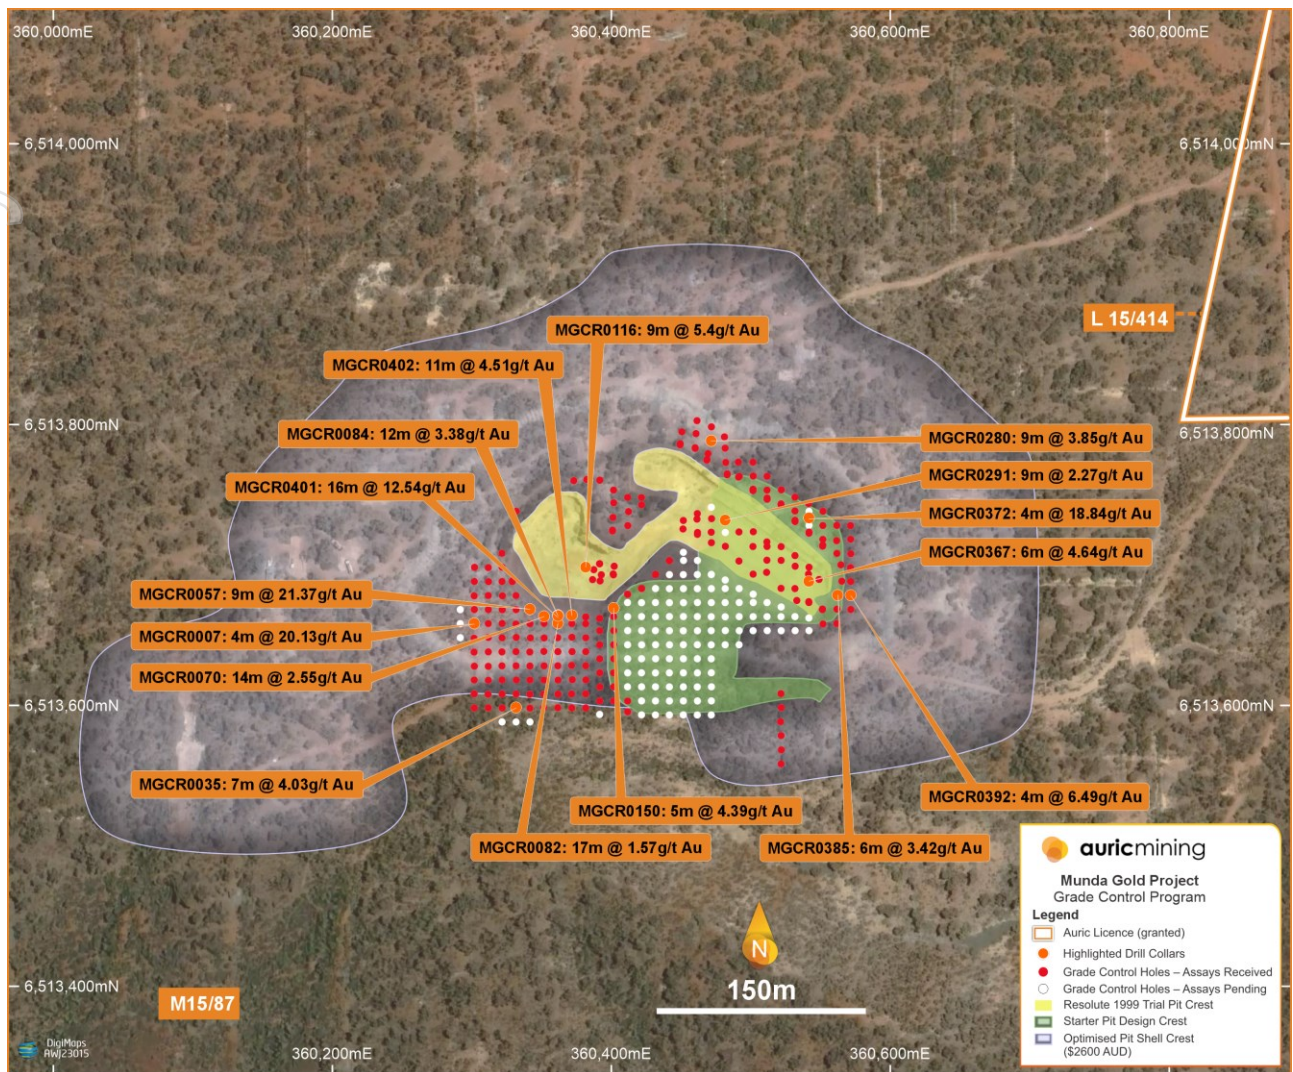


Figure 1. Munda optimised pit outline, starter pit and existing trial pit with completed grade control drill holes and selected intercepts at a 0.5g/t cut-off.

RC drill holes were sampled at 1m intervals and samples assayed for gold via a 50g fire assay. Significant assays at a 0.5g/t cut-off are recorded in Appendix 1 and drill hole details in Appendix 2. A JORC checklist describing sampling techniques and reporting criteria is shown in Appendix 3.

The assay results reaffirm the frequent high grades and limited continuity of gold mineralisation. Geological logging confirms that gold mineralisation is visually very subtle with a well-developed foliation common but only trace sulphides and often no veining. The use of close-spaced grade control drilling will be essential to detailed definition and mining of the deposit.

A resource model will be developed for the volume defined by the grade control drilling once all results are received. This will lead to a refined model for the deposit and a basis for further assessment of development options. The drill data will also be used to assess optimal grade control drill spacing which will be closer spaced than 10m x 10m.



Other Work Completed

A 7-hole RC drilling program is underway to test several drill targets approximately 1km to the east of the Munda gold deposit, within the Munda mining lease, M15/87. The drill rig operated by Kalgoorlie-based Kennedy Drilling will then drill 10 grade control holes at Munda to add drill detail to 2 areas of mineralisation defined by results to date from the grade control program.

A detailed topographic survey was completed by Spectrum Surveys, covering most of Mining Lease, M15/87 and a section of the planned haul road within Miscellaneous Licence, L15/414.

Samples representing a range of potential waste rock types and ore stockpiles have been submitted for Acid Mine Drainage testwork under the supervision of MBS Environmental.

Metallurgical sampling is ongoing with several ore types well represented in the grade control drilling, sampled accordingly.

Compliance Statements

The information in this announcement that relates to exploration results is based on and fairly represents information and supporting documentation compiled by Mr John Utley, who is a full-time employee of Auric Mining Limited. Mr Utley is a Competent Person and a member of the Australian Institute of Geoscientists. Mr Utley has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Utley consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Information on the Scoping Study for Munda is extracted from the report *Positive Scoping Study for Munda Gold Project* announced to the ASX on 28 June 2023 and is available to view on the Company website; www.auricmining.com.au. The Company confirms that it is not aware of any new information or data that materially affects the information included in the original market announcement. The company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

This announcement has been approved for release by the Board.

Corporate Enquiries

Mark English

Managing Director

Auric Mining Limited

+61 409 372 775

menglish@auricmining.com.au

Follow our communications



Subscribe: auricmining.com.au

Appendix 1 Significant Gold Intervals at 0.5g/t cut-off

Hole ID	From (m)	To (m)	Downhole Interval (m)	Au (g/t)	
MGCR0001	8	9	1	4.41	
MGCR0001	12	13	1	0.73	
MGCR0001	21	24	3	1.36	
MGCR0001	28	29	1	0.71	
MGCR0003	15	16	1	1.11	
MGCR0003	28	29	1	1.03	
MGCR0004	23	24	1	0.53	
MGCR0005	5	6	1	1.04	
MGCR0006	10	11	1	0.94	
MGCR0006	19	20	1	0.69	
MGCR0007	21	23	2	2.43	
MGCR0007	28	32	4	20.13	
	incl	29	30	1	77.18
MGCR0008	13	14	1	0.55	
MGCR0009	11	12	1	5.79	
MGCR0009	17	18	1	0.56	
MGCR0010	24	25	1	1.16	
MGCR0011	28	29	1	1.11	
MGCR0013	6	7	1	0.96	
MGCR0013	12	13	1	0.70	
MGCR0014	22	23	1	1.50	
MGCR0015	12	16	4	0.60	
MGCR0015	27	29	2	2.32	
MGCR0016	14	16	2	0.52	
MGCR0016	18	19	1	0.70	
MGCR0017	12	13	1	0.54	
MGCR0017	18	19	1	0.82	
MGCR0018	0	2	2	0.71	
MGCR0018	18	21	3	0.90	
MGCR0018	27	30	3	0.60	
MGCR0019	7	12	5	0.61	
MGCR0019	28	32	4	0.62	
MGCR0020	25	26	1	1.94	
MGCR0021	13	14	1	1.11	
MGCR0024	7	12	5	1.52	
MGCR0025	23	24	1	0.54	
MGCR0025	32	33	1	22.13 !	
MGCR0026	0	2	2	0.63	
MGCR0026	27	31	4	1.84	
MGCR0027	7	10	3	0.69	
MGCR0027	25	26	1	0.59	

MGCR0028	8	10	2	0.67
MGCR0028	22	25	3	0.62
MGCR0028	30	31	1	1.18
MGCR0029	15	16	1	0.64
MGCR0029	25	26	1	1.04
MGCR0029	30	32	2	0.69 !
MGCR0030	13	16	3	0.77
MGCR0031	7	8	1	0.72
MGCR0031	19	20	1	0.54
MGCR0035	4	11	7	4.03
MGCR0036	14	15	1	1.49
MGCR0036	14	15	1	1.49
MGCR0036	18	19	1	0.52
MGCR0038	15	17	2	0.98
MGCR0038	32	33	1	1.31 !
MGCR0039	15	16	1	0.67
MGCR0039	19	20	1	0.60
MGCR0040	15	16	1	7.30
MGCR0040	20	21	1	0.50
MGCR0040	24	31	7	0.53
MGCR0041	5	6	1	0.69
MGCR0041	10	19	9	0.60
MGCR0042	23	24	1	0.76
MGCR0043	20	21	1	0.74
MGCR0044	2	3	1	0.67
MGCR0044	28	29	1	4.56
MGCR0045	5	6	1	1.38
MGCR0045	27	29	2	1.07
MGCR0050	9	15	6	0.72
MGCR0050	20	25	5	0.78
MGCR0051	26	27	1	0.80
MGCR0052	7	8	1	1.33
MGCR0052	15	16	1	0.81
MGCR0053	20	21	1	0.56
MGCR0054	16	20	4	2.26
MGCR0054	24	26	2	2.65
MGCR0055	3	9	6	1.59
MGCR0055	22	25	3	1.42
MGCR0055	29	31	2	0.63
MGCR0057	0	1	1	0.69
MGCR0057	7	8	1	1.08
MGCR0057	18	27	9	21.37
incl	24	25	1	184.60
MGCR0058	0	1	1	1.11
MGCR0058	30	32	2	5.75
MGCR0062	1	2	1	0.51
MGCR0064	12	14	2	0.62

MGCR0065	17	18	1	1.18
MGCR0065	22	25	3	0.93
MGCR0066	29	30	1	1.81
MGCR0067	13	15	2	1.04
MGCR0067	19	21	2	0.89
MGCR0068	8	13	5	1.04
MGCR0069	25	27	2	0.58
MGCR0070	8	19	11	1.46
MGCR0070	23	24	1	0.79
MGCR0070	33	47	14	2.55 !
incl	42	43	1	23.20
MGCR0078	12	17	5	0.62
MGCR0079	19	21	2	0.82
MGCR0079	26	30	4	1.36
MGCR0079	34	35	1	0.52
MGCR0080	10	11	1	1.13 !
MGCR0080	13	20	7	2.35
MGCR0080	26	27	1	0.56
MGCR0080	35	37	2	0.58 !
MGCR0081	0	1	1	1.19
MGCR0081	34	36	2	0.93 !
MGCR0082	17	34	17	1.57
MGCR0083	16	17	1	1.51
MGCR0083	34	41	7	0.96 !
MGCR0084	8	10	2	2.79
MGCR0084	14	15	1	0.94
MGCR0084	24	36	12	3.38
MGCR0091	7	8	1	1.72
MGCR0091	32	33	1	1.17
MGCR0092	3	4	1	2.34
MGCR0092	10	12	2	0.54
MGCR0093	17	18	1	4.56
MGCR0094	18	20	2	0.71
MGCR0094	23	24	1	2.90
MGCR0095	23	28	5	2.68
MGCR0095	31	36	3	1.38 !
MGCR0096	25	26	1	4.47
MGCR0096	30	32	2	2.49
MGCR0097	16	17	1	0.51
MGCR0097	24	28	4	2.34
MGCR0098	29	33	4	0.81
MGCR0099	40	42	2	0.79
MGCR0107	14	15	1	1.28
MGCR0108	15	16	1	0.87
MGCR0108	27	29	2	0.65
MGCR0109	15	16	1	0.90
MGCR0109	22	29	7	1.11

For personal use only

MGCR0110	7	8	1	1.39
MGCR0110	23	24	1	0.53
MGCR0111	1	2	1	3.47
MGCR0111	30	31	1	0.50
MGCR0112	23	24	1	0.66
MGCR0112	33	34	1	0.59 !
MGCR0113	25	26	1	0.54
MGCR0113	33	35	2	0.94 !
MGCR0115	5	11	6	0.81
MGCR0116	6	15	9	5.40 !
MGCR0126	1	3	2	1.71
MGCR0127	9	12	3	0.82
MGCR0128	22	27	5	0.81
MGCR0129	22	23	1	0.90
MGCR0129	26	28	2	0.98
MGCR0132	11	12	1	1.01
MGCR0133	1	2	1	0.87
MGCR0135	9	11	2	0.77
MGCR0135	14	15	1	0.92
MGCR0136	10	15	5	3.05 !
MGCR0137	0	1	1	0.65
MGCR0137	17	18	1	0.79 !
MGCR0143	3	8	5	0.80
MGCR0145	22	24	2	3.97
MGCR0145	27	28	1	0.62
MGCR0146	29	30	1	1.21
MGCR0149	6	13	7	1.59
MGCR0149	31	32	1	1.95
MGCR0150	0	5	5	4.39
MGCR0151	1	2	1	0.67
MGCR0152	6	7	1	0.82
MGCR0153	8	9	1	0.89
MGCR0154	17	18	1	1.22
MGCR0154	23	24	1	4.33
MGCR0154	27	28	1	2.89
MGCR0154	37	38	1	12.44
MGCR0155	12	15	3	2.19
MGCR0155	18	19	1	1.27
MGCR0155	34	35	1	0.58 !
MGCR0156	18	19	1	1.83
MGCR0156	24	26	2	1.85
MGCR0157	30	35	5	1.71
MGCR0158	29	30	1	0.58
MGCR0159	5	6	1	0.75
MGCR0160	10	11	1	0.67
MGCR0160	19	20	1	0.87
MGCR0168	13	15	2	2.76

For personal use only

MGCR0172	7	8	1	0.51
MGCR0172	30	31	1	1.60
MGCR0173	32	36	4	1.99 !
MGCR0184	19	20	1	0.92
MGCR0185	32	36	4	0.73 !
MGCR0189	32	33	1	0.57
MGCR0201	8	11	3	5.91
MGCR0202	23	25	2	1.02
MGCR0236	12	13	1	0.87
MGCR0238	30	36	6	2.44
MGCR0239	12	13	1	1.14
MGCR0239	17	19	2	0.72
MGCR0240	18	19	1	0.64
MGCR0255	0	1	1	1.45
MGCR0256	21	23	2	2.58
MGCR0258	6	7	1	0.79
MGCR0258	13	14	1	0.55
MGCR0258	21	22	1	0.84
MGCR0260	30	31	1	0.84
MGCR0274	12	15	3	1.14
MGCR0274	20	21	1	2.55
MGCR0275	5	6	1	1.05
MGCR0277	31	36	5	0.86
MGCR0280	21	30	9	3.85
MGCR0281	31	32	1	1.95
MGCR0291	1	2	1	6.67
MGCR0291	5	13.71	8.56	2.18
MGCR0291	16.29	19	2.71	2.08
MGCR0293	18	19	1	0.66
MGCR0293	34	42	8	1.44 !
MGCR0304	5	6	1	4.45
MGCR0304	14	15	1	0.68
MGCR0304	22	25	3	0.81
MGCR0309	37	38	1	0.76
MGCR0316	2	6	4	0.60
MGCR0316	10	12	2	0.57
MGCR0318	7	9	2	1.23
MGCR0321	30	31	1	0.79
MGCR0329	9	10	1	0.93
MGCR0329	12	13	1	0.83
MGCR0330	11	12	1	0.86
MGCR0330	16	17	1	0.64 !
MGCR0331	0	2	2	3.78
MGCR0331	5	6	1	0.51
MGCR0332	2	3	1	0.58
MGCR0339	8	9	1	0.53
MGCR0341	19	21	2	1.53

MGCR0342	20	21	1	0.60
MGCR0346	8	10	2	2.30
MGCR0346	15	17	2	1.06
MGCR0348	1	2	1	0.97
MGCR0348	15	16	1	4.17
MGCR0348	19	21	2	2.96
MGCR0349	18	19	1	1.04
MGCR0356	17	18	1	0.84
MGCR0356	22	28	6	0.52
MGCR0357	14	17	3	3.36
MGCR0357	22	23	1	0.98
MGCR0357	28	29	1	0.68
MGCR0358	7	11	4	3.26
MGCR0358	19	20	1	0.69
MGCR0359	6	7	1	2.00
MGCR0359	10	16	6	1.54
MGCR0366	21	23	2	5.95
MGCR0367	10	11	1	0.83
MGCR0367	17	23	6	4.64
incl	22	23	1	24.14
MGCR0368	2	3	1	1.23
MGCR0368	17	21	4	1.13
MGCR0369	14	16	2	2.02
MGCR0372	11	15	4	18.84
incl	13	14	1	68.94
MGCR0375	25	31	6	0.86
MGCR0377	3	5	2	1.73
MGCR0385	21	27	6	3.42
MGCR0386	11	12	1	0.52
MGCR0392	9	13	4	6.49
MGCR0392	16	19	3	2.61
MGCR0393	23	24	1	0.74
MGCR0393	29	30	1	0.68
MGCR0399	28	30	2	1.44
MGCR0399	34	36	2	2.20
MGCR0400	11	12	1	1.69
MGCR0400	24	25	1	0.86
MGCR0400	30	31	1	0.65
MGCR0401	8	24	16	12.54
MGCR0402	40	51	11	4.51
incl	42	44	2	18.11
MGCR0403	17	23	6	0.59

! Mineralisation to bottom of hole

Appendix 2 Drill Hole Details

Hole_ID	Type	Hole Depth (m)	MGA_East	MGA_North	Orig_RL	Dip	MGA_Azi
MGCR0001	RC	32	360325.06	6513599.98	381.82	-90	360
MGCR0002	RC	33	360325.02	6513610.00	382.08	-90	360
MGCR0003	RC	33	360325.02	6513619.88	382.33	-90	360
MGCR0004	RC	33	360325.11	6513629.73	382.75	-90	360
MGCR0005	RC	33	360324.92	6513639.77	382.87	-90	360
MGCR0006	RC	33	360324.90	6513649.64	382.96	-90	360
MGCR0007	RC	33	360325.00	6513659.73	382.90	-90	360
MGCR0008	RC	34	360325.11	6513670.05	383.19	-90	360
MGCR0009	RC	34	360324.99	6513679.85	383.88	-90	360
MGCR0010	RC	35	360325.11	6513690.04	384.46	-90	360
MGCR0011	RC	35	360325.26	6513700.17	384.88	-90	360
MGCR0012	RC	33	360335.09	6513600.08	382.33	-90	360
MGCR0013	RC	33	360334.96	6513609.72	382.61	-90	360
MGCR0014	RC	33	360335.14	6513619.70	382.64	-90	360
MGCR0015	RC	33	360335.09	6513629.63	382.97	-90	360
MGCR0016	RC	33	360335.11	6513639.93	382.70	-90	360
MGCR0017	RC	33	360335.17	6513650.17	382.41	-90	360
MGCR0018	RC	33	360335.12	6513660.09	382.32	-90	360
MGCR0019	RC	33	360335.14	6513670.03	382.51	-90	360
MGCR0020	RC	33	360335.09	6513680.02	382.91	-90	360
MGCR0021	RC	34	360335.28	6513689.93	383.35	-90	360
MGCR0022	RC	34	360335.10	6513699.94	383.87	-90	360
MGCR0023	RC	33	360345.11	6513599.95	382.62	-90	360
MGCR0024	RC	33	360345.01	6513609.93	382.75	-90	360
MGCR0025	RC	33	360344.99	6513619.96	382.80	-90	360
MGCR0026	RC	33	360344.90	6513629.95	382.80	-90	360
MGCR0027	RC	33	360344.89	6513639.91	382.69	-90	360
MGCR0028	RC	33	360345.01	6513649.91	382.10	-90	360
MGCR0029	RC	32	360345.03	6513660.19	381.79	-90	360
MGCR0030	RC	32	360345.14	6513669.93	381.82	-90	360
MGCR0031	RC	33	360345.24	6513679.87	381.95	-90	360
MGCR0032	RC	33	360344.96	6513690.00	382.48	-90	360
MGCR0033	RC	34	360345.05	6513700.21	383.14	-90	360
MGCR0034	RC	35	360344.89	6513710.13	384.00	-90	360
MGCR0035	RC	33	360355.06	6513599.94	382.40	-90	360
MGCR0036	RC	33	360355.08	6513609.93	382.52	-90	360
MGCR0037	RC	33	360355.24	6513619.91	382.54	-90	360
MGCR0038	RC	33	360355.02	6513629.97	382.49	-90	360
MGCR0039	RC	33	360354.98	6513640.08	382.24	-90	360
MGCR0040	RC	32	360355.16	6513650.21	381.81	-90	360
MGCR0041	RC	32	360354.94	6513659.82	381.24	-90	360

MGCR0042	RC	32	360355.03	6513669.99	381.20	-90	360
MGCR0043	RC	32	360354.98	6513679.98	381.24	-90	360
MGCR0044	RC	32	360352.32	6513689.90	381.86	-90	360
MGCR0045	RC	37	360352.29	6513690.49	382.00	-60	360
MGCR0049	RC	34	360355.19	6513740.09	383.96	-90	360
MGCR0050	RC	33	360364.95	6513599.83	382.12	-90	360
MGCR0051	RC	33	360364.94	6513609.69	382.19	-90	360
MGCR0052	RC	33	360364.95	6513619.90	382.12	-90	360
MGCR0053	RC	33	360364.98	6513629.84	382.07	-90	360
MGCR0054	RC	32	360364.87	6513639.84	382.01	-90	360
MGCR0055	RC	32	360365.34	6513649.88	381.42	-90	360
MGCR0056	RC	31	360365.00	6513659.96	380.85	-90	360
MGCR0057	RC	31	360364.95	6513670.05	380.57	-90	360
MGCR0058	RC	36	360364.94	6513670.64	380.59	-60	360
MGCR0062	RC	37	360374.82	6513600.24	381.63	-90	360
MGCR0063	RC	37	360374.86	6513609.76	381.56	-90	360
MGCR0064	RC	37	360375.02	6513619.86	381.84	-90	360
MGCR0065	RC	37	360375.10	6513629.98	381.95	-90	360
MGCR0066	RC	37	360374.95	6513640.24	381.76	-90	360
MGCR0067	RC	37	360375.12	6513649.83	380.94	-90	360
MGCR0068	RC	41	360375.12	6513660.25	380.27	-90	360
MGCR0069	RC	42	360375.06	6513665.04	380.24	-80	360
MGCR0070	RC	47	360375.07	6513665.81	380.39	-60	360
MGCR0076	RC	36	360384.92	6513600.11	380.95	-90	360
MGCR0077	RC	36	360385.13	6513609.84	380.96	-90	360
MGCR0078	RC	37	360385.13	6513619.83	381.22	-90	360
MGCR0079	RC	37	360384.95	6513630.01	381.44	-90	360
MGCR0080	RC	37	360385.02	6513640.07	381.23	-90	360
MGCR0081	RC	36	360384.91	6513649.99	380.45	-90	360
MGCR0082	RC	35	360385.04	6513660.31	379.82	-90	360
MGCR0083	RC	41	360385.05	6513665.71	379.50	-80	360
MGCR0084	RC	45	360385.16	6513665.74	379.50	-65	360
MGCR0091	RC	36	360394.99	6513600.01	380.50	-90	360
MGCR0092	RC	36	360394.82	6513609.93	380.09	-90	360
MGCR0093	RC	36	360395.35	6513620.10	380.32	-90	360
MGCR0094	RC	36	360394.86	6513630.31	380.70	-90	360
MGCR0095	RC	36	360395.20	6513640.07	380.55	-90	360
MGCR0096	RC	35	360395.05	6513650.35	379.85	-90	360
MGCR0097	RC	35	360394.98	6513660.02	379.41	-90	360
MGCR0098	RC	41	360395.03	6513665.69	379.18	-80	360
MGCR0099	RC	45	360395.00	6513665.75	379.06	-65	360
MGCR0105	RC	31	360396.39	6513761.85	380.48	-90	360
MGCR0106	RC	30	360404.94	6513599.96	379.83	-90	360
MGCR0107	RC	30	360404.96	6513610.03	379.30	-90	360
MGCR0108	RC	30	360405.05	6513619.97	379.55	-90	360
MGCR0109	RC	30	360404.93	6513630.06	379.74	-90	360

For personal use only

MGCR0110	RC	30	360405.00	6513640.06	379.72	-90	360
MGCR0111	RC	35	360405.02	6513649.96	379.24	-90	360
MGCR0112	RC	34	360404.94	6513659.95	378.84	-90	360
MGCR0113	RC	35	360404.97	6513664.77	378.72	-80	360
MGCR0114	RC	39	360404.99	6513664.80	378.75	-60	360
MGCR0115	RC	15	360409.89	6513691.38	359.94	-90	360
MGCR0116	RC	15	360410.76	6513698.45	359.93	-90	360
MGCR0122	RC	36	360405.76	6513762.70	380.13	-90	360
MGCR0125	RC	30	360414.96	6513595.37	379.64	-90	360
MGCR0126	RC	29	360414.97	6513605.02	378.17	-90	360
MGCR0127	RC	29	360415.07	6513615.00	378.14	-90	360
MGCR0128	RC	29	360415.04	6513625.01	378.55	-90	360
MGCR0129	RC	34	360414.99	6513634.95	378.82	-90	360
MGCR0130	RC	34	360414.95	6513644.97	378.52	-90	360
MGCR0131	RC	34	360414.98	6513655.03	378.27	-90	360
MGCR0132	RC	33	360414.90	6513663.81	377.75	-90	360
MGCR0133	RC	38	360414.90	6513663.81	377.75	-60	360
MGCR0134	RC	17	360415.27	6513690.46	360.18	-70	180
MGCR0135	RC	16	360416.12	6513694.84	360.14	-90	360
MGCR0136	RC	15	360414.92	6513702.69	359.96	-90	360
MGCR0137	RC	18	360414.92	6513702.67	359.95	-60	360
MGCR0140	RC	33	360415.04	6513762.19	379.80	-60	180
MGCR0141	RC	35	360415.04	6513762.19	379.80	-90	360
MGCR0143	RC	28	360424.98	6513605.05	377.53	-90	360
MGCR0144	RC	28	360425.01	6513615.02	377.37	-90	360
MGCR0145	RC	33	360424.94	6513624.98	377.69	-90	360
MGCR0146	RC	33	360425.05	6513634.98	377.97	-90	360
MGCR0147	RC	33	360424.99	6513645.04	377.86	-90	360
MGCR0148	RC	33	360425.02	6513655.03	377.80	-90	360
MGCR0149	RC	33	360424.97	6513664.98	377.26	-90	360
MGCR0150	RC	33	360424.99	6513670.86	376.96	-80	360
MGCR0151	RC	20	360424.86	6513694.79	361.63	-60	180
MGCR0152	RC	17	360424.67	6513695.39	361.54	-90	360
MGCR0153	RC	18	360425.38	6513700.93	361.91	-70	360
MGCR0154	RC	40	360424.15	6513726.01	378.57	-60	180
MGCR0155	RC	35	360424.15	6513726.64	378.55	-80	180
MGCR0156	RC	35	360424.47	6513735.65	379.20	-90	360
MGCR0157	RC	36	360425.01	6513746.09	379.62	-90	360
MGCR0158	RC	35	360424.91	6513755.15	379.87	-90	360
MGCR0159	RC	29	360435.04	6513597.25	378.97	-90	360
MGCR0160	RC	28	360435.02	6513604.93	377.34	-90	360
MGCR0161	RC	27	360434.96	6513615.07	376.63	-90	360
MGCR0162	RC	32	360435.06	6513624.96	376.95	-90	360
MGCR0163	RC	33	360435.03	6513634.98	377.20	-90	360
MGCR0164	RC	32	360435.01	6513644.97	376.89	-90	360
MGCR0165	RC	32	360435.04	6513655.04	376.87	-90	360

MGCR0166	RC	32	360434.99	6513664.95	376.60	-90	360
MGCR0167	RC	32	360434.94	6513675.01	376.19	-90	360
MGCR0168	RC	32	360434.98	6513680.93	376.00	-80	360
MGCR0172	RC	34	360435.14	6513729.84	378.41	-90	360
MGCR0173	RC	36	360435.65	6513739.82	378.85	-90	360
MGCR0174	RC	36	360434.98	6513749.93	380.21	-90	360
MGCR0175	RC	30	360445.00	6513595.05	379.42	-90	360
MGCR0176	RC	27	360445.01	6513605.02	376.97	-90	360
MGCR0177	RC	26	360445.02	6513615.05	375.78	-90	360
MGCR0178	RC	32	360444.96	6513625.01	376.07	-90	360
MGCR0179	RC	32	360445.00	6513635.03	376.37	-90	360
MGCR0180	RC	32	360445.05	6513644.94	376.00	-90	360
MGCR0181	RC	31	360445.06	6513655.03	375.98	-90	360
MGCR0182	RC	31	360445.03	6513665.07	375.86	-90	360
MGCR0183	RC	31	360444.98	6513674.94	375.77	-90	360
MGCR0184	RC	31	360445.05	6513685.08	375.80	-90	360
MGCR0185	RC	36	360445.05	6513685.08	375.80	-60	360
MGCR0189	RC	37	360445.02	6513744.59	380.89	-90	180
MGCR0190	RC	37	360444.91	6513749.86	381.24	-90	360
MGCR0191	RC	30	360454.93	6513595.01	379.38	-90	360
MGCR0192	RC	27	360454.99	6513604.97	376.90	-90	360
MGCR0193	RC	26	360454.95	6513615.03	375.08	-90	360
MGCR0194	RC	31	360454.95	6513624.92	375.39	-90	360
MGCR0195	RC	31	360455.08	6513635.02	375.75	-90	360
MGCR0196	RC	31	360455.04	6513644.98	375.39	-90	360
MGCR0197	RC	31	360454.91	6513655.04	375.30	-90	360
MGCR0198	RC	31	360454.95	6513664.95	375.27	-90	360
MGCR0199	RC	31	360454.95	6513675.04	375.41	-90	360
MGCR0200	RC	31	360455.00	6513685.02	375.59	-90	360
MGCR0201	RC	31	360454.99	6513695.06	375.78	-90	360
MGCR0202	RC	35	360454.99	6513695.06	375.78	-65	360
MGCR0207	RC	29	360464.92	6513595.02	378.99	-90	360
MGCR0208	RC	27	360464.98	6513604.95	376.73	-90	360
MGCR0209	RC	25	360464.95	6513614.98	374.45	-90	360
MGCR0210	RC	30	360464.92	6513624.98	374.69	-90	360
MGCR0211	RC	31	360464.93	6513635.03	375.24	-90	360
MGCR0212	RC	30	360465.01	6513644.96	374.75	-90	360
MGCR0213	RC	30	360464.96	6513654.98	374.58	-90	360
MGCR0214	RC	30	360464.98	6513665.07	374.82	-90	360
MGCR0215	RC	30	360464.96	6513674.95	374.96	-90	360
MGCR0216	RC	31	360464.94	6513684.93	375.42	-90	360
MGCR0217	RC	31	360464.98	6513694.91	375.88	-90	360
MGCR0218	RC	32	360464.95	6513704.95	376.34	-90	360
MGCR0219	RC	36	360464.95	6513704.95	376.34	-60	360
MGCR0223	RC	29	360474.93	6513595.05	378.36	-90	360
MGCR0224	RC	26	360474.98	6513604.95	375.92	-90	360

For personal use only

MGCR0225	RC	24	360474.96	6513615.00	373.89	-90	360
MGCR0226	RC	29	360474.97	6513625.01	373.88	-90	360
MGCR0227	RC	30	360475.00	6513635.03	374.12	-90	360
MGCR0228	RC	30	360474.98	6513645.03	374.14	-90	360
MGCR0229	RC	30	360474.92	6513654.95	374.28	-90	360
MGCR0230	RC	30	360475.00	6513665.07	374.51	-90	360
MGCR0231	RC	30	360475.04	6513674.94	374.98	-90	360
MGCR0232	RC	31	360475.01	6513684.95	375.51	-90	360
MGCR0233	RC	31	360474.92	6513694.93	375.90	-90	360
MGCR0234	RC	32	360475.09	6513705.02	376.41	-90	360
MGCR0235	RC	33	360474.97	6513710.80	376.98	-80	360
MGCR0236	RC	21	360474.71	6513727.44	365.51	-80	180
MGCR0237	RC	21	360474.96	6513733.48	365.47	-80	360
MGCR0238	RC	38	360472.63	6513787.35	380.41	-70	180
MGCR0239	RC	36	360472.72	6513788.24	380.29	-90	360
MGCR0240	RC	36	360473.89	6513796.67	379.64	-90	360
MGCR0241	RC	28	360484.94	6513594.97	377.80	-90	360
MGCR0242	RC	26	360485.05	6513604.96	375.01	-90	360
MGCR0243	RC	24	360484.94	6513614.94	373.60	-90	360
MGCR0244	RC	29	360485.03	6513624.96	373.57	-90	360
MGCR0245	RC	29	360484.99	6513635.03	373.97	-90	360
MGCR0246	RC	30	360484.98	6513644.99	374.01	-90	360
MGCR0247	RC	30	360485.05	6513654.97	374.03	-90	360
MGCR0248	RC	30	360484.99	6513665.04	374.58	-90	360
MGCR0249	RC	31	360485.04	6513675.03	375.18	-90	360
MGCR0250	RC	31	360484.98	6513684.93	375.71	-90	360
MGCR0251	RC	32	360484.98	6513694.99	376.06	-90	360
MGCR0252	RC	32	360485.07	6513704.96	376.74	-90	360
MGCR0253	RC	24	360485.04	6513723.61	365.75	-60	180
MGCR0254	RC	21	360485.13	6513724.94	365.78	-90	360
MGCR0255	RC	21	360484.74	6513734.47	365.32	-90	360
MGCR0256	RC	24	360484.98	6513738.37	365.29	-60	360
MGCR0257	RC	38	360483.43	6513784.87	380.30	-70	180
MGCR0258	RC	36	360483.39	6513785.34	380.37	-90	360
MGCR0259	RC	35	360484.02	6513795.36	379.36	-90	360
MGCR0260	RC	34	360484.76	6513804.56	378.79	-90	360
MGCR0261	RC	27	360494.99	6513594.99	376.93	-90	360
MGCR0262	RC	25	360495.05	6513605.03	374.19	-90	360
MGCR0263	RC	23	360495.08	6513615.05	372.83	-90	360
MGCR0264	RC	28	360495.01	6513625.03	372.95	-90	360
MGCR0265	RC	29	360494.97	6513634.98	373.54	-90	360
MGCR0266	RC	29	360494.96	6513644.94	373.76	-90	360
MGCR0267	RC	30	360494.96	6513655.02	374.07	-90	360
MGCR0268	RC	30	360494.94	6513664.98	374.59	-90	360
MGCR0269	RC	31	360495.01	6513674.99	375.30	-90	360
MGCR0270	RC	31	360495.03	6513684.95	375.99	-90	360

For personal use only

MGCR0271	RC	32	360495.02	6513695.02	376.06	-90	360
MGCR0272	RC	36	360495.02	6513695.02	376.06	-60	360
MGCR0273	RC	23	360495.07	6513717.70	367.05	-90	360
MGCR0274	RC	22	360494.93	6513725.14	366.80	-90	360
MGCR0275	RC	20	360495.20	6513734.80	365.01	-90	360
MGCR0276	RC	21	360495.05	6513742.92	365.00	-90	360
MGCR0277	RC	39	360491.77	6513776.45	380.71	-70	180
MGCR0278	RC	37	360491.97	6513777.09	380.63	-90	360
MGCR0279	RC	37	360492.64	6513781.13	380.40	-90	360
MGCR0280	RC	35	360494.84	6513790.22	379.50	-90	360
MGCR0281	RC	34	360495.09	6513800.16	378.72	-90	360
MGCR0282	RC	24	360504.93	6513644.96	373.78	-90	360
MGCR0283	RC	25	360505.03	6513655.05	374.25	-90	360
MGCR0284	RC	26	360504.95	6513664.93	375.01	-90	360
MGCR0285	RC	31	360504.92	6513675.04	375.89	-90	360
MGCR0286	RC	32	360504.96	6513685.02	376.19	-90	360
MGCR0287	RC	32	360504.96	6513691.10	376.27	-80	360
MGCR0289	RC	24	360505.07	6513715.07	368.11	-90	360
MGCR0290	RC	21	360505.02	6513724.97	365.10	-90	360
MGCR0291	RC	20	360504.93	6513733.54	365.00	-90	360
MGCR0293	RC	42	360506.35	6513766.01	381.10	-60	180
MGCR0294	RC	36	360506.45	6513766.73	381.00	-90	360
MGCR0295	RC	36	360505.37	6513774.81	380.80	-90	360
MGCR0296	RC	35	360504.90	6513785.01	379.53	-90	360
MGCR0297	RC	34	360504.42	6513793.00	378.82	-90	360
MGCR0298	RC	25	360514.93	6513645.00	374.04	-90	360
MGCR0299	RC	25	360515.03	6513654.98	374.59	-90	360
MGCR0300	RC	26	360514.98	6513665.03	375.15	-90	360
MGCR0301	RC	32	360515.01	6513675.04	376.31	-90	360
MGCR0302	RC	32	360514.95	6513685.01	376.64	-90	360
MGCR0304	RC	25	360514.83	6513704.60	369.13	-90	360
MGCR0306	RC	20	360514.84	6513725.32	364.92	-90	360
MGCR0309	RC	42	360514.52	6513764.40	380.61	-60	180
MGCR0310	RC	36	360515.09	6513764.95	380.49	-90	360
MGCR0311	RC	35	360514.36	6513775.05	380.09	-90	360
MGCR0312	RC	25	360524.94	6513655.01	374.94	-90	360
MGCR0313	RC	26	360524.98	6513664.99	375.69	-90	360
MGCR0314	RC	27	360525.06	6513675.06	376.53	-90	360
MGCR0315	RC	28	360525.03	6513680.99	376.88	-80	360
MGCR0316	RC	21	360524.97	6513695.27	370.05	-90	360
MGCR0318	RC	16	360524.84	6513714.94	365.33	-90	360
MGCR0319	RC	16	360525.11	6513725.49	364.91	-90	360
MGCR0321	RC	36	360524.90	6513754.74	380.58	-60	180
MGCR0322	RC	31	360524.92	6513755.77	380.44	-90	360
MGCR0323	RC	31	360525.05	6513765.16	380.05	-90	360
MGCR0324	RC	30	360524.86	6513775.01	379.48	-90	360

MGCR0325	RC	26	360535.09	6513655.05	375.33	-90	360
MGCR0326	RC	27	360534.96	6513665.00	376.13	-90	360
MGCR0327	RC	27	360534.99	6513675.01	376.66	-90	360
MGCR0329	RC	21	360534.65	6513696.55	370.97	-90	360
MGCR0330	RC	17	360534.87	6513705.19	366.48	-90	360
MGCR0331	RC	16	360534.97	6513714.99	365.92	-90	360
MGCR0332	RC	19	360534.86	6513718.23	365.98	-60	360
MGCR0333	RC	35	360535.02	6513748.60	380.53	-60	180
MGCR0334	RC	31	360535.03	6513749.46	380.31	-80	180
MGCR0335	RC	30	360534.95	6513755.11	380.02	-90	360
MGCR0336	RC	30	360535.00	6513764.95	379.54	-90	360
MGCR0337	RC	24	360545.03	6513560.11	378.72	-90	360
MGCR0338	RC	23	360545.22	6513570.16	377.53	-90	360
MGCR0339	RC	27	360545.07	6513580.32	376.22	-90	360
MGCR0340	RC	24	360544.65	6513590.20	373.67	-90	360
MGCR0341	RC	23	360545.11	6513600.21	372.77	-90	360
MGCR0342	RC	24	360544.95	6513610.19	373.07	-90	360
MGCR0343	RC	26	360545.07	6513654.97	375.74	-90	360
MGCR0344	RC	27	360544.96	6513664.99	376.64	-90	360
MGCR0345	RC	33	360545.09	6513671.89	376.82	-80	360
MGCR0346	RC	29	360544.98	6513685.17	373.30	-90	360
MGCR0348	RC	22	360545.04	6513705.08	366.06	-90	360
MGCR0349	RC	22	360545.06	6513714.85	366.20	-90	360
MGCR0351	RC	41	360544.99	6513744.65	380.00	-60	180
MGCR0352	RC	30	360544.99	6513745.32	379.95	-90	360
MGCR0353	RC	30	360545.22	6513755.31	379.36	-90	360
MGCR0354	RC	27	360555.09	6513655.02	376.45	-90	360
MGCR0355	RC	27	360554.99	6513665.02	376.82	-90	360
MGCR0356	RC	31	360556.31	6513676.50	375.47	-90	360
MGCR0357	RC	30	360554.97	6513684.99	374.65	-90	360
MGCR0358	RC	23	360555.13	6513700.92	367.07	-75	180
MGCR0359	RC	22	360554.99	6513708.49	366.43	-90	360
MGCR0361	RC	36	360555.01	6513733.64	380.48	-80	180
MGCR0362	RC	31	360554.99	6513740.25	380.04	-90	360
MGCR0363	RC	30	360555.01	6513750.06	379.24	-90	360
MGCR0364	RC	32	360565.06	6513655.04	376.75	-90	360
MGCR0365	RC	33	360564.93	6513664.02	377.08	-90	360
MGCR0366	RC	32	360564.97	6513675.05	376.24	-90	360
MGCR0367	RC	25	360564.92	6513689.83	368.83	-80	180
MGCR0368	RC	24	360564.69	6513695.33	368.20	-90	360
MGCR0369	RC	24	360565.07	6513700.19	368.35	-80	360
MGCR0370	RC	42	360565.05	6513724.46	380.76	-60	180
MGCR0371	RC	31	360565.09	6513725.21	380.73	-90	360
MGCR0372	RC	31	360565.00	6513734.95	380.29	-90	360
MGCR0373	RC	30	360564.79	6513745.54	379.52	-90	360
MGCR0374	RC	28	360575.08	6513659.78	377.12	-90	360

MGCR0375	RC	33	360574.68	6513670.01	377.34	-90	360
MGCR0376	RC	38	360574.70	6513670.41	377.43	-60	360
MGCR0377	RC	24	360572.25	6513691.50	368.93	-90	360
MGCR0378	RC	42	360574.82	6513715.19	381.16	-60	180
MGCR0379	RC	37	360574.91	6513716.00	381.04	-80	180
MGCR0380	RC	31	360574.97	6513720.05	380.78	-90	360
MGCR0381	RC	31	360574.95	6513729.89	380.57	-90	360
MGCR0382	RC	30	360575.07	6513740.06	379.78	-90	360
MGCR0383	RC	28	360584.99	6513660.12	377.42	-90	360
MGCR0384	RC	29	360585.07	6513670.36	378.17	-90	360
MGCR0385	RC	30	360585.87	6513680.48	379.12	-90	360
MGCR0386	RC	30	360588.57	6513690.25	379.94	-90	360
MGCR0387	RC	31	360587.89	6513701.89	380.81	-90	360
MGCR0388	RC	32	360585.06	6513710.03	381.10	-90	360
MGCR0389	RC	31	360584.85	6513719.12	380.95	-90	360
MGCR0390	RC	31	360585.03	6513729.97	380.38	-90	360
MGCR0391	RC	29	360595.01	6513670.10	378.51	-90	360
MGCR0392	RC	30	360594.98	6513680.08	379.42	-90	360
MGCR0393	RC	31	360594.92	6513690.04	380.12	-90	360
MGCR0394	RC	31	360594.78	6513699.88	380.97	-90	360
MGCR0395	RC	32	360594.99	6513709.85	381.23	-90	360
MGCR0396	RC	31	360594.90	6513720.14	380.77	-90	360
MGCR0397	RC	31	360594.76	6513729.86	380.11	-90	360
MGCR0399	RC	41	360555.04	6513732.73	380.73	-60	180
MGCR0400	RC	31	360564.88	6513675.69	376.12	-60	360
MGCR0401	RC	54	360385.15	6513665.37	379.63	-50	360
MGCR0402	RC	52	360394.98	6513665.34	379.24	-50	360
MGCR0403	RC	36	360434.98	6513680.93	376.00	-60	360
MGCR0405	RC	42	360454.99	6513695.06	375.78	-50	360
MGCR0407	RC	31	360565.07	6513730.00	380.20	-90	360
MGCR0408	RC	31	360565.07	6513740.00	380.20	-90	360
MGCR0409	RC	33	360315.00	6513650.00	383.00	-90	360
MGCR0410	RC	33	360315.00	6513660.00	383.00	-90	360
MGCR0411	RC	33	360315.00	6513670.00	383.00	-90	360

Appendix 3

Munda Grade Control Drilling JORC Table 1 Checklist

Section 1 Sampling Techniques and Data (Criteria in this section apply to all succeeding sections)

Criteria	JORC Code explanation	Commentary
Sampling techniques	<p>Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</p> <p>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</p> <p>Aspects of the determination of mineralisation that are Material to the Public Report.</p> <p>In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information.</p>	<ul style="list-style-type: none"> RC drill samples were taken at 1m intervals via a cyclone and fixed cone splitter. Samples of nominally 1.5kg were collected in calico bags and submitted to the Intertek Genalysis sample preparation facility in Kalgoorlie. Samples were pulverised to a nominal 85% passing 75µm. Approximately 200g of the pulverised product from each sample was then transferred to the Intertek Genalysis facility in Perth. Samples were analysed for Au via 50g fire assay with an ICP-OES determination of gold concentration. The samples for each 1m interval remaining after removal of the nominal 1.5kg split were laid out in rows at the drill site and this material used for geological logging
Drilling techniques	<p>Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</p>	<ul style="list-style-type: none"> RC drilling using a face-sampling hammer with a drill bit (hole) diameter of approximately 133mm.
Drill sample recovery	<p>Method of recording and assessing core and chip sample recoveries and results assessed.</p> <p>Measures taken to maximize sample recovery and ensure representative nature of the samples.</p> <p>Whether a relationship exists between sample recovery and grade and whether sample bias may have</p>	<ul style="list-style-type: none"> Sample recovery is assessed as having been reasonable overall. Samples submitted for assay were weighed at the lab and sample weights reported – they show some small samples in the 1st few metres of drill holes and an average weight of 2.2kg. There is no evidence of sample bias

Criteria	JORC Code explanation	Commentary
	occurred due to preferential loss/gain of fine/coarse material.	
Logging	<p>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p> <p>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</p> <p>The total length and percentage of the relevant intersections logged.</p>	<ul style="list-style-type: none"> • Drill chips were logged at 1m intervals corresponding to the sample intervals and according to Auric's coding system in sufficient detail to support mineral resource estimation, mining studies and metallurgical studies. • The logging is qualitative in nature. • Chips were not photographed but a small proportion of chips from each interval have been retained in compartmentalised chip trays. • The total length logged is 10,895m which is 100% of the drilled intervals
Sub-sampling techniques and sample preparation	<p>If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</p> <p>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</p> <p>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</p> <p>Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling.</p> <p>Whether sample sizes are appropriate to the grain size of the material being sampled.</p>	<ul style="list-style-type: none"> • RC chips were sampled at 1m intervals via a fixed cone splitter and samples were dry. • A duplicate sample was taken with every 15th sample using a 2nd chute on the splitter and a pulp standard was inserted after every 30 samples such that 10% of samples submitted for assay are either duplicates or standards. • The duplicate assays show very good correlation with original assays (Pearson Coefficient = 0.99). • Sample sizes (nominally 1.5kg) were pulverised prior to subsampling of 50g for fire assay and are considered appropriate.
Quality of assay data and laboratory tests	<p>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</p> <p>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</p> <p>Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</p>	<ul style="list-style-type: none"> • In addition to standards submitted by Auric, the laboratory (Intertek Genalysis) analysed standards and blanks inserted with each fire assay batch. Comparison of expected results for standards with the assays received for the RC samples indicates accurate and precise laboratory data.
Verification of sampling	The verification of significant intersections by either independent or alternative company personnel.	<ul style="list-style-type: none"> • Anomalous assays have been verified by alternative Auric personnel. • No twinned holes have been drilled.

Criteria	JORC Code explanation	Commentary
and assaying	The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data.	<ul style="list-style-type: none"> Field sample records are merged with assay results from the lab and various cross reference checks, both manual and computational used to ensure data integrity. Data is stored on two separate computers and backed up routinely. No adjustment has been made to assay data
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control.	<ul style="list-style-type: none"> Hole collar positions were marked out by a qualified surveyor using a DGPS and located again following completion by the same surveyor. Angled holes and a small proportion of vertical holes were surveyed downhole using a north-seeking gyroscope. Collar surveys included an elevation measurement and are located within the MGA-GDA94 grid system, Zone 51
Data spacing and distribution	Data spacing for reporting of Exploration Results. Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	<ul style="list-style-type: none"> 351 holes were drilled on a 10m x 10m pattern to a vertical depth of up to 54m, averaging 31m The data spacing is sufficient to estimate mineral resources but will require greater density for ore definition should open pit mining be undertaken No sample compositing
Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	<ul style="list-style-type: none"> There are several structural controls and the drill holes will intersect structures at variable orientations. However, the high drill density will nullify sampling bias in terms of geostatistical resource estimation
Sample security	The measures taken to ensure sample security.	<ul style="list-style-type: none"> Auric personnel were present during all drilling and sampling and individual samples were bagged and sealed in larger polywoven bags with no opportunity for tampering. Samples were transported to the lab by Auric personnel
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	<ul style="list-style-type: none"> Duplicate samples were taken after every 15 samples and show very good correlation, demonstrating that sampling techniques were appropriate and robust

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	<ul style="list-style-type: none"> • The Munda resource lies within M15/87 which is held by Widgie Gold Pty Ltd, a wholly owned subsidiary of Auric Mining Ltd who hold all the mineral rights, excluding Ni and Li. • M15/87 was granted on 06/08/1984 and expires on 05/08/2026. • There are no known impediments to mining in the area beyond routine compliance requirements
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<ul style="list-style-type: none"> • Early exploration (1967-1995) focused on nickel. • WMC (1996-1998) recognised gold potential and drilled for both nickel and gold including 81 diamond and RC holes in the current resource area. • Resolute (1999-2000) optioned the project from WMC, drilled 37 holes and excavated a small trial mine with ore carted to the Higginsville gold plant. • Titan Resources (2005-2006), Consolidated Nickel (2006-2007), Eureka Mines (2016) and Estrella Resources (2019) all undertook drilling programmes focused in the current resource area.
Geology	Deposit type, geological setting and style of mineralisation.	<ul style="list-style-type: none"> • Gold mineralisation is hosted near the intersections of a northeasterly striking structure with structures parallel to the northeasterly dipping contact between basalts and overlying serpentinised ultramafics. • The ultramafic contact is also host to nickel mineralisation such that gold and nickel deposits overlap.
Drill hole Information	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> ○ easting and northing of the drill hole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. 	<ul style="list-style-type: none"> • Refer to: Appendix 1: Significant gold intervals at 0.5g/t cut-off Appendix 2: Drill Hole Details

Criteria	JORC Code explanation	Commentary
	If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	
Data aggregation methods	In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated.	<ul style="list-style-type: none"> • Samples were collected at 1m intervals and aggregate intervals incorporate only 1m intervals. • Samples were aggregated at a 0.5g/t cut-off with no top-cut applied
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. 'down hole length, true width not known').	<ul style="list-style-type: none"> • Down hole lengths are reported and mineralisation geometry appears to be quite variable such that true widths are not known
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	<ul style="list-style-type: none"> • Refer to Figure 1 and Appendix 1
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	<ul style="list-style-type: none"> • Reporting is balanced – only significant Au values at a 0.5g/t cut-off are tabulated and this is acknowledged
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	<ul style="list-style-type: none"> • Not applicable
Further work	The nature and scale of planned further work (e.g. tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	<ul style="list-style-type: none"> • The 10m x 10m grade control drill data will be used to generate a resource estimate which will then be compared with the estimate for the full resource which was defined on a nominal 25m x 25m drill pattern and encloses the grade control drilling